



## Systematic Calval SWIM - CFOSAT

CNES, CASYS

Synthesis report on parameters quality: cycle 11 (2019-03-11 - 2019-03-24)



# Contents

<b>I</b>	<b>Introduction</b>	<b>3</b>
1	Context	4
2	Glossary	5
<b>II</b>	<b>Coverage</b>	<b>6</b>
3	Coverage nadir 5Hz	7
<b>III</b>	<b>Editing</b>	<b>8</b>
4	Nadir 5Hz Nsec	9
<b>IV</b>	<b>SWIM nadir monitoring</b>	<b>11</b>
<b>5</b>	<b>Current cycle maps of valid SWH and wind speed</b>	<b>12</b>
5.1	Current cycle map of valid SWH . . . . .	12
5.2	Current cycle map of wind speed . . . . .	13
<b>6</b>	<b>SWIM nadir versus ECMWF model</b>	<b>14</b>
6.1	Long term monitoring along track for SWH . . . . .	14
6.2	Current cycle map of SWH difference with ECMWF model . . . . .	14
<b>7</b>	<b>Wind speed versus ECMWF model</b>	<b>15</b>
7.1	Long term monitoring along track for wind speed . . . . .	15
7.2	Current cycle map of Wind speed difference with ECMWF model . . . . .	15

Main Part I  
Introduction

# Part 1

## Context

**Document overview** This document reports the major features that characterize the quality of SWIM/CFOSAT data. It is released on a cyclic basis.

The main goals of the document are:

- to report any changes in software and data processing;
- to present the main instrumental parameters;
- to provide insights on data quality and coverage.

**Software version** This cycle was produced with:

- product version: 5.1.2;
- CDB version: 21\_28;
- CASYS version: 2.5.5.

**Specific events** Nothing to report.

**Long term monitoring** Statistics are provided on a long-term prospect, starting from April 19th, 2019 (cycle 14).

## Part 2

# Glossary

**Track, Pass** refers to a half-orbit of CFOSAT.

**Cycle** refers to the 13-day period that takes CFOSAT to come back to the same position.

**AWWAIS** SWIM processing chain in the French ground segment associated with a version number.

Main Part II

Coverage

## Part 3



# Coverage nadir 5Hz

Coverage is monitored by the presence flag, which gives the percentage of nadir points available in CFOSAT Level-2 products regardless of surface type. This information is obtained by comparing the 5Hz resolution time with the theoretical ground track.

**Missing data cycle 011** No missing data.

Table 3.1: SWIM nadir 5Hz coverage

Percentage on current cycle	Cycle 11
Percentage of available measurements over ocean	99.91 %
Percentage of missing measurements over ocean	0.09 %

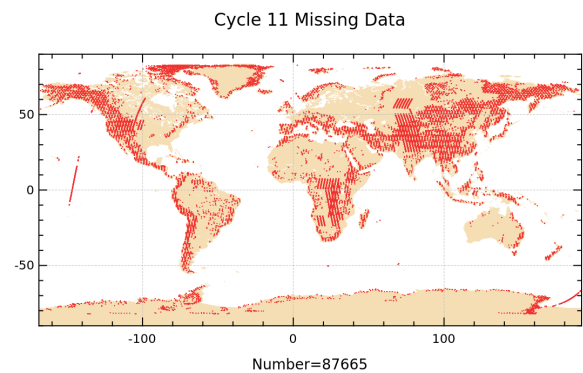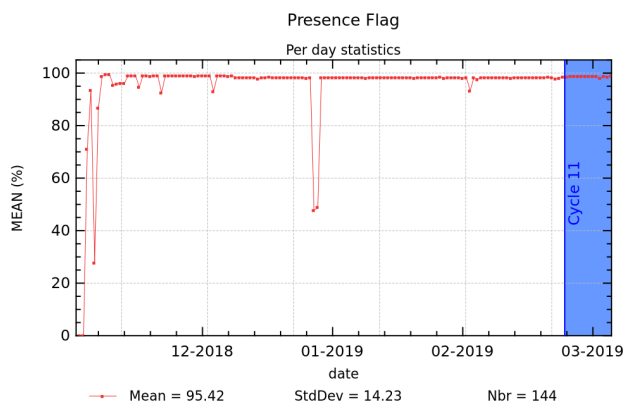

## Main Part III

# Editing



## Part 4

# Nadir 5Hz Nsec

The data are edited based on two types of criteria: quality (flag) and thresholds, both defined in the table below. The quality criterium is applied first. It is based on the SWH flag that is included in the Level-2 products and illustrated by the "Edited data by quality control" figure below. This flag takes into account surface (land) and sea-ice coverage at a threshold defined in the product attributes. As for the second criterium, thresholds on several variables are applied. Values outside minimal and maximal limits are rejected and are not taken into account in the statistical analyses.

Maps in this part represent data on land and ocean for the current cycle, whereas temporal monitorings are given on ocean only.



Table 4.1: Thresholds for data editing

Variables 5Hz	Min value	Max value
nadir_swh_nsec	0	20
nadir_swh_nsec_used	10	20
nadir_swh_nsec_std	0	$0.4+SWH.ALTI*0.028$
wind_speed	0	30
nadir_sigma0	5	25
nadir_sigma0_std	0	3.0
nadir_sigma0_used	10	20
flag_swh	0	0
ice_flag	0	0


Table 4.2: SWIM nadir 5Hz coverage

Percentage on current cycle	Cycle 11
Percentage of rejected points due to quality flag swh including product ice flag over ocean	15.94 %
Additional percentage of threshold rejection	1.36 %
Total percentage of rejected measurements over ocean	17.30 %

Edited data by quality control  
 flag\_valid\_swh\_nsec != 0.00

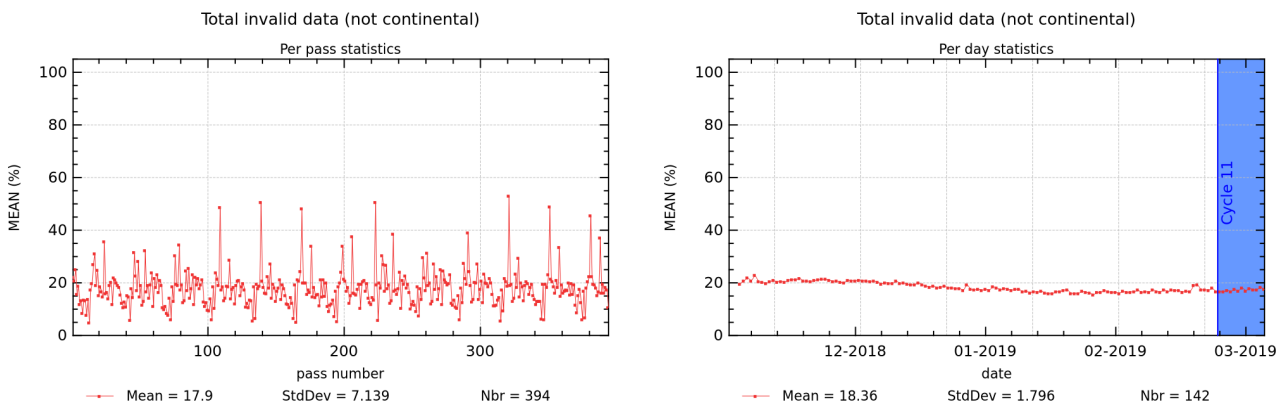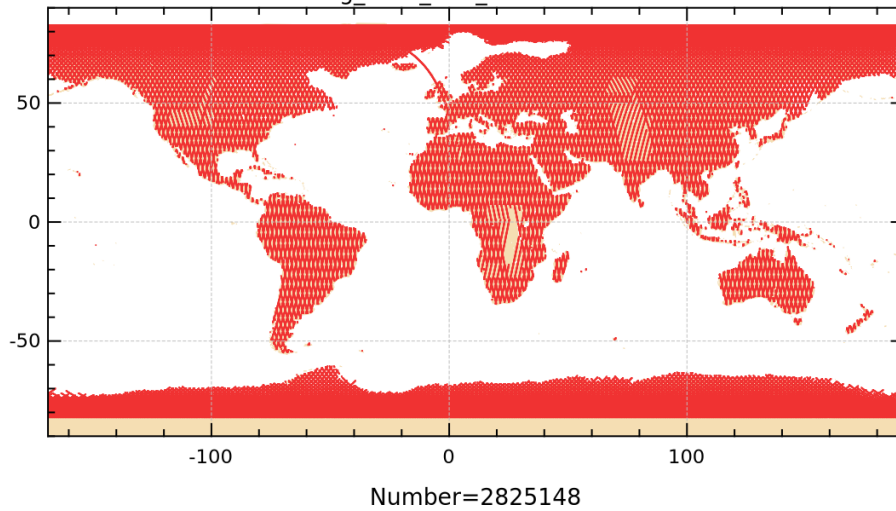

The figure on the left represents rejected values based on the editing criteria listed in Table 4.1. The map shows the SWH values of rejected points in colour. When this representation is not possible (masked points, non-computed values) points are represented in black.

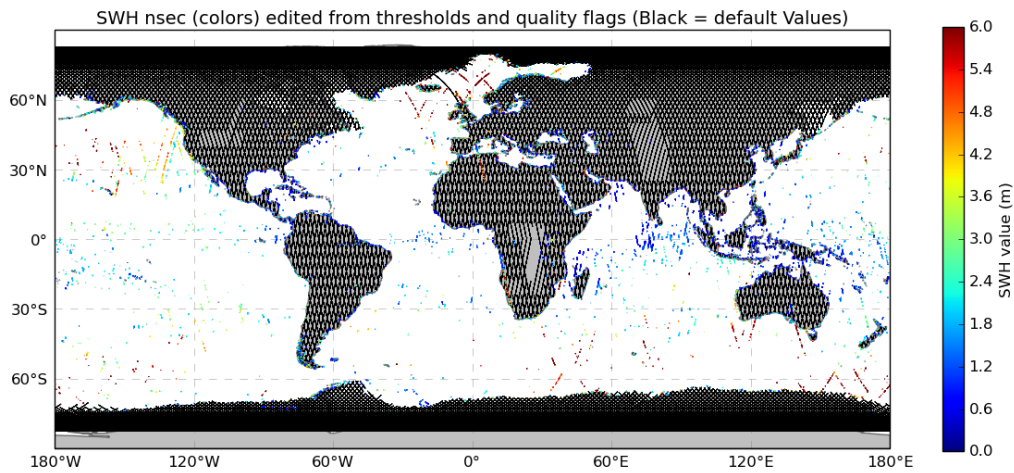

## Main Part IV


# SWIM nadir monitoring

## Part 5


# Current cycle maps of valid SWH and wind speed

### 5.1 Current cycle map of valid SWH

Two types of nadir waves are monitored: native SWH and Nsec SWH. The native SWH is the output of the adaptive retracking at 5Hz resolution. The Nsec SWH is the native SWH compressed with a sliding window of N seconds; here Nsec has a 5Hz resolution. In this part, only valid data are assessed, i.e. all values rejected based on the editing described previously are not taken into account.

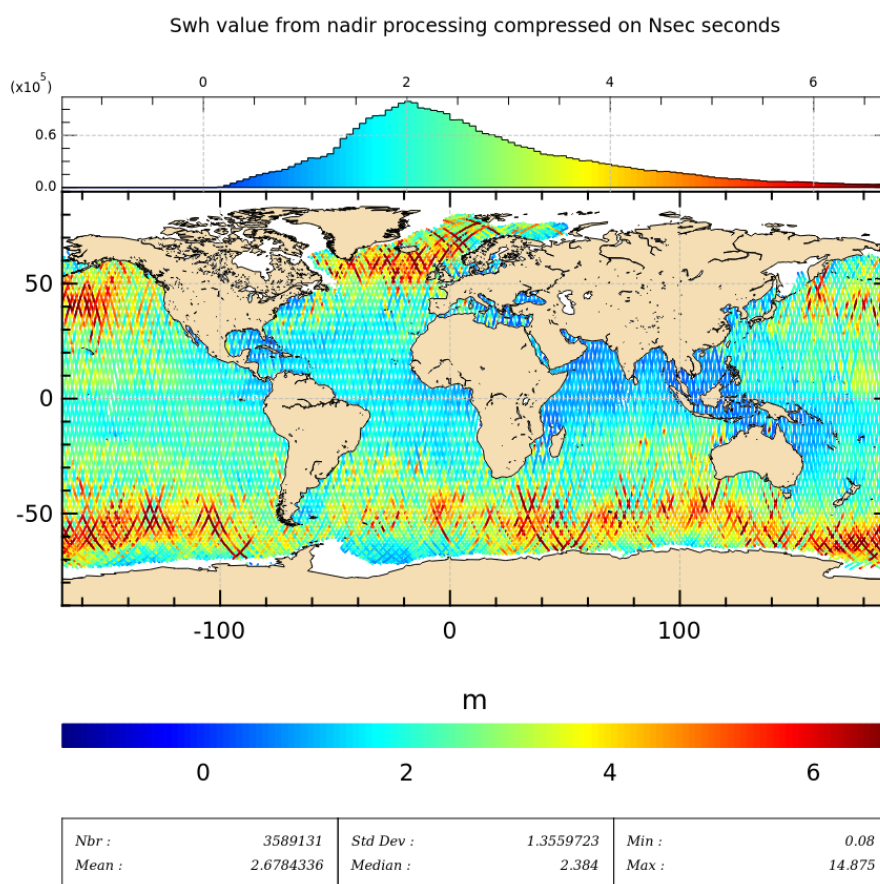

## 5.2 Current cycle map of wind speed

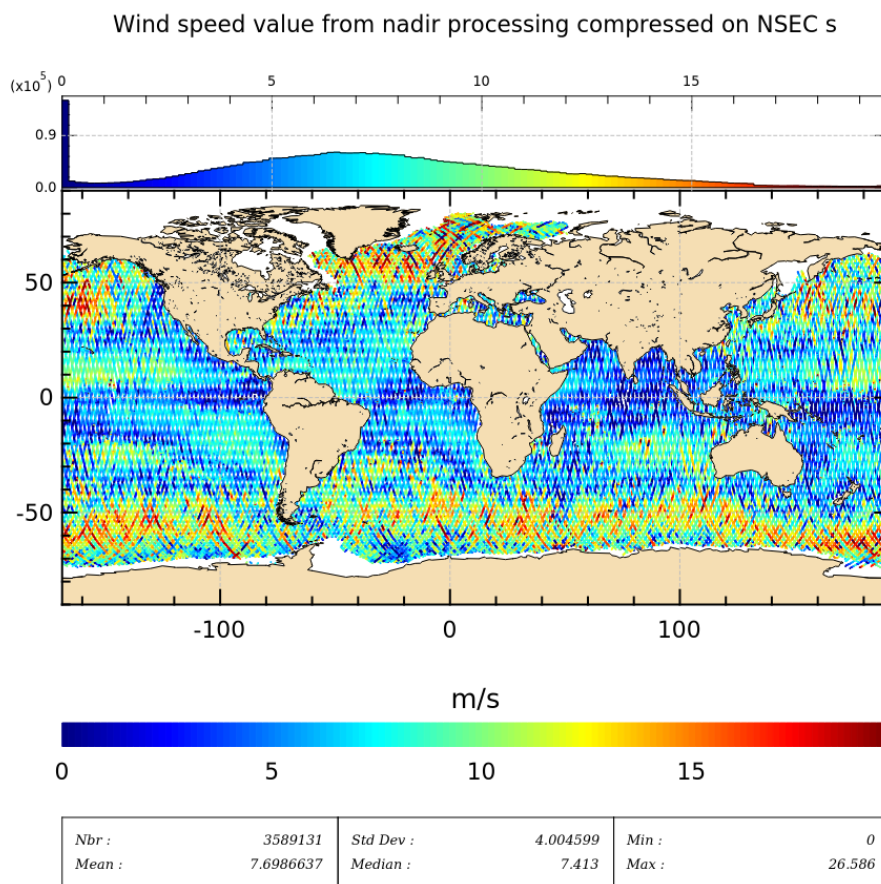


## Part 6

# SWIM nadir versus ECMWF model


The following figures compare SWH from SWIM nadir to that of the ECWFW model. The editing criteria applied to SWIM data are equally applied to ECMWF in order to perform a direct comparison.

### 6.1 Long term monitoring along track for SWH

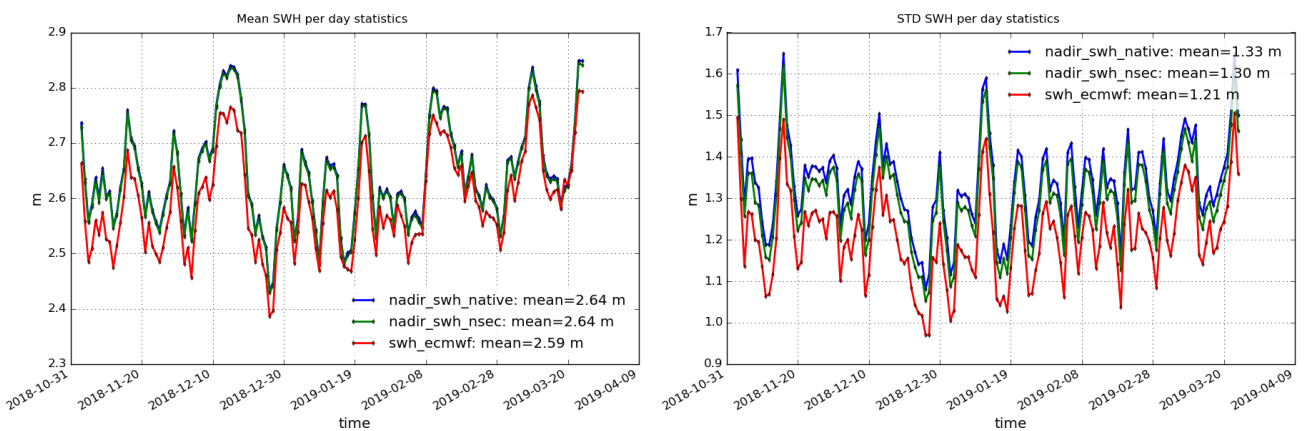

### 6.2 Current cycle map of SWH difference with ECMWF model

This maps represent the difference SWIM nadir - ECMWF for the current cycle.

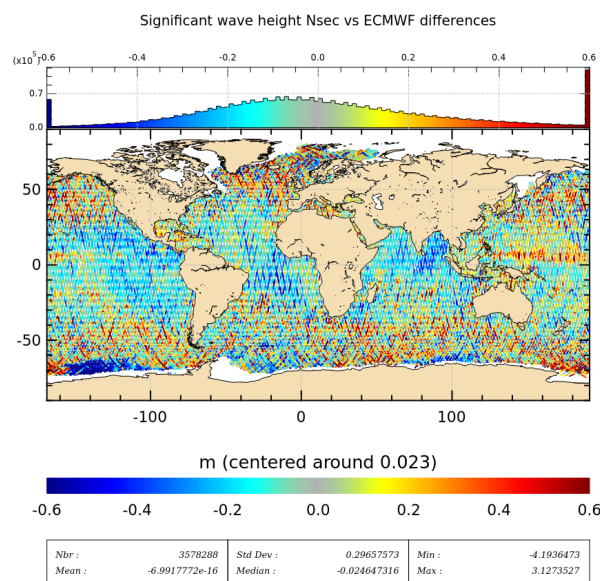


# Part 7

## Wind speed versus ECMWF model

The following figures compare the wind speed from SWIM nadir to that of the ECMWF model.

### 7.1 Long term monitoring along track for wind speed

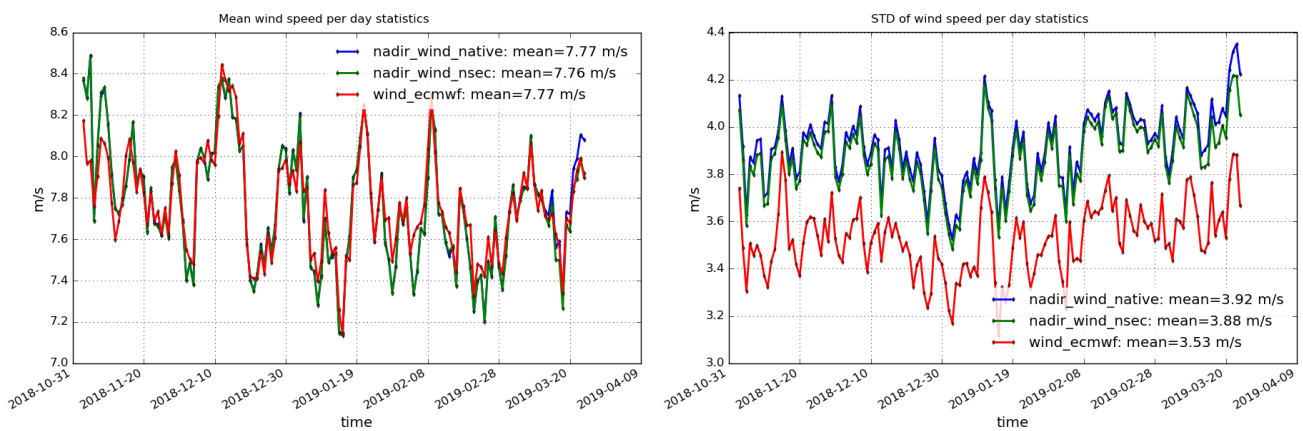

### 7.2 Current cycle map of Wind speed difference with ECMWF model

This maps represent the difference Wind Nadir (Nsec) - ECMWF for the current cycle.

