



Jason-1 GDR Quality Assessment Report

Cycle 069

28-11-2003 30-11-2003

Prepared by :	G. Pontonnier, CLS M. Ablain, CLS B. Soussi, CLS P. Thibaut, CLS MH. De Launay, CLS	
Accepted by :	J. Dorandeu, CLS	
Approved by :	P. Vincent, CNES	



1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the Jason-1 mission. The document is associated with data dissemination on a cycle by cycle basis. This document reports results from Jason-1 GDRs.

The objectives of this document are :

- To provide a data quality assessment
- To provide users with necessary information for data processing
- To report any change likely to impact data quality at any level, from instrument status to software configuration
- To present the major useful results for the current cycle

It is divided into the following topics:

- General quality assessment and cycle overview**
- Poseidon-2 altimeter and sensor**
- CALVAL main results**
- Jason-1 Long term performance monitoring**
- Particular investigations**
- General warnings**

2 General quality assessment and cycle overview

2.1 Software version

This cycle has been produced with the CMA Reference Software V6.2_03. The content of this science software version is described in (Vincent et al., 2003 [1]).

2.2 Cycle quality and performances

208 passes are missing on this cycle as a result of mission interruption due to safe hold mode. Therefore crossover and along track statistics are not relevant.

For this cycle, the crossover standard deviation is 6.48 cm rms. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50|$ deg.) it lowers to 4.73 cm rms.

The standard deviation of Sea Level Anomalies (SLA) relative to a 7-year mean (based on T/P data) is 11.55 cm. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50|$ deg.) it lowers to 10.37 cm.

- Performances from crossover differences are detailed in the dedicated [section Crossover statistics](#).
- Detailed CALVAL results are presented in [section 4](#).

2.3 Missing measurements

As a result of mission interruption due to safe hold mode, passes 1 to 208 are missing and pass 209 has 85% of missing measurements over ocean.

Missing measurements relative to a nominal ground track are plotted on [section Missing measurements](#).

3 Poseidon-2 altimeter and sensor

3.1 Sensor status

A detailed assessment of the Poseidon-2 sensor is made in a separate bulletin to be found on the AVISO website.

3.2 Poseidon-2 altimeter status

This section presents the general status of the altimeter for main instrumental variations through the Jason-1 mission. Two calibration modes are performed to monitor the altimeter internal drifts and to compute the altimetric parameters. They are programmed about three times per day, over land.

The CAL1 mode measures the Point Target Response (PTR) of the altimeter in Ku and C bands. Among the parameters extracted from the PTR are :

- the internal path delay
- the total power in the PTR


The evolutions of these parameters as a function of time are plotted to monitor the ageing of the altimeter.

Notice that in the Jason-1 products, the range is corrected for the internal path delay and the backscatter coefficient takes into account the total power of the measured PTR.

3.2.1 Monitoring of the internal path delay


POSEIDON2 – Cycle 001 to Cycle 069

Difference of travel between E and R lines of the PTR in Ku band

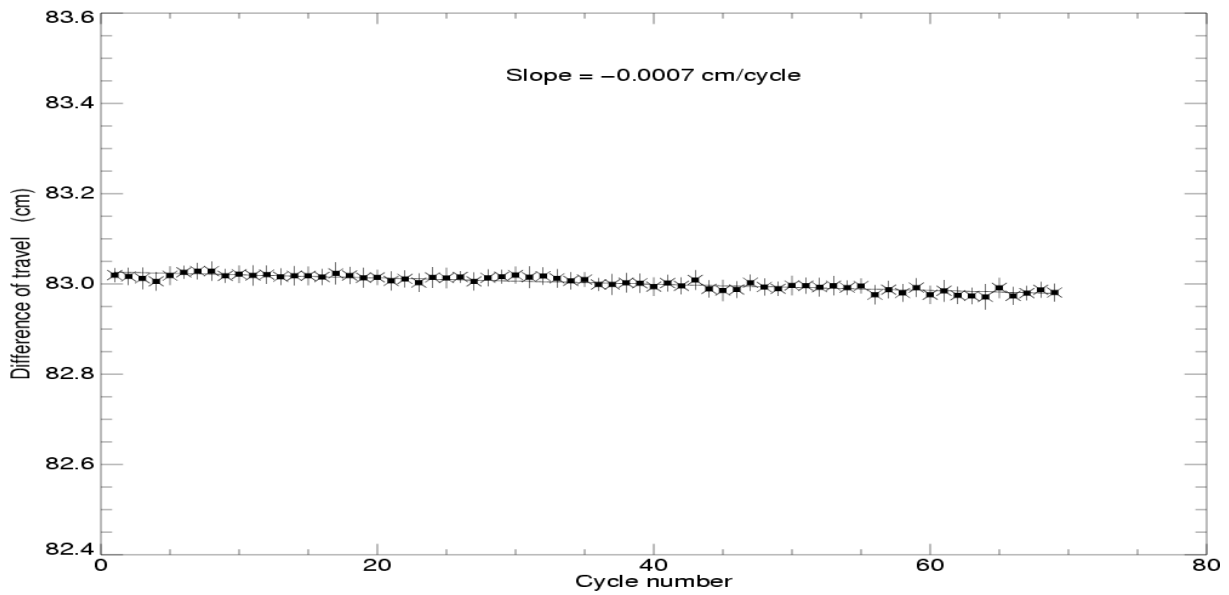

POSEIDON2 – Cycle 069


Difference of travel between E and R lines of the PTR in C band

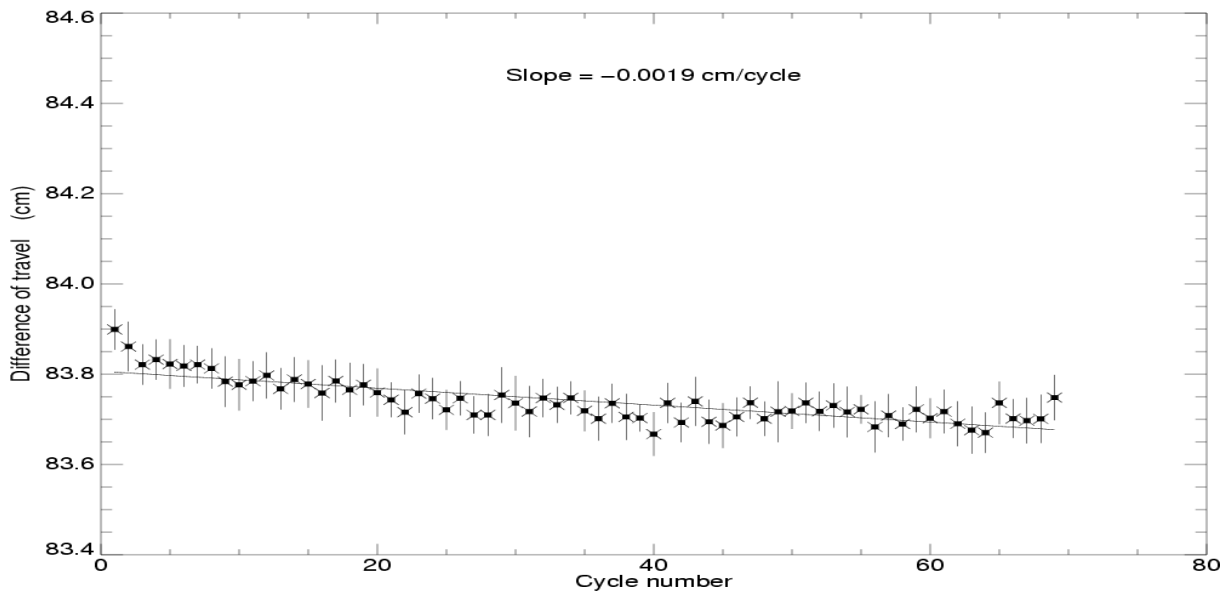

3.2.2 Monitoring of the total power in the PTR


POSEIDON2 – Cycle 069

Total power of the PTR in Ku band

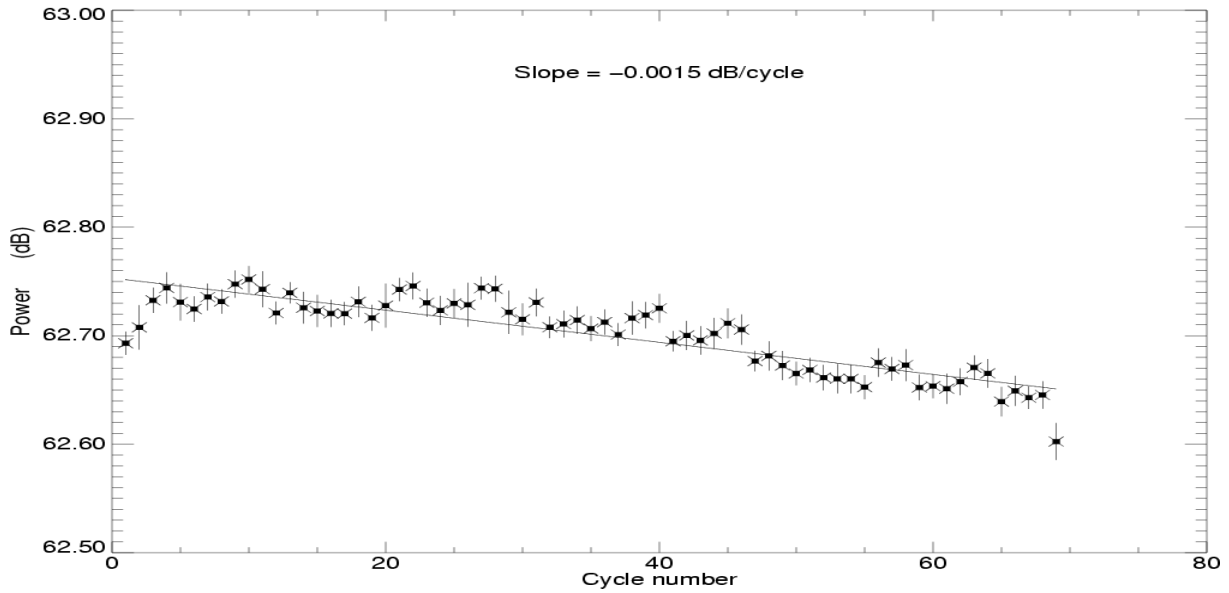

POSEIDON2 – Cycle 069

Total power of the PTR in C band

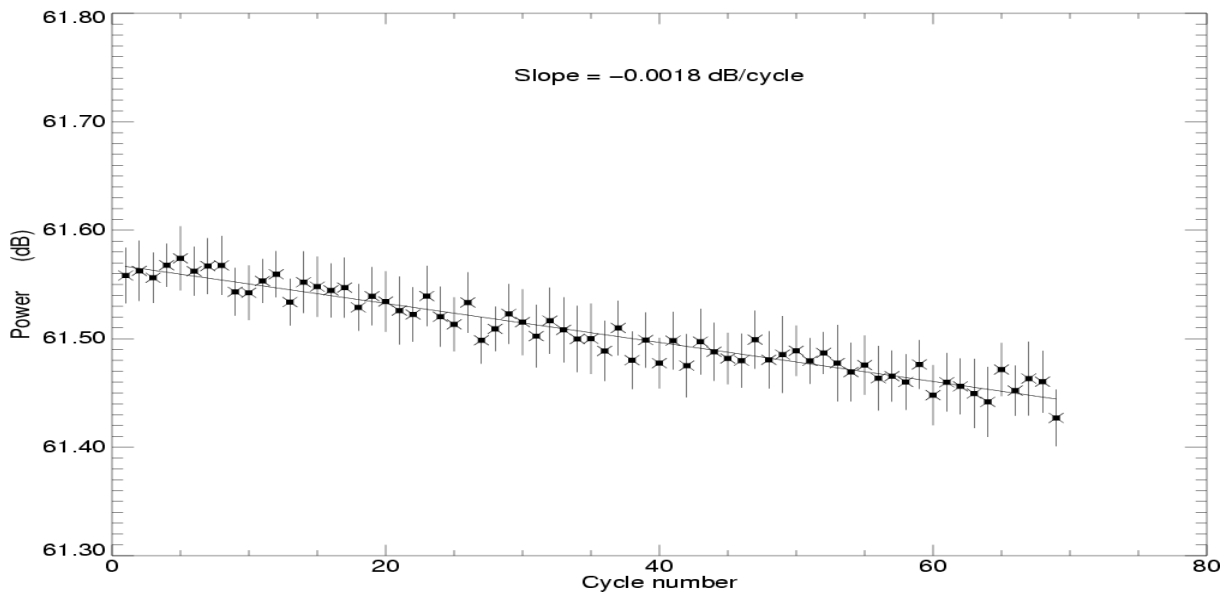


4 CALVAL main results

This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

4.1 Missing measurements

The map below illustrates missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

Missing measurements
Jason-1 Cycle 069 (28/11/2003 / 30/11/2003)

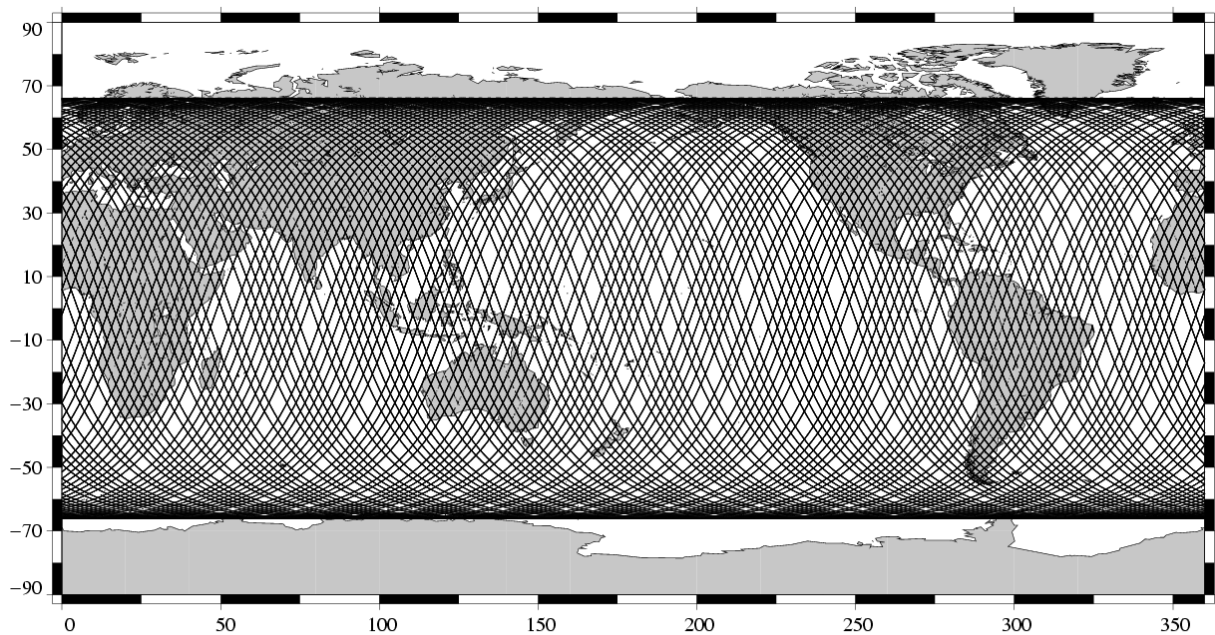

4.2 Edited measurements

Editing criteria are defined for the GDR product in Aviso and PODAAC User Handbook [2]. The editing criteria are defined as minimum and maximum thresholds for various parameters. Measurements are edited if at least one parameter does not lie within those thresholds. These thresholds are expected to remain constant throughout the Jason-1 mission, so that monitoring the number of edited measurements allows a survey of data quality.

In the following, the altimeter state flag (*alt_state_flag*) is used instead of the radiometer state flag (*rad_state_flag*). Indeed, this allows to keep more data near the coasts and then to detect potential anomalies in these areas. Furthermore, there is no impact on global performance estimations since the more significant results are derived from analyses in open ocean areas.

The rain flag is not used for data selection since it is not yet tuned.


The number and percentage of points removed by each criterion is given on the following table. Note that these statistics are obtained with measurements already edited for altimeter land flag (17.00 % of points removed) and ice flag (9.95 % of points removed).

Parameters	Min thresh- old	Max thresh- old	Unit	Nb removed	% re- moved
Sea surface height	-130.000	100.000	<i>m</i>	1560	1.62
Sea level anomaly	-10.000	10.000	<i>m</i>	6622	6.88
Nb measurements of range	10.000	-	-	1808	1.88
Std. deviation of range	0.000	0.200	<i>m</i>	2092	2.17
Square off nadir angle	-0.200	0.160	<i>deg</i> ²	2001	2.08
Dry tropospheric correction	-2.500	-1.900	<i>m</i>	4	0.00
Inverted barometer correction	-2.000	2.000	<i>m</i>	3	0.00
JMR wet tropospheric correction	-0.500	-0.001	<i>m</i>	4782	4.97
Ionospheric correction	-0.400	0.040	<i>m</i>	1800	1.87
Significant wave height	0.000	11.000	<i>m</i>	1231	1.28
Sea State Bias	-0.500	0.000	<i>m</i>	1233	1.28
Backscatter coefficient	7.000	30.000	<i>dB</i>	1006	1.04
Ocean tide	-5.000	5.000	<i>m</i>	853	0.89
Equilibrium tide	-0.500	0.500	<i>m</i>	0	0.00
Earth tide	-1.000	1.000	<i>m</i>	0	0.00
Pole tide	-15.000	15.000	<i>m</i>	0	0.00
Altimeter wind speed	0.000	30.000	<i>m.s</i> ⁻¹	1384	1.44
Global statistics of edited measurements by thresholds	-	-	-	8374	8.70


4.2.1 Figures

The following two maps are complementary: they show respectively the removed and selected measurements in the editing procedure.


Edited measurements
Jason-1 Cycle 069 (28/11/2003 / 30/11/2003)

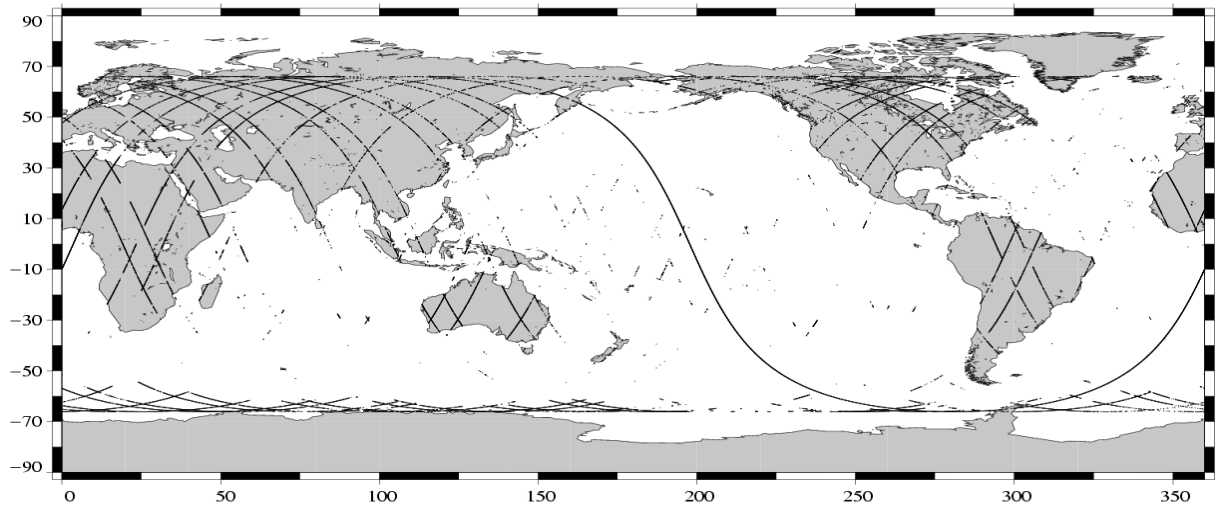

Valid data
Jason-1 Cycle 069 (28/11/2003 / 30/11/2003)

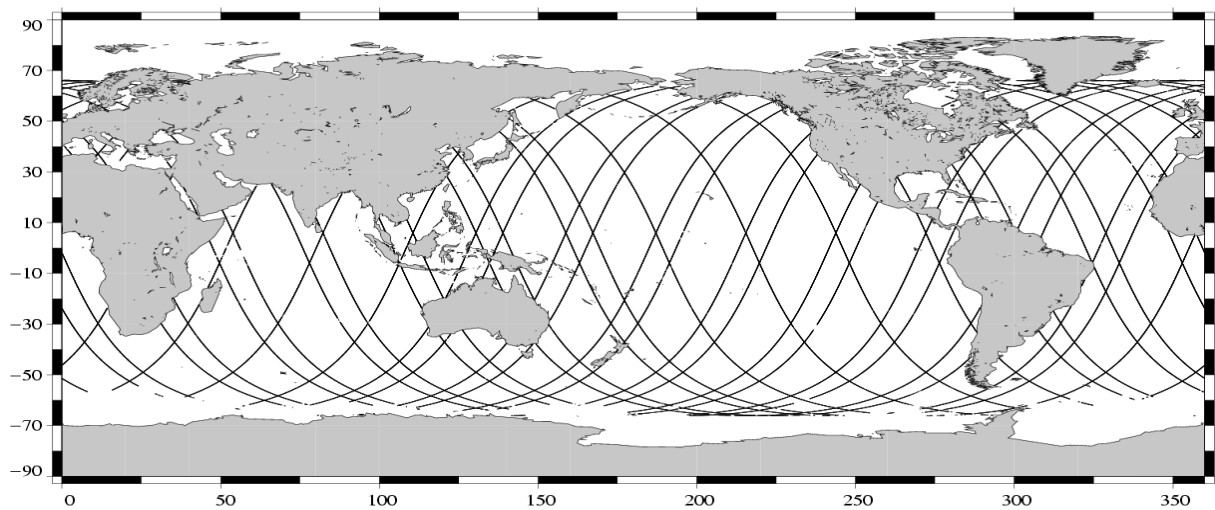

Percentage of valid data relative to the nominal pass
Jason-1 Cycle 069 (28/11/2003 / 30/11/2003)

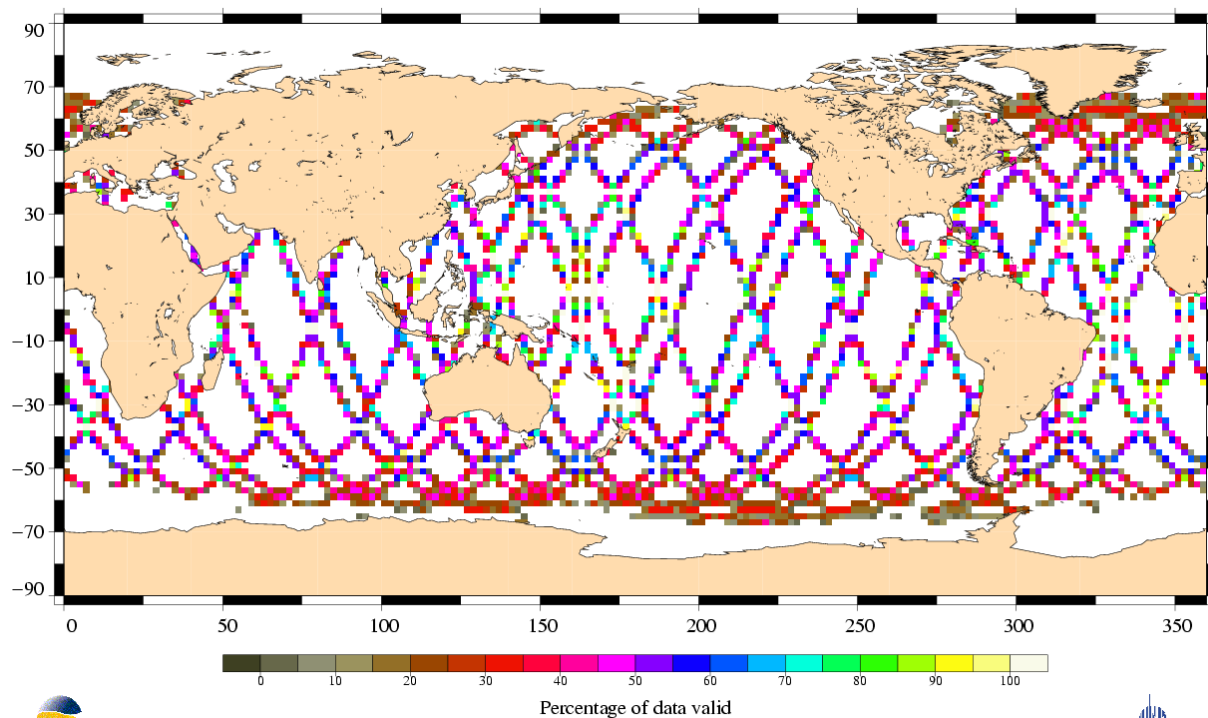

4.2.2 Comments

Passes 209, 210 and 95% of pass 211 are edited due to the tropospheric radiometer correction set to default value.

For the purpose of this quality assessment report, the GOT99.2 GDR field tide model has been replaced by GOT99.3 since the former is not available over the Black Sea, the Caspian and the Baltic sea.


Wet zones appear in the plot of removed data, as it was also the case for Topex and Poseidon altimeters: measurements may be corrupted by rain.

Compared with the usual maps obtained for Topex, there are less removed data in these zones and in the areas of strong sea states.

4.3 Altimeter parameters


In order to assess and to monitor altimeter parameter measurements, histograms of Jason-1 Ku-band Significant Wave Height (SWH), Backscatter coefficient (Sigma0) and RMS of altimeter range are computed for the valid data set previously defined.

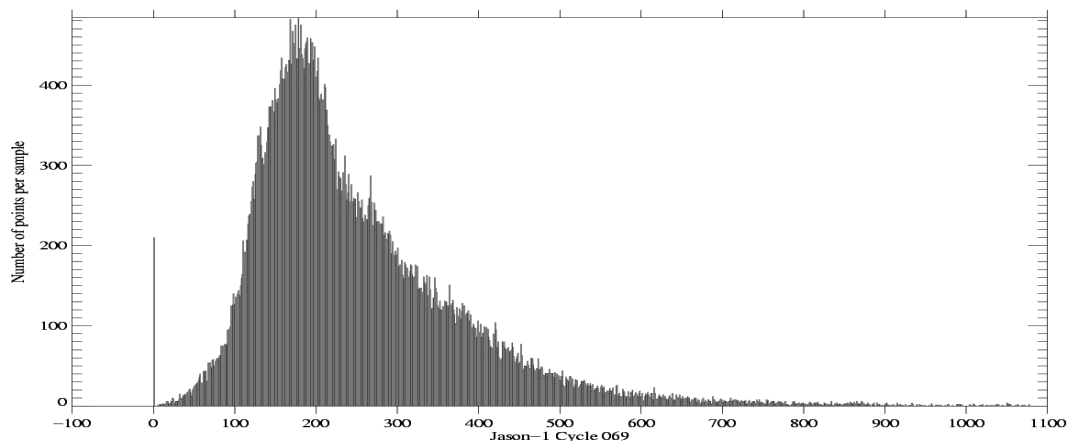

Ku-band Significant Wave Height (unit : cm)




	Global nb of points : 87866	Sel. nb of points : 87866	Sample interval : 1.000	
	Global mean : 248.068	Selected mean : 248.068	Maximum value : 1077.300	
	Global Std : 125.086	Selected std : 125.086	Minimum value : 0.800	

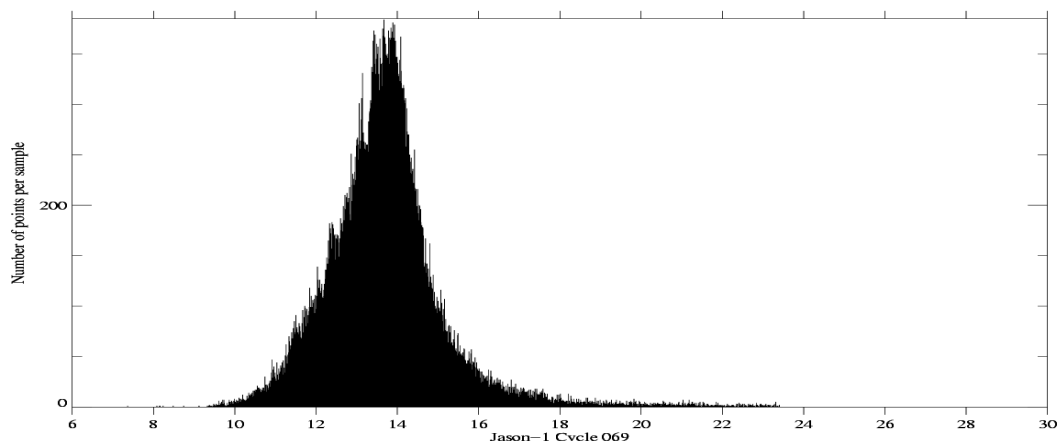Ku-band Backscatter Coefficient (unit : db)



	Global nb of points : 87866	Sel. nb of points : 87866	Sample interval : 0.010	
	Global mean : 13.687	Selected mean : 13.687	Maximum value : 23.400	
	Global Std : 1.461	Selected std : 1.461	Minimum value : 7.360	

RMS of Ku-band range (unit : cm)

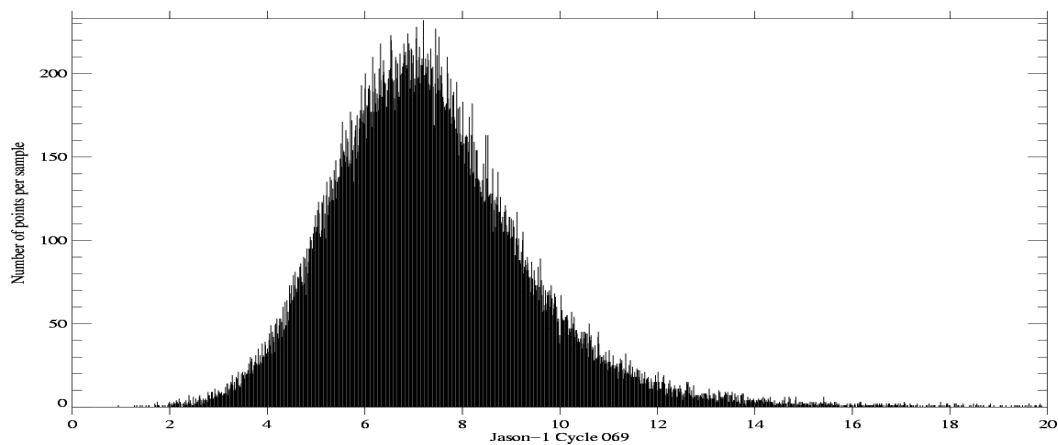

	Global nb of points : 87866	Sel. nb of points : 87866	Sample interval : 0.010	
	Global mean : 7.307	Selected mean : 7.307	Maximum value : 19.880	
	Global Std : 1.970	Selected std : 1.970	Minimum value : 0.940	

4.4 Crossover statistics

SSH crossover statistics are computed from the valid data set. They are used to estimate the data quality and to monitor the system performances.



After data editing and using the standard Jason-1 algorithms, the crossover standard deviation is about 4.73 cm rms, when using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50|$ deg.).

4.5 SSH variability

4.5.1 Jason-1 Sea Level Anomalies

Repeat-track analysis is routinely used to compute Sea Level Anomalies (SLA) relative to the previous cycle and relative to a mean profile. SLA relative to a 7-year mean (based on TOPEX/Poseidon data) shows general oceanic features in good agreement with what is observed with TOPEX/Poseidon.


The SSH differences relative to the previous cycle 068 are plotted on the bottom figure. The differences seem homogeneous and do not exhibit any particular trackiness pattern, showing the good quality of the orbit calculation in the Jason-1 GDRs.

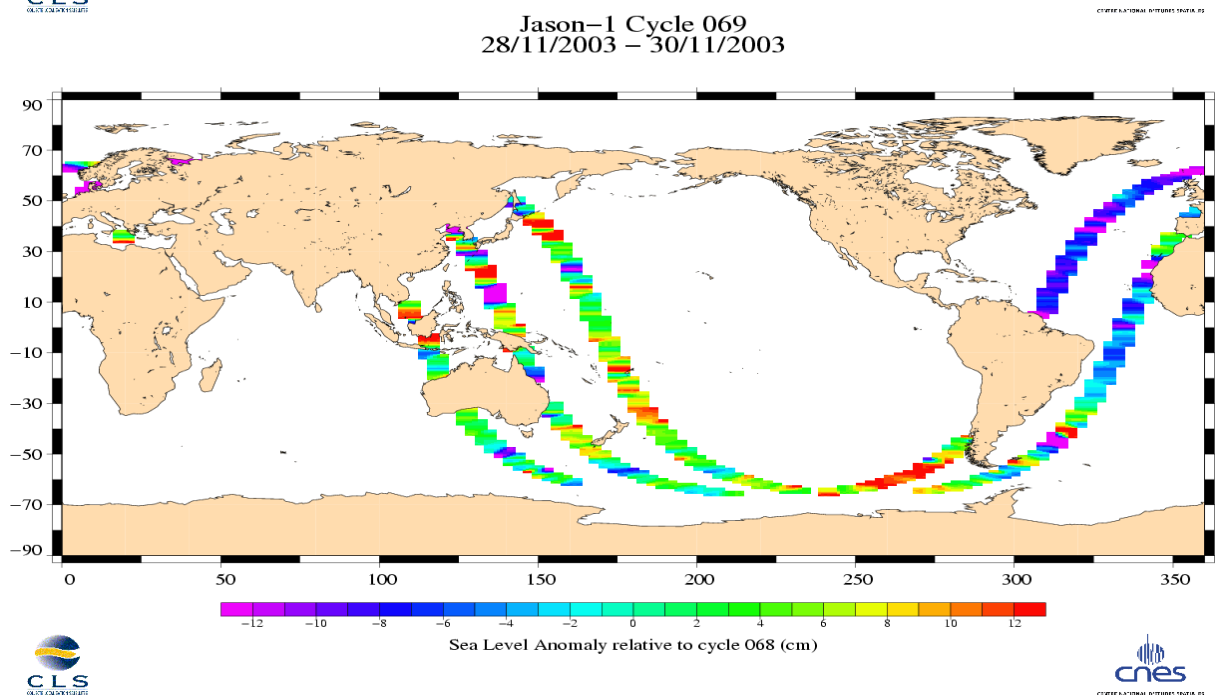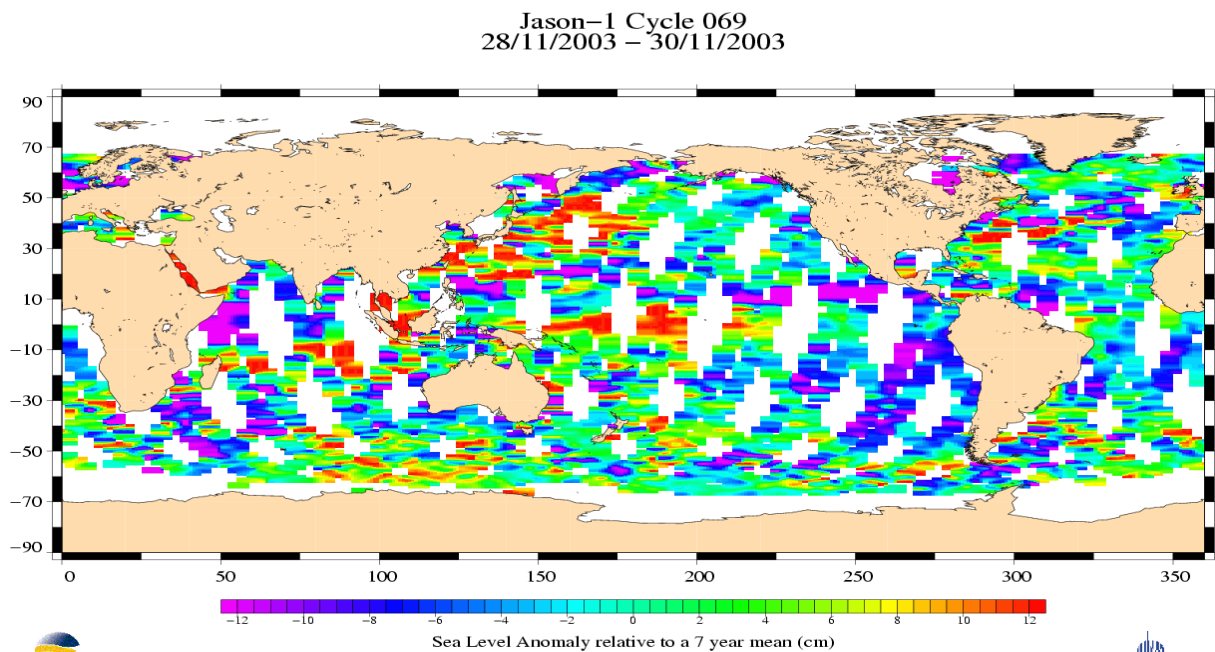


4.5.2 Comparison to a Mean Sea Surface

The two following maps respectively show the map of Jason-1 SLA relative to the MSS and differences higher than a 30 cm threshold (after centering the data). The latter figure shows that apart from isolated measurements that should be removed after refining the editing thresholds, higher differences are located in high ocean variability areas, as expected.

Jason-1 Cycle 069
28/11/2003 – 30/11/2003

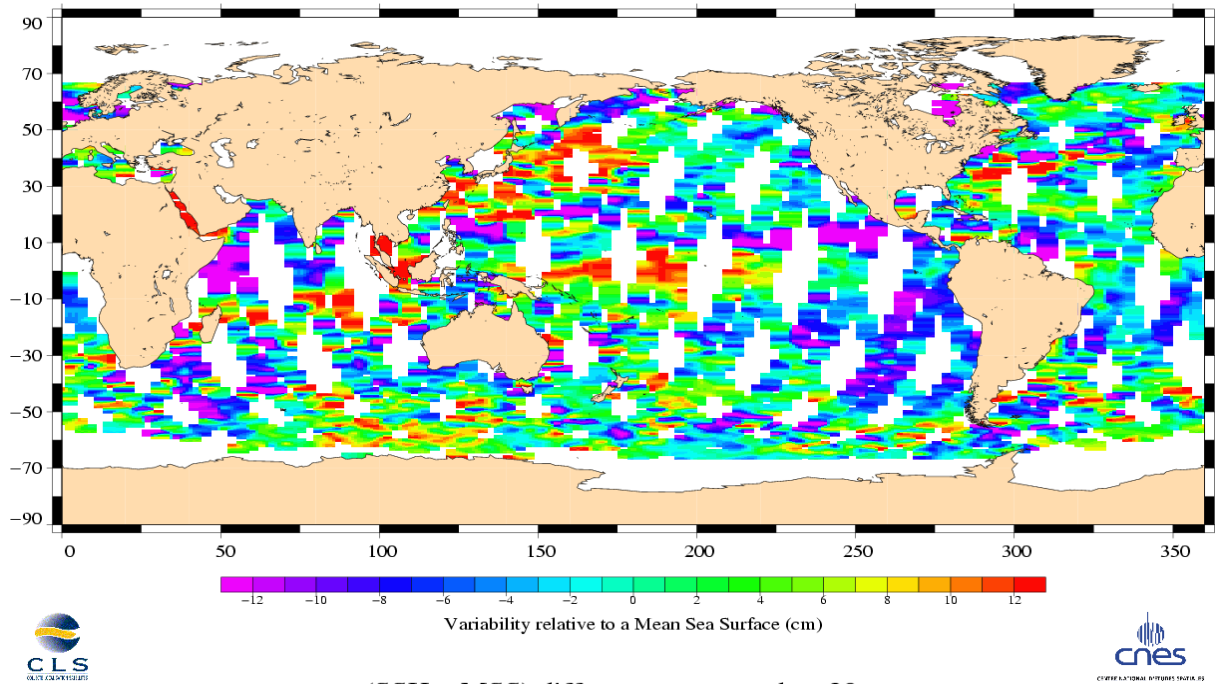


(SSH – MSS) differences greater than 30 cm
Jason / Cycle 069

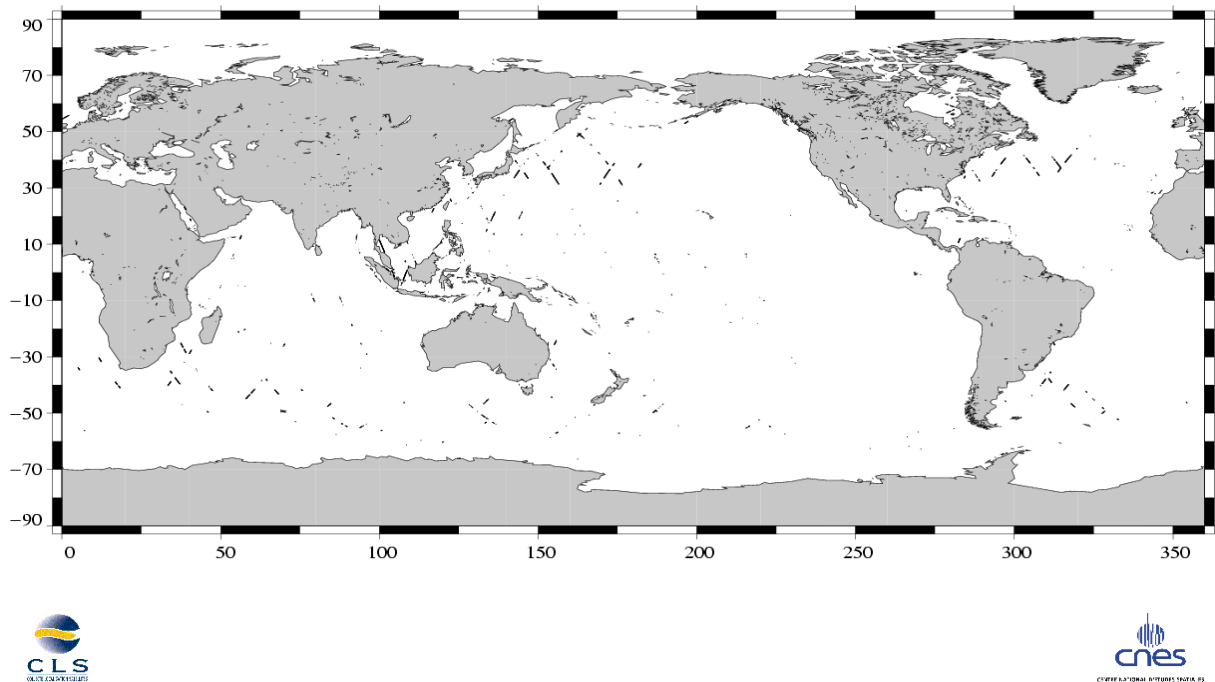


4.6 Wind and wave maps

These two figures show wind and wave estimations derived from 10 days of altimeter measurements.

Jason-1 Cycle 069
28/11/2003 – 30/11/2003

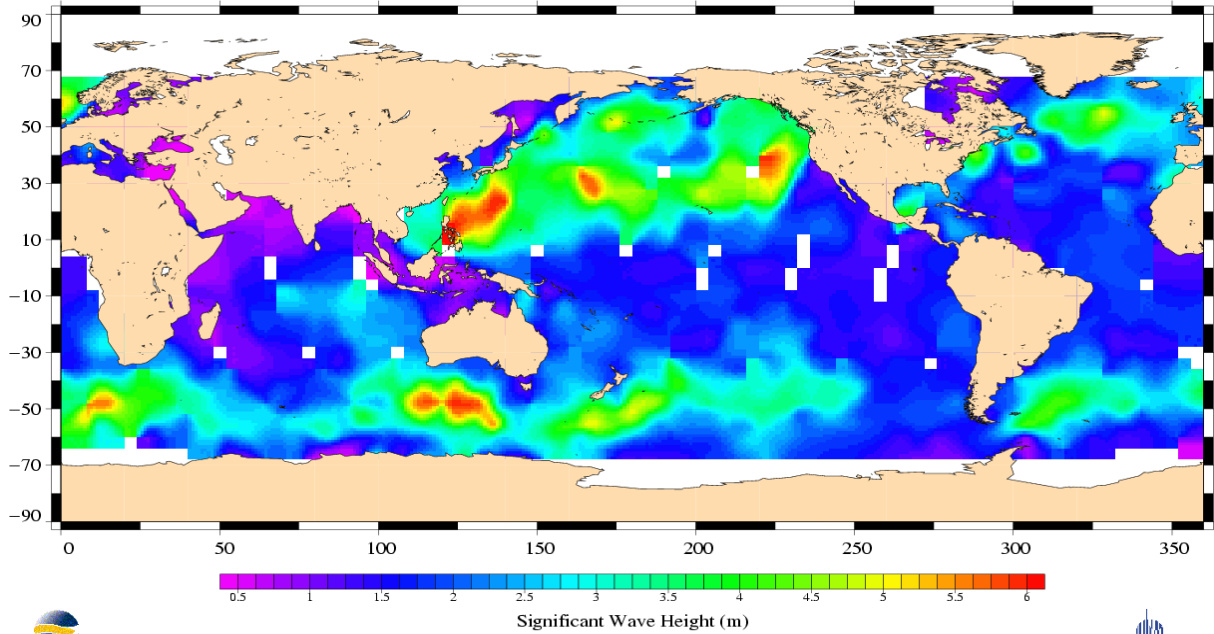

Jason-1 Cycle 069
28/11/2003 – 30/11/2003

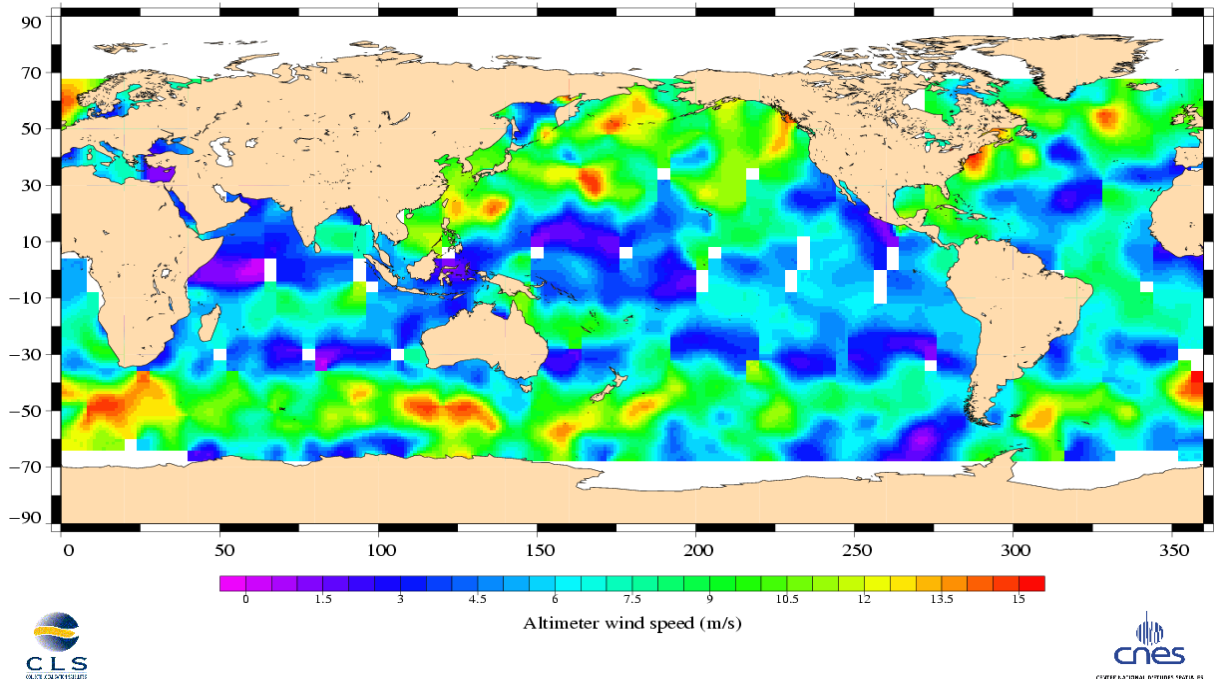

5 Jason-1 long term performance monitoring


Statistics of SSH variability are computed after crossover and repeat-track analyses. This allows to estimate how Jason-1 data fulfill the mission objectives in terms of performances.

5.1 Crossover standard deviation

This parameter is plotted as a function of time in a one cycle per cycle basis in the figure below. It is computed after data editing with two different selections:

- selecting crossover differences lower than 30 cm to avoid contamination by remaining spurious data.
- Removing shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50|$ deg.) to avoid ice coverage effects.


Crossover standard deviation

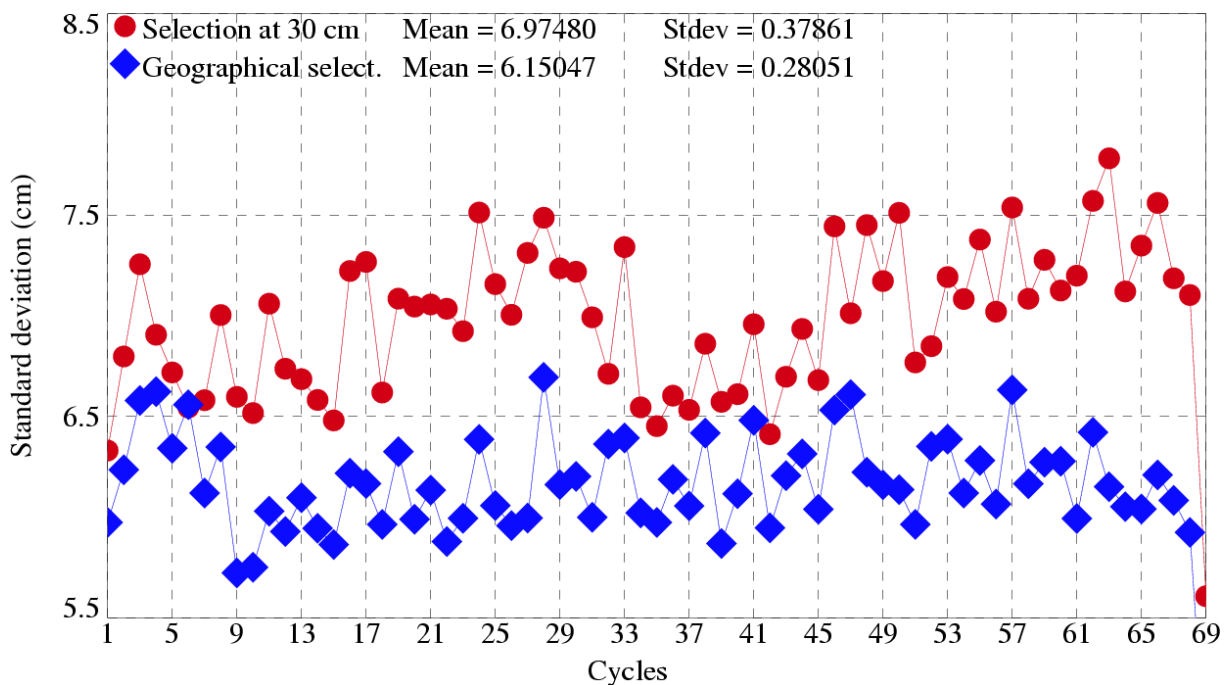

5.2 RMS of Sea Level Anomaly

Sea Level Anomalies relative to a mean profile are computed using repeat-track analysis for each Jason-1 cycle. To monitor Jason-1 performances and ocean signals, the cycle per cycle standard deviation of the SLA is plotted as a function of time.

Standard deviation of Sea Level Anomalies

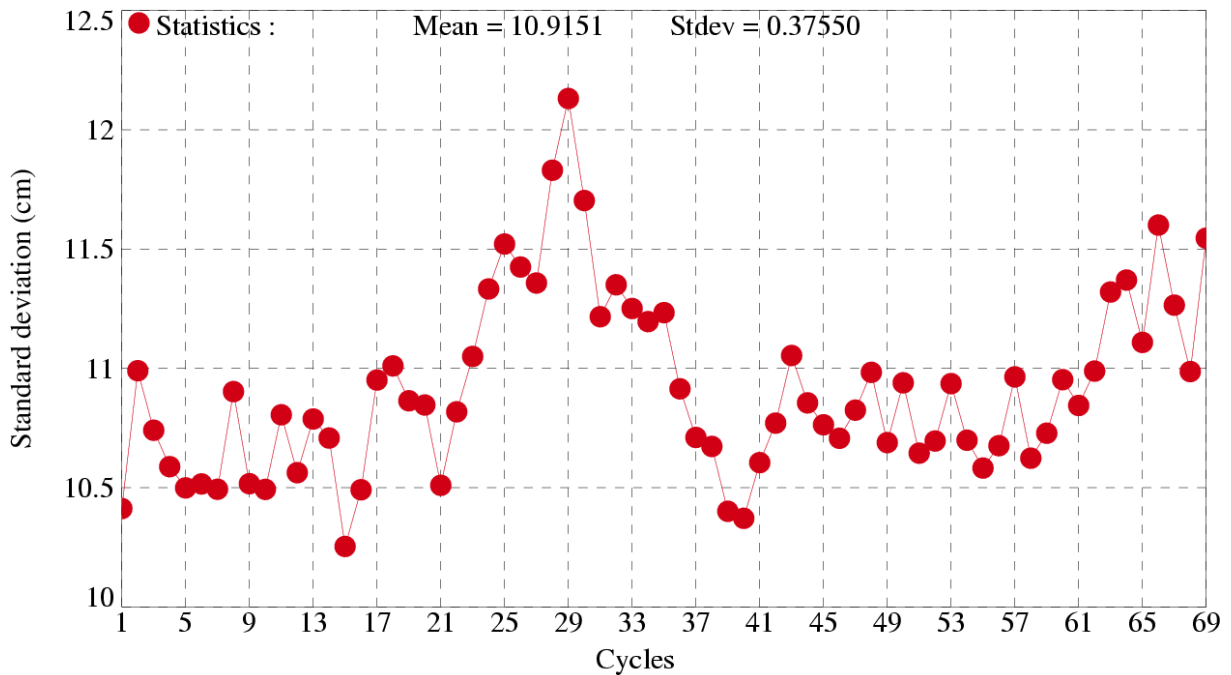

6 Particular investigations

6.1 TP and Jason-1 comparisons

In order to compare TOPEX and Jason-1 SSH estimations, TOPEX data from M-GDRs have been updated so that all the geophysical corrections are the same as Jason-1. The TOPEX-B non-parametric sea state bias has been applied. This bias has been computed with the same method as TOPEX-A non-parametric sea state bias (Gaspar et al., 2002 [3]).

Note that cycle 1 for Jason-1 corresponds with cycle 344 for TOPEX.


6.1.1 Performance comparisons

10-day crossovers are computed on a 1 cycle basis for both TOPEX and Jason-1. In order to estimate the system performances, crossovers are selected according to several criteria: shallow waters (1000m), areas of high ocean variability (> 20 cm), and high latitudes ($> |50|$ deg.) are excluded.

Futhermore, because of tape recorder problems, TOPEX measurements are missing over large geographical areas. These areas are then excluded from the selection for the two satellites.

The long term statistics are reported below. The slightly higher standard deviation for Jason-1 might be explained by residual orbit errors and larger high frequency content due to different altimeter processing.


Crossover standard deviation

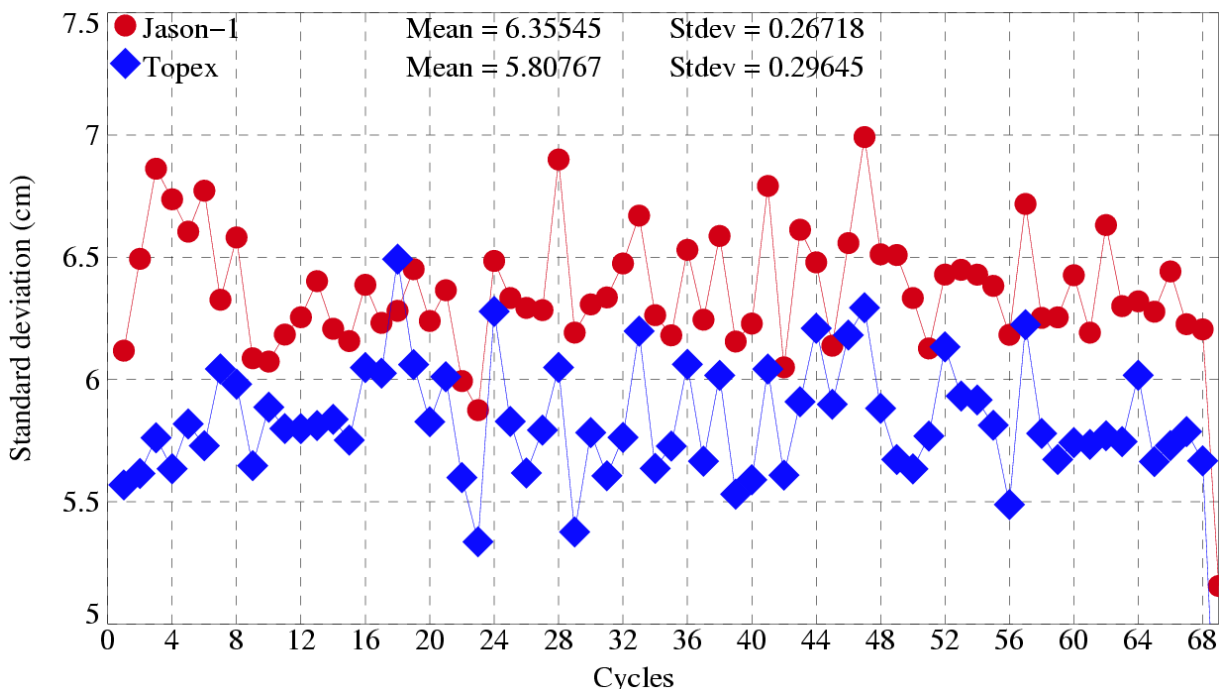

Sea Level Anomaly (SLA) statistics are computed from repeat-track analysis. The plot below gives the SLA standard deviation for each cycle over the whole data set (shallow waters are excluded).

It is not possible to compute the TOPEX SLA through Jason-1 cycles 22-25 (corresponding with TOPEX cycles 365-368) because T/P is not on a repeat cycle orbit. During this period the satellite is moved to the Tandem Mission orbit on the new ground track spacing to the West of Jason-1.


Standard deviation of SLA Residuals

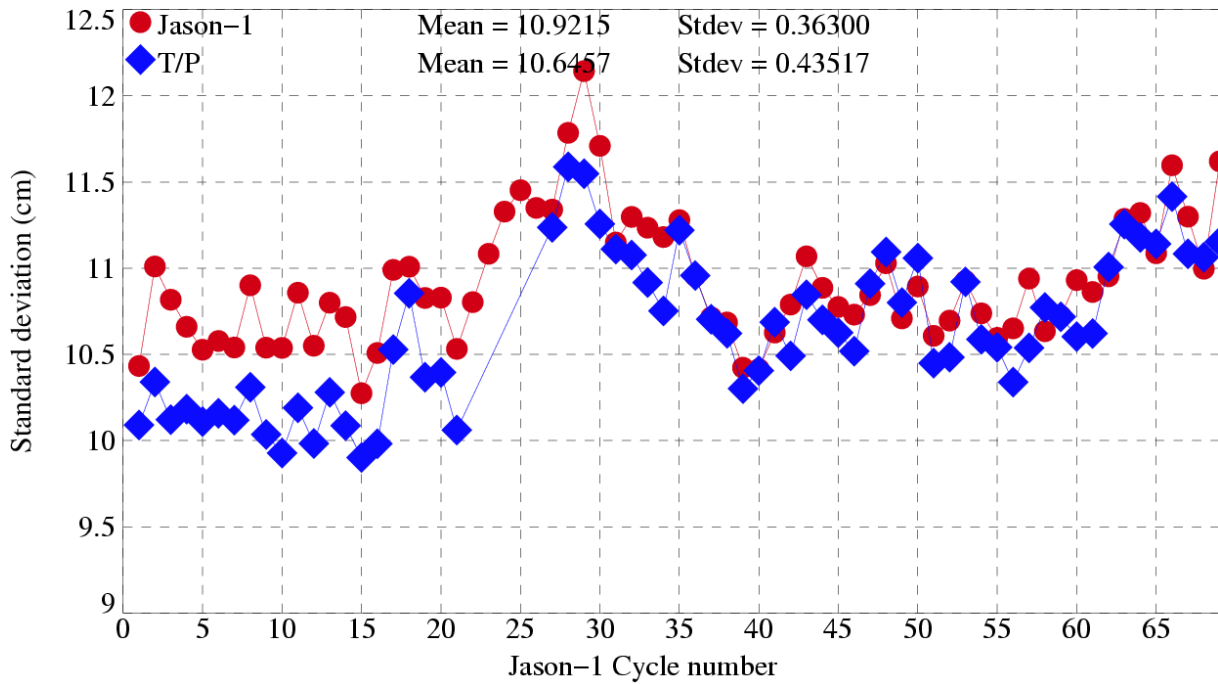


6.1.2 TP – Jason-1 crossovers

The two following figures show the mean and the standard deviation of (TP – Jason-1) 10-day SSH crossovers. The statistics are computed removing shallow waters (1000 m).

Crossover mean

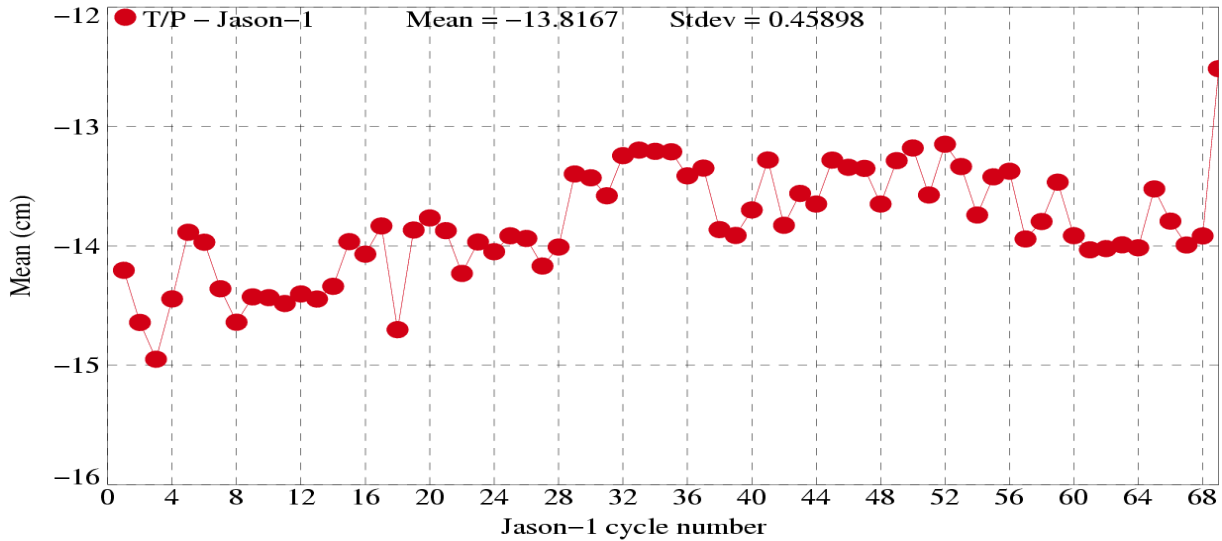

Crossover standard deviation

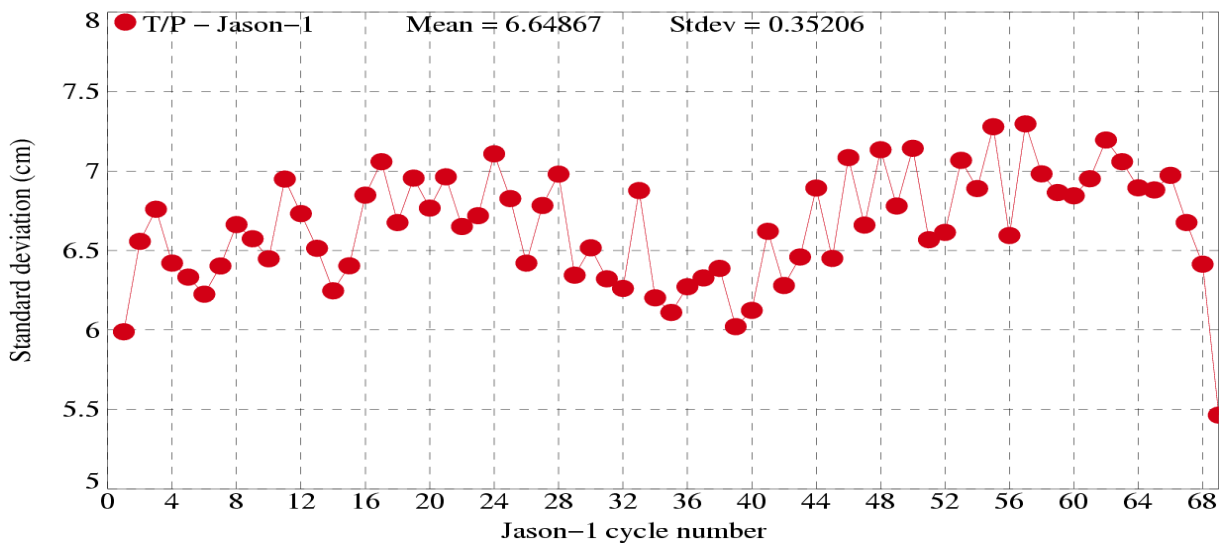


6.1.3 TP and Jason-1 Radiometer wet troposphere correction comparisons

The mean of (Radiometer - ECMWF) wet troposphere corrections are computed cycle by cycle for T/P and Jason-1. The long term monitoring is plotted below. The particular values obtained for Jason-1 cycle 1 and TP cycle 344 are explained by the change in the ECMWF model in January 2002.

The different yaw steering modes are evidenced by jumps in the TP curve and in the Jason-1 curve after cycle 46. After cycle 30, departures between the JMR and the model estimations are observed. Note that the TMR wet tropospheric correction has been corrected for the drift (Ruf C.S., 2002 [4]).

(Radiometer – ECMWF) wet tropo correction

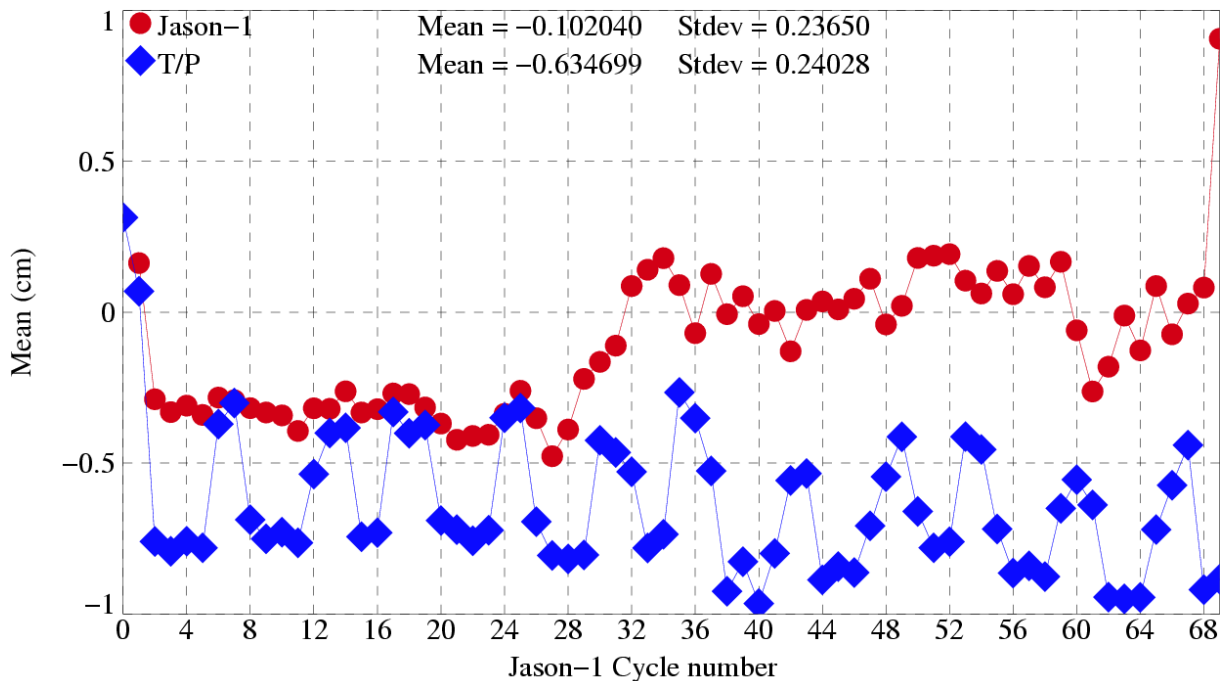

6.2 Square of the mispointing angle

As a result of safe hold mode incident, off nadir angles values are higher than usual (0.2 degree) from pass 212 to 241. This has no impact on scientific applications.

7 General warnings

7.1 Altimeter wind speed default values : minor warning

The altimeter wind speed algorithm was adjusted on TOPEX data before the Jason-1 launch. It gives very few negative values which are set to default values in the GDR. The user may note that a valid SSB value is present in the product when altimeter wind speed values are set to default : this is because negative wind values enter the SSB algorithm; such a feature remain to be corrected to clean up the wind algorithm. It is also clear that the wind algorithm should be better tuned to Jason-1 data in the near future.

References

- [1] Vincent,P., Desai S.D., Picot N. & Case K., April 8, 2003 : The first generation of IGDRs and GDRs products to be made available after completion of the Jason-1 verification phase. *Memo to Jason-1 PIs and CoIs.*
- [2] Aviso and PODAAC User Handbook, April 2003 : IGDR and GDR Jason User Products, *SMM-MU-M5-OP-13184-CN.*
- [3] Gaspar, P., S. Labroue & F. Ogor, October 2002: Improving nonparametric estimates of the sea state bias in radar altimeter measurements of sea level *J. Atmos. Oceanic Technol.*, **19**, 1690-1707.
- [4] Ruf C.S., June 2002 : TMR Drift - Correction to 18 GHz Brightness Temperatures, Revisited. *Report to TOPEX Project.*