

TOPEX/Poseidon MGDR Quality Assessment Report

Cycle 382

27-01-2003 05-02-2003

Prepared by :	C. Schgounn, CLS	
	G. Pontonnier, CLS	
	M. Ablain, CLS	
Accepted by :	J. Dorandeu, CLS	
Quality visa :	M. Destouesse, CLS	
Approved by :	N. Picot, CNES	







SALP-RP-P2-EX-21120-CLS382 Edition 01.0, June 2003

1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the Topex/Poseidon mission. The document is associated with data dissemination on a cycle by cycle basis.

The objectives of this document are :

To provide a data quality assessment To provide users with necessary information for data processing

To report any change likely to impact data quality at any level, from instrument status to software configuration

To present the major useful results for the current cycle

It is divided into the following topics:

Cycle overview CALVAL main results

2 Cycle overview

2.1 Cycle quality and performances

Data quality for this cycle appears to be nominal. For this cycle, the crossover standard deviation is 5.76 cm rms, and the standard deviation of Sea Level Anomalies (SLA) relative to a Mean Sea Surface is 9.10 cm.


2.2 Warnings and recommendations

- Tape recorder failures :
- There are a lot of data gaps due to tape recorder anomalies, especially in the Indian Ocean.
- Editing measurements (a) :

Problems in the interpolation of the TMR parameters occur when there are missing measurements (tape recorder failures). As a result 4.77% of the measurements are removed by the TMR correction criterion.

• Editing measurements (b) :

A new criterion has been added to the editing procedure since cycle 376 (See Editing). The mesurements removed by this criterion for the current cycle are plotted on the following figure.

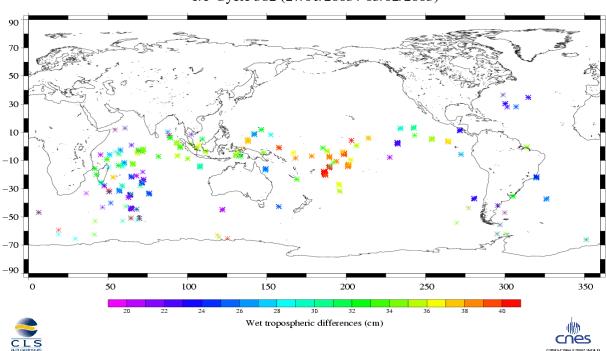

Edited parameter : Radiometer and ECMWF wet tropospheric differences T/P Cycle 382 (27/01/2003 / 05/02/2003)

3 CALVAL main results


This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

3.1 Missing measurements


711148 altimeter measurements are present, and 83348 are missing.

The map below shows all the available measurements for this cycle and illustrates the tape recorder problems. The latter figure shows missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

Available measurements

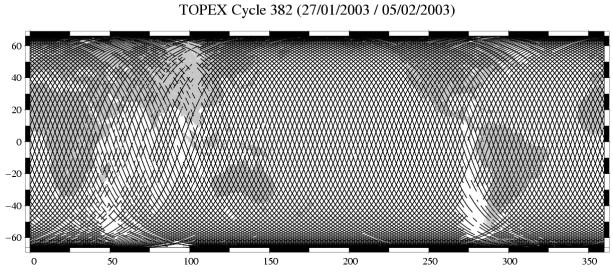

Missing measurements TOPEX/Poseidon Cycle 382 (27/01/2003 / 05/02/2003)

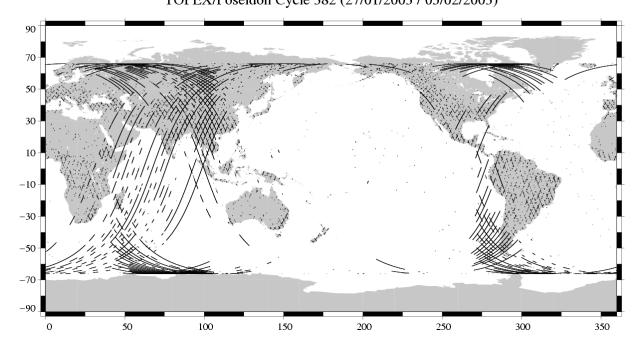


TOPEX/Poseidon GDR Quality Assessment Report **Cycle 382** 27-01-2003 05-02-2003 SALP-RP-P2-EX-21072-CLS382

3.2 M-GDR quality flags


The following table indicates the percentage of measurements for which those flags are set.


Name	Descrition	% bad
Geo_Bad_1	altimeter land flag	27.02
Geo_Bad_1	ice flag	3.17
Geo_Bad_1	radiometer land flag	28.22
Alt_Bad_1	conditions 1 altimeter	4.05
Alt_Bad_2	conditions 2 altimeter	3.95
Geo_Bad_2	rain (liquid water in excess)	6.18
Geo_Bad_2	less than 4 points for CSR3.0 tide calculation	0.33
Geo_Bad_2	less than 4 points for FES95.2.1 tide calculation	2.39
TOPEX	TOPEX not valid	0.00
TMR	TMR not valid	0.00
TMR_Bad	Brightness temperatures not valid	5.00
DORIS	DORIS not valid	0.00


3.3 M-GDR parameter plots

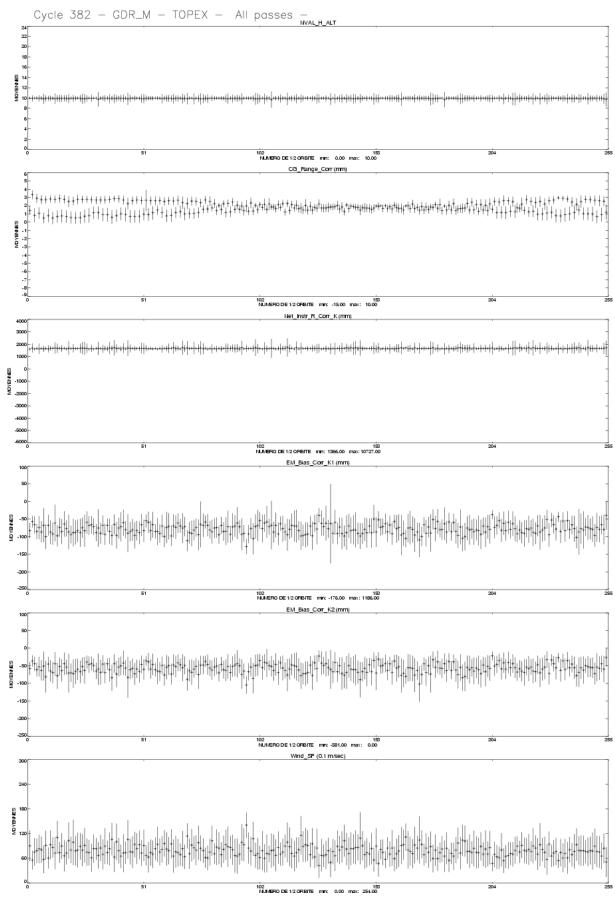


TOPEX/Poseidon GDR Quality Assessment Report **Cycle 382** 27-01-2003 05-02-2003 SALP-RP-P2-EX-21072-CLS382 Page 5

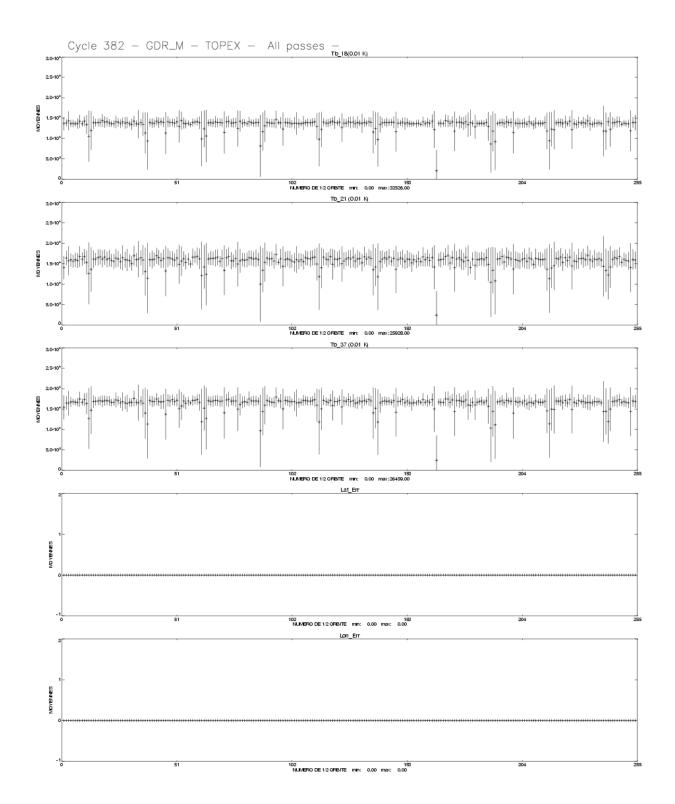


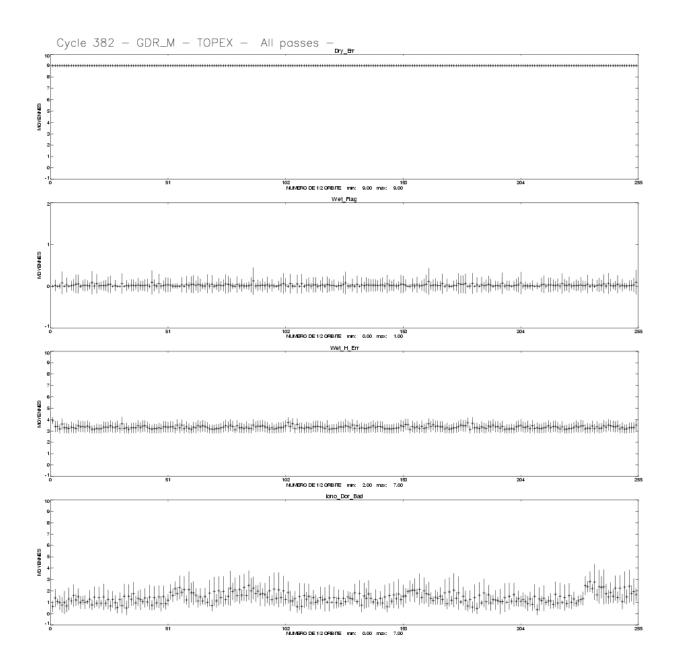

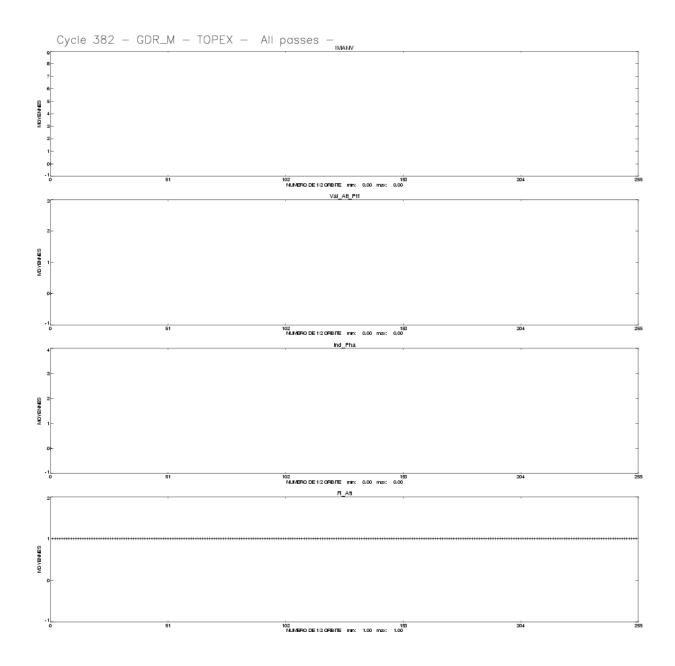




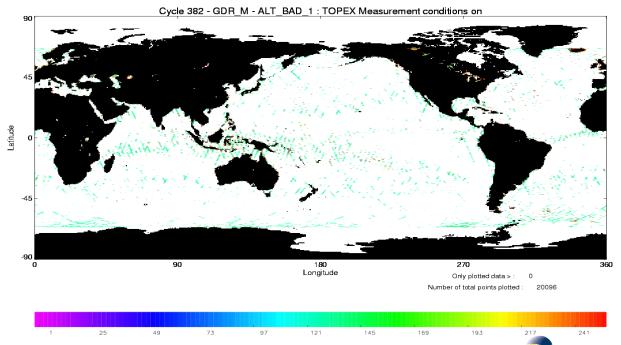


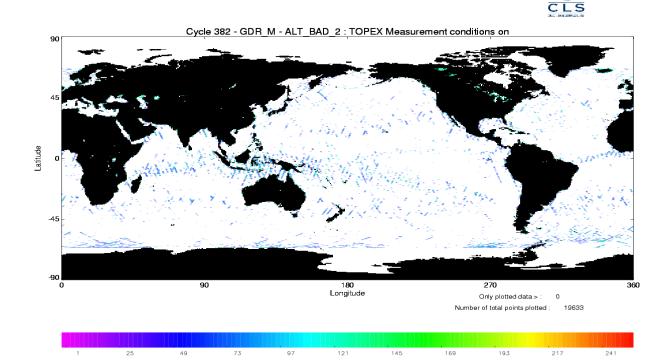



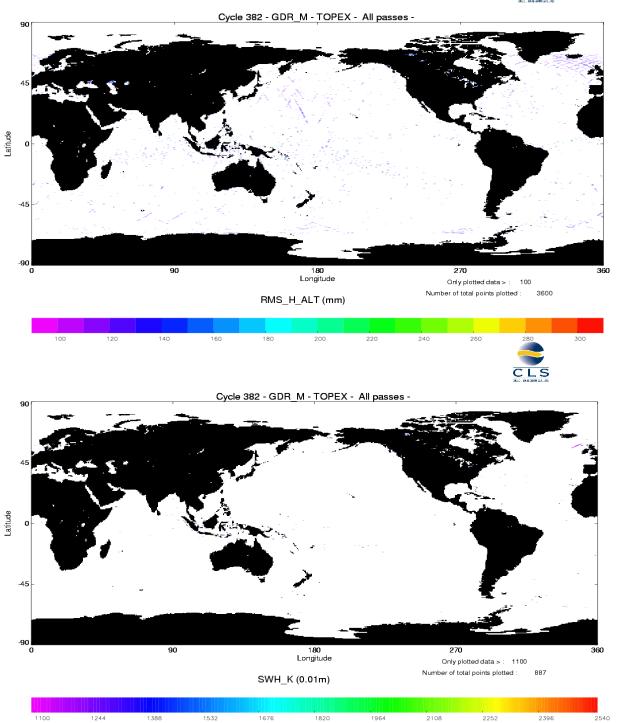



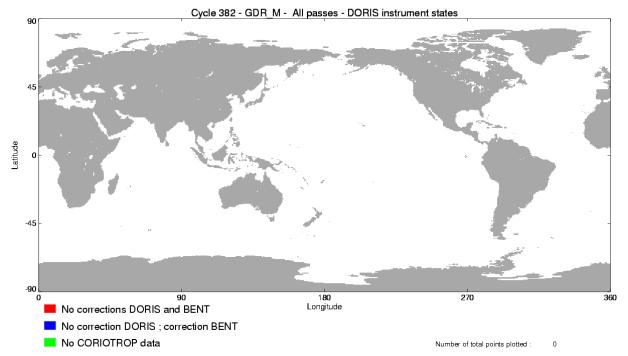

3.4 Editing


The following table gives for each tested parameter, minimum and maximum thresholds, the number and the percentage of points removed.

As a comparison, the mean percentage over one year (1997) is also given.

There are problems in the interpolation of the TMR parameters since cycle 371 when there are missing measurements (tape recorder failures). These bad measurements are removed by the TMR correction criterion but some of them have been kept. Thus a new criterion has been added in the editing procedure since cycle 376 to remove all measurements for which the difference between the TMR and the ECMWF wet tropospheric corrections is greater than 20 cm.

Parameters	Min Thres.	Max Thres.	Unit	Mean % removed in	% removed
	122.000	100.000		1997	1.00
Sea surface height	-130.000	100.000	m	1.37	1.02
Number of 20/10Hz valid points Po-	5.000	-		1.37	1.23
seidon/TOPEX					
Std. deviation of range	0.000	0.100	m	1.85	1.84
Off nadir angle from waveform	0.000	0.400	deg	1.36	4.27
Dry tropospheric correction	-2.500	-1.900	m	0.00	0.00
Invert barometer correction	-2.000	2.000	m	0.00	0.00
TMR wet tropospheric correction	-0.500	-0.001	m	0.34	4.77
Ionospheric correction (Posei-	-0.400	0.040	m	0.00	0.00
don:Doris, TOPEX:Dual)					
Significant wave height	0.000	11.000	m	1.46	0.48
Sea state Bias	-0.500	0.000	m	1.39	0.84
Backscatter coefficient	7.000	30.000	dB	1.44	0.78
Ocean tide height	-5.000	5.000	m	0.01	1.21
Earth tide	-1.000	1.000	m	0.00	0.00
Pole tide	-15.000	15.000	m	0.00	0.00
TMR and ECMWF tropospheric	-0.200	0.200	m	NaN	1.25
differences					
Spline fitting					0.01


The following three maps are complementary: they show respectively the removed, the selected measurements and the percentage of selected measurements in the editing procedure.

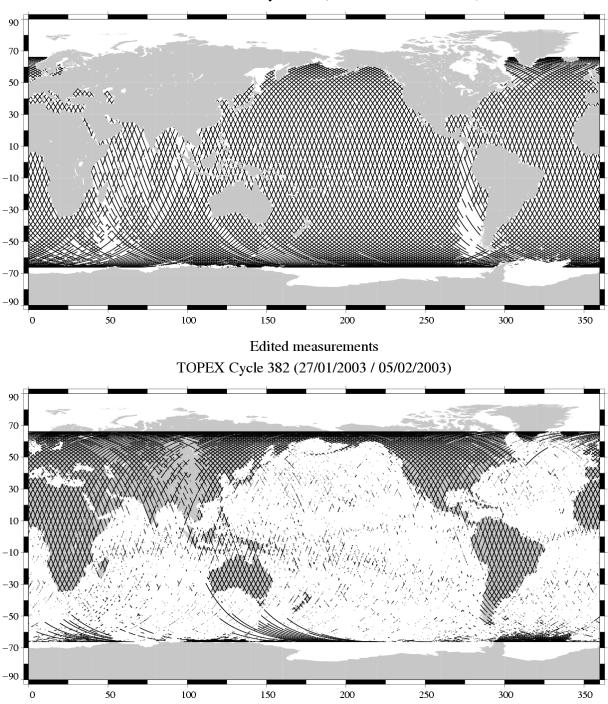

Valid data TOPEX/Poseidon Cycle 382 (27/01/2003 / 05/02/2003)


TOPEX/Poseidon GDR Quality Assessment Report **Cycle 382** 27-01-2003 05-02-2003 SALP-RP-P2-EX-21072-CLS382


Page 13

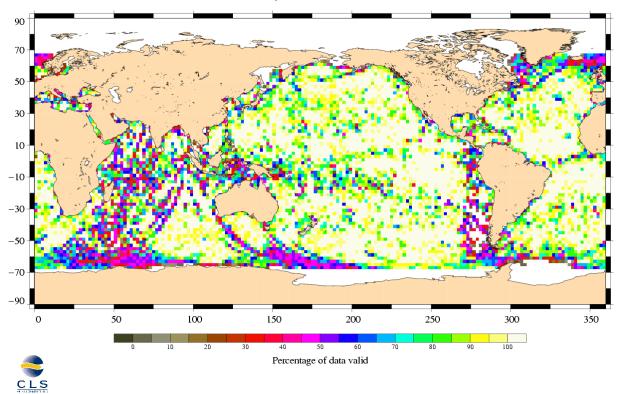



Percentage of valid data relative to the nominal pass TOPEX/Poseidon Cycle 382 (27/01/2003 / 05/02/2003)


3.5 Ionospheric correction

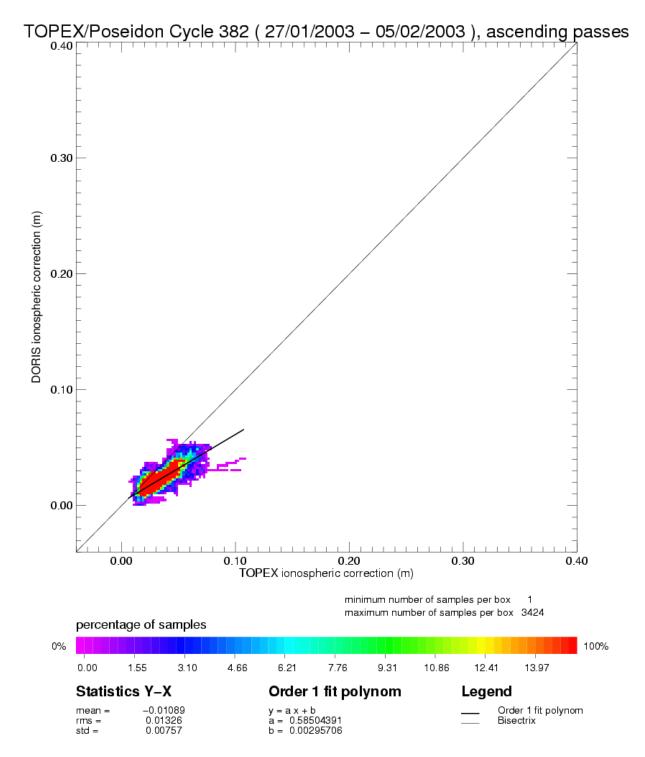


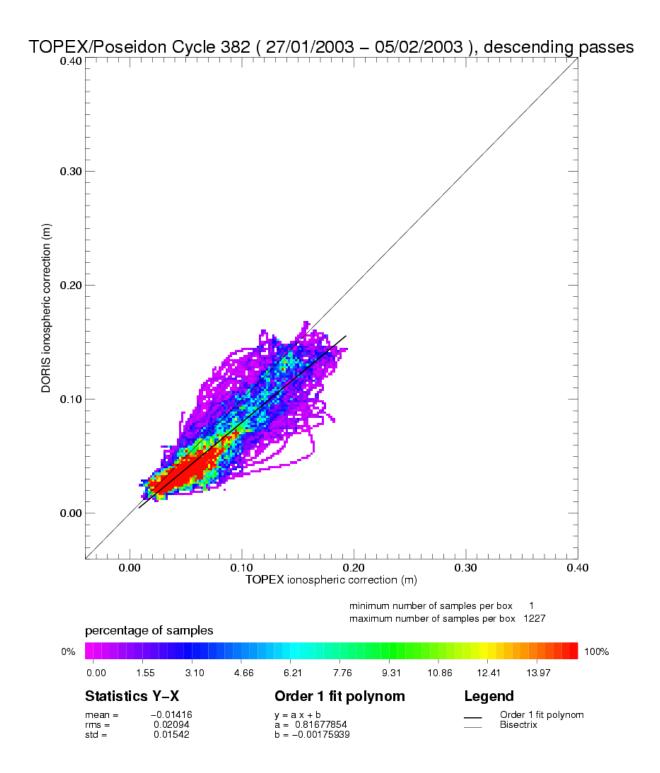


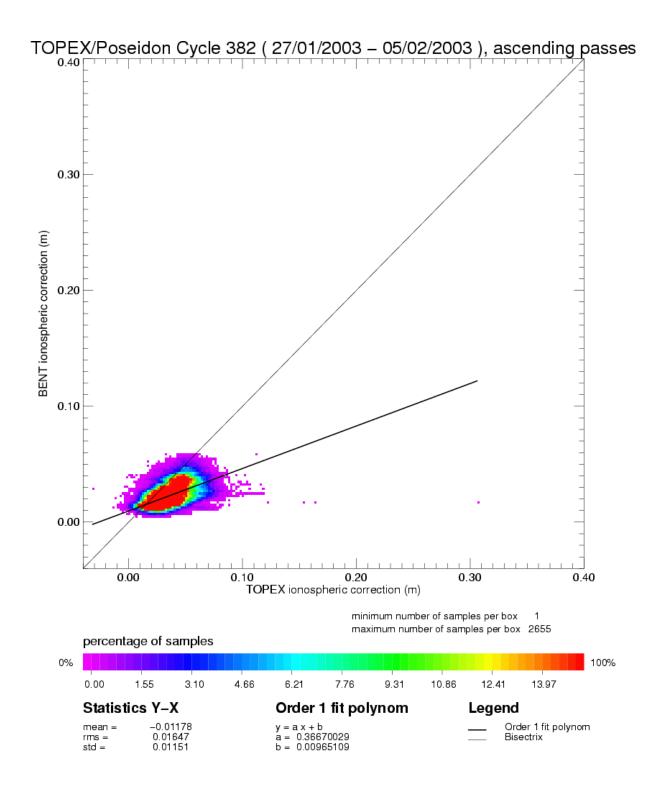

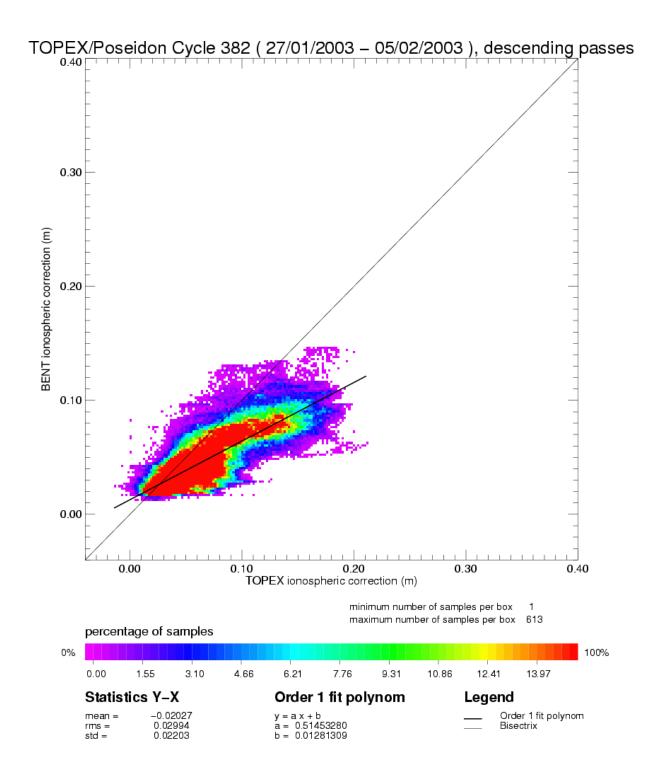


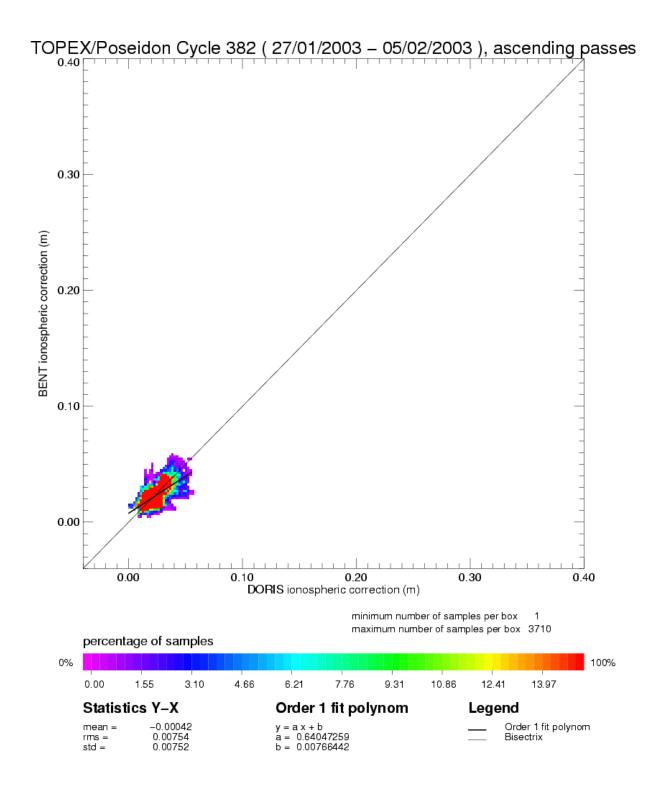


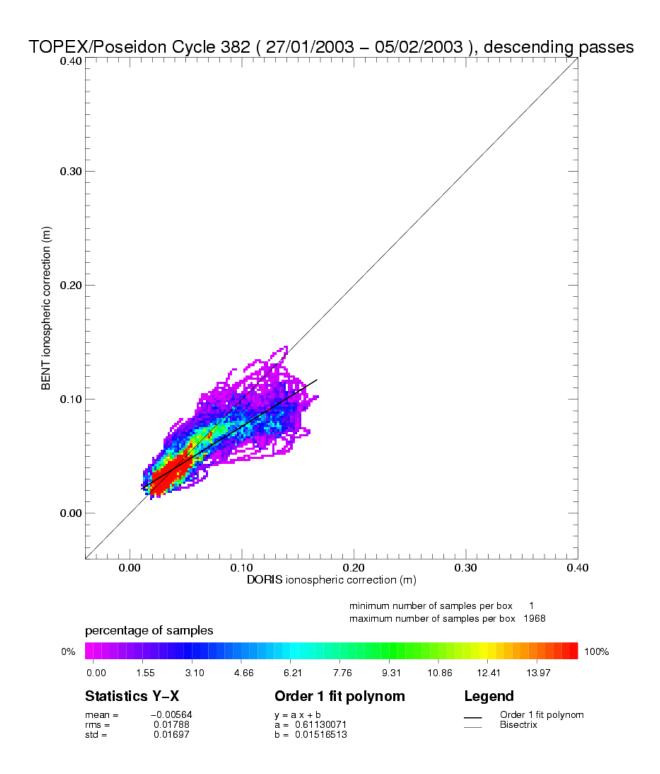


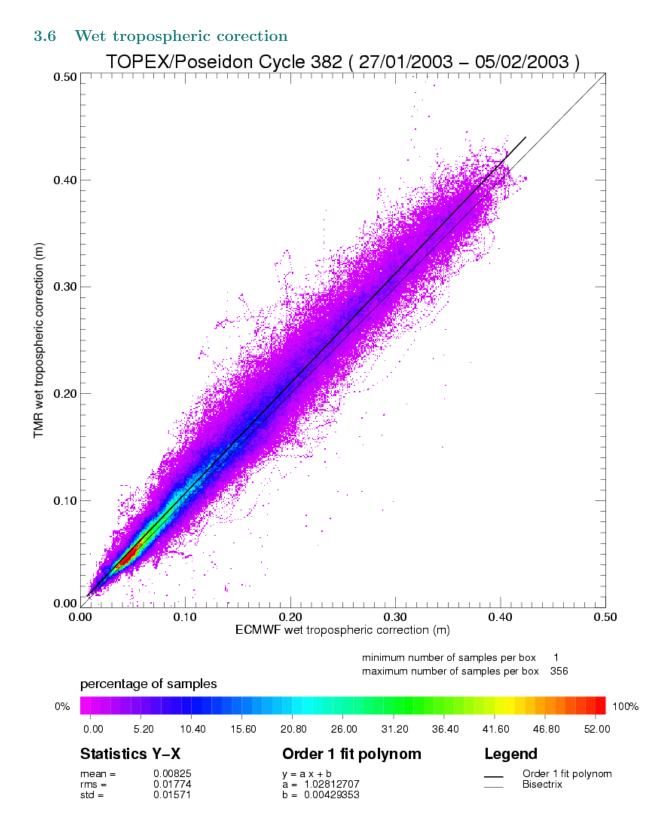


3.7 Crossover statistics

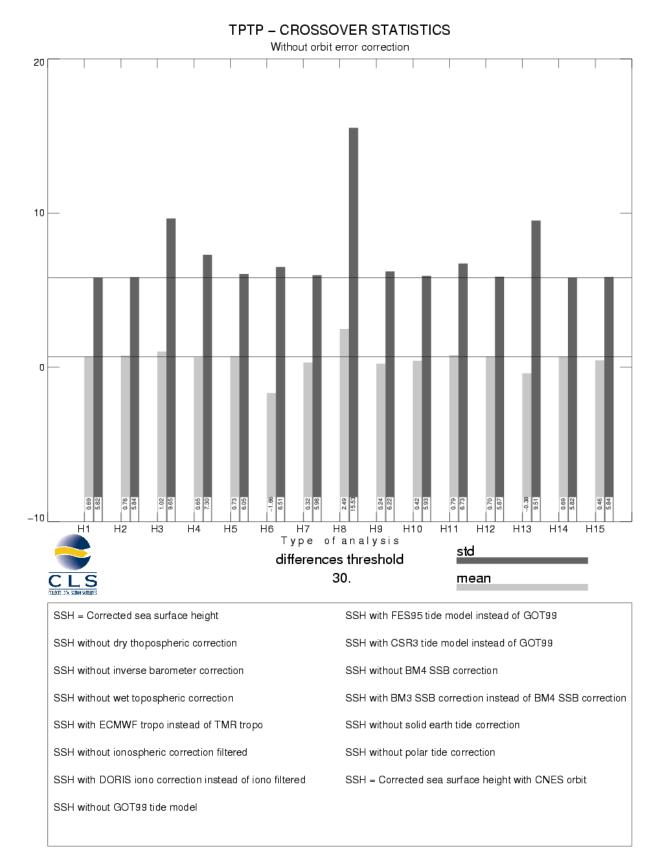

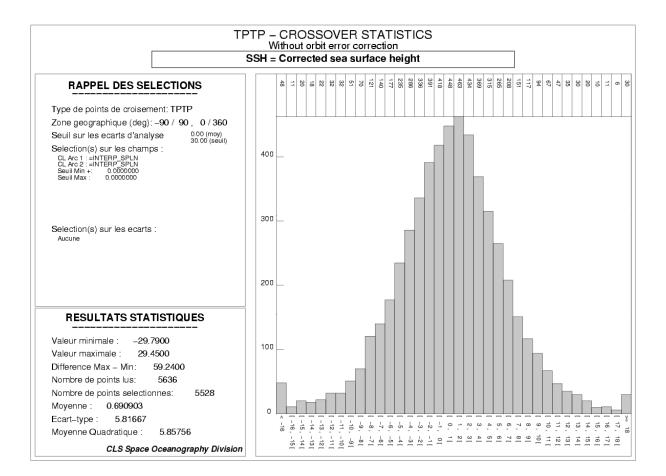


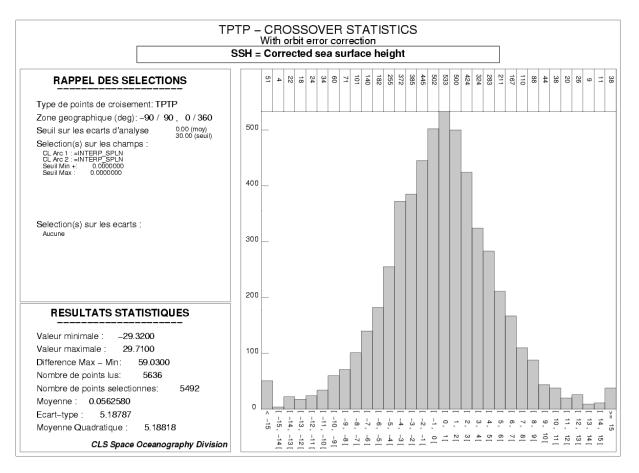


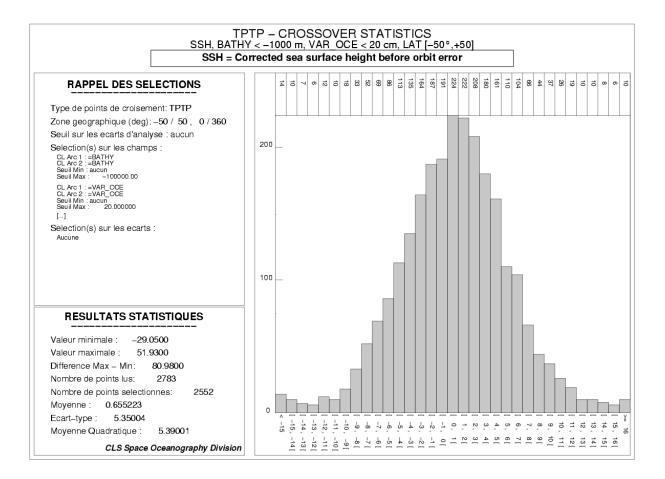


3.8 SSH variability

3.8.1 Sea Level Anomaly




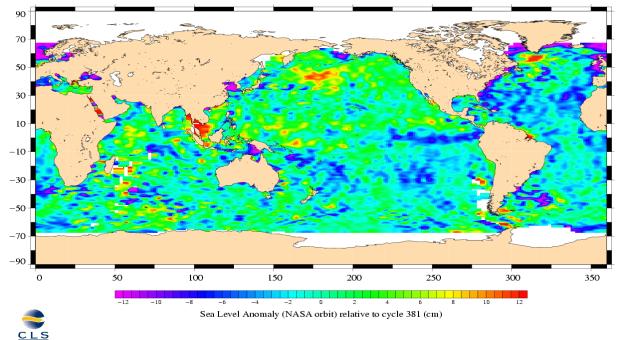

TOPEX/Poseidon, cycle 382 Period : 27/01/2003 – 05/02/2003

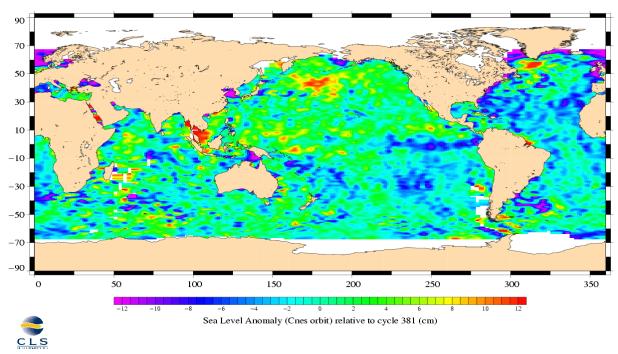


TOPEX/Poseidon, cycle 382 Period : 27/01/2003 – 05/02/2003

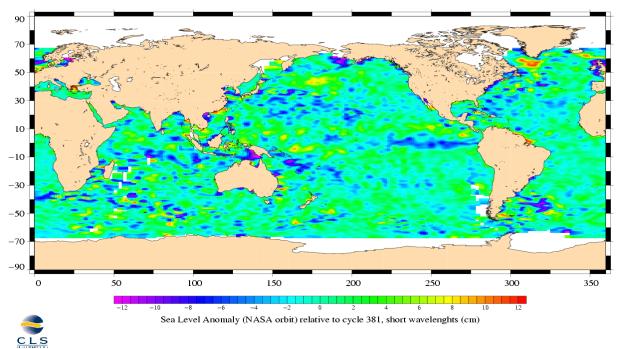

3.8.2 Comparison to a precise Mean Sea Surface


The CLS (2001) MSS model is used as a reference to compute SLA. The two following maps respectively show the map of Topex SLA relative to the MSS and differences higher than a 30 cm threshold (after centering the data). The latter figure shows that higher differences are located in high ocean variability areas, as expected.

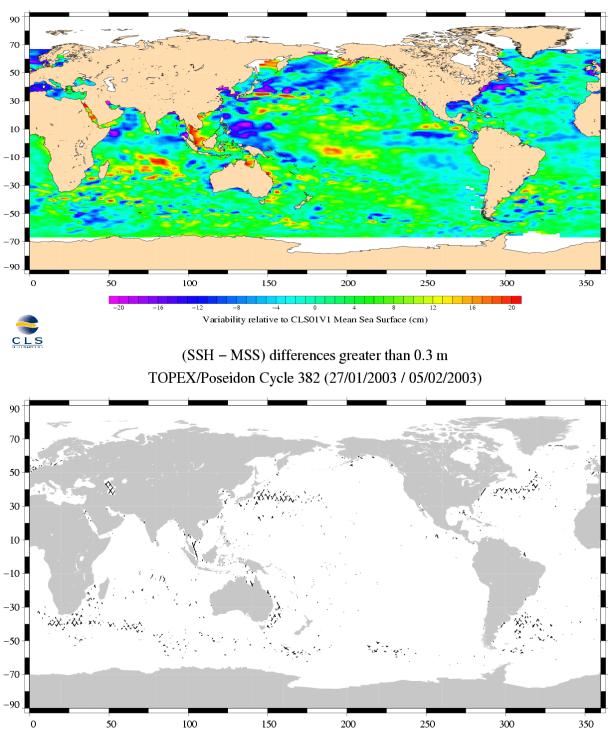

TOPEX/Poseidon, cycle 382 Period : 27/01/2003 – 05/02/2003

TOPEX/Poseidon GDR Quality Assessment Report **Cycle 382** 27-01-2003 05-02-2003 SALP-RP-P2-EX-21072-CLS382 Page 27


3.9 Dynamic topography

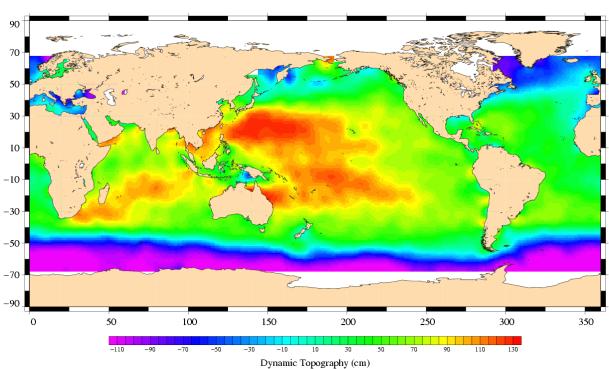

TOPEX/Poseidon, cycle 382 Period : 27/01/2003 – 05/02/2003

3.10 Wind and wave maps

These two figures show wind and wave estimations derived from 10 days of altimeter measurements.

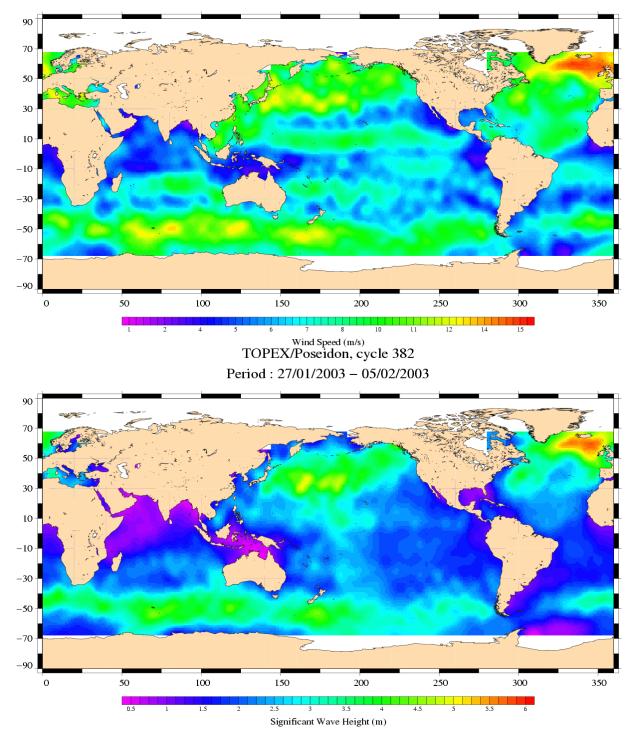

TOPEX/Poseidon, cycle 382 Period : 27/01/2003 – 05/02/2003

TOPEX/Poseidon GDR Quality Assessment Report **Cycle 382** 27-01-2003 05-02-2003 SALP-RP-P2-EX-21072-CLS382 Page 29