



TOPEX/Poseidon MGDR Quality Assessment Report

Cycle 455

19-01-2005 / 29-01-2005

Prepared by :	C. Schgounn, CLS G. Pontonnier, CLS M. Ablain, CLS	
Accepted by :	J. Dorandeu, CLS	
Quality visa :	M. Destouesse, CLS	
Approved by :	N. Picot, CNES	



CENTRE NATIONAL D'ETUDES SPATIALES



JPL
Jet Propulsion Laboratory
California Institute of Technology

SALP-RP-P2-EX-21120-CLS455

Edition 01.0, March 2005

1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the Topex/Poseidon mission. The document is associated with data dissemination on a cycle by cycle basis.

The objectives of this document are :

- To provide a data quality assessment
- To provide users with necessary information for data processing
- To report any change likely to impact data quality at any level, from instrument status to software configuration
- To present the major useful results for the current cycle

It is divided into the following topics:

- [**Cycle overview**](#)
- [**CALVAL main results**](#)

2 Cycle overview

2.1 Cycle quality and performances

Data quality for this cycle is nominal.

For this cycle, the crossover standard deviation is 6.43 cm rms. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50|$ deg.) it decreases down to 5.85 cm rms.

The standard deviation of Sea Level Anomalies (SLA) relative to a 7-year Mean Sea Surface is 10.95 cm. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes ($> |50|$ deg), it lowers to 9.58 cm .

2.2 Missing measurements

This cycle has no missing pass.

2.3 Warnings and recommendations

- Missing measurements :
 - Since October 08th all mission data recovery requirements have been met via TDRSS real time contacts.
Therefore there is a lot of data gaps, especially in the Indian Ocean, between the East and Southeast Pacific basin, in the South Pacific Ocean close to the South and Central America coasts and below the Groenland coasts.
- Doris switch off :
The DORIS instrument was switched off since the incident on 01, November 2004. All the POE requirements are now met using lasernet tracking data. Only bent ionospheric correction is available.
- Measurements edited by the TMR parameters :
The following anomalies are explained by the problems in the interpolation of the TMR parameters due to tape recorder failures :
 - 6.57% of the measurements are removed by the TMR correction criterion.
 - Some measurements have radiometer earth flag set to valid over earth. A new criterion has been added to the editing procedure to remove all these measurements (see [Editing](#)) .


3 CALVAL main results

This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

3.1 Missing measurements

626711 altimeter measurements are present, and 167916 are missing.

The map below shows all the available measurements for this cycle and illustrates the tape recorder problems. The latter figure shows missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

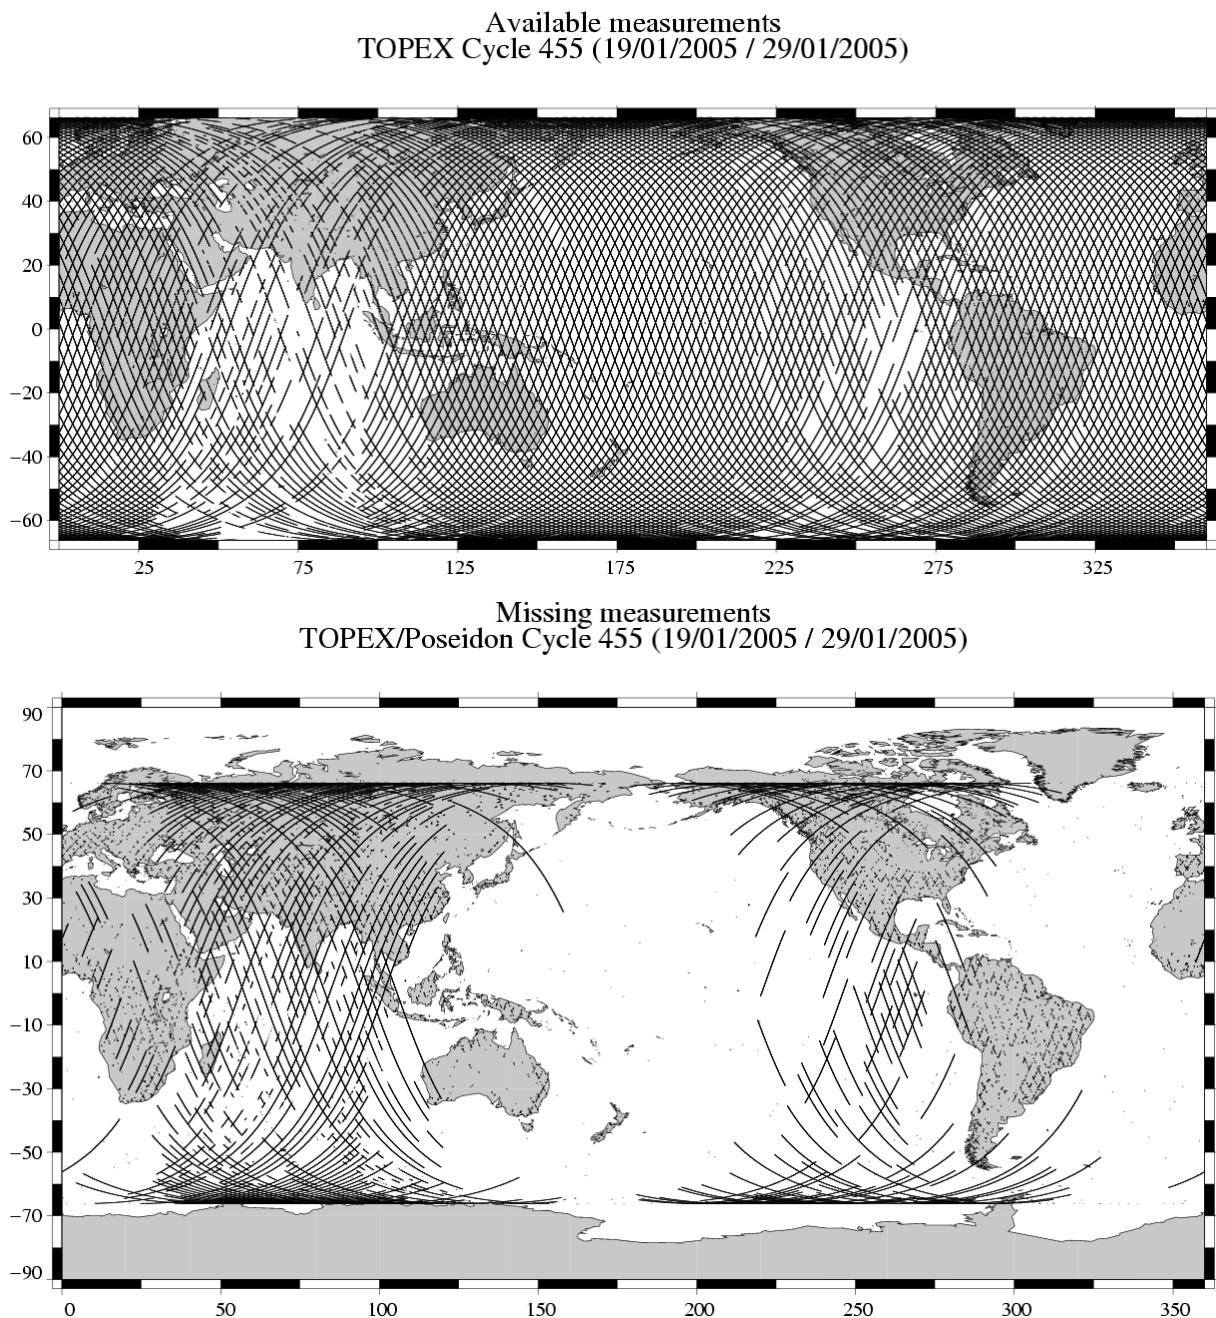



3.2 M-GDR quality flags

The following table indicates the percentage of measurements for which those flags are set.


Name	Description	% bad
Geo_Bad_1	altimeter land flag	25.59
Geo_Bad_1	ice flag	2.79
Geo_Bad_1	radiometer land flag	26.52
Alt_Bad_1	conditions 1 altimeter	4.20
Alt_Bad_2	conditions 2 altimeter	4.08
Geo_Bad_2	rain (liquid water in excess)	10.03
Geo_Bad_2	less than 4 points for CSR3.0 tide calculation	0.34
Geo_Bad_2	less than 4 points for FES95.2.1 tide calculation	2.43
TOPEX	TOPEX not valid	0.00
TMR	TMR not valid	0.00
TMR_Bad	Brightness temperatures not valid	10.78
DORIS	DORIS not valid	0.00

3.3 M-GDR parameter plots

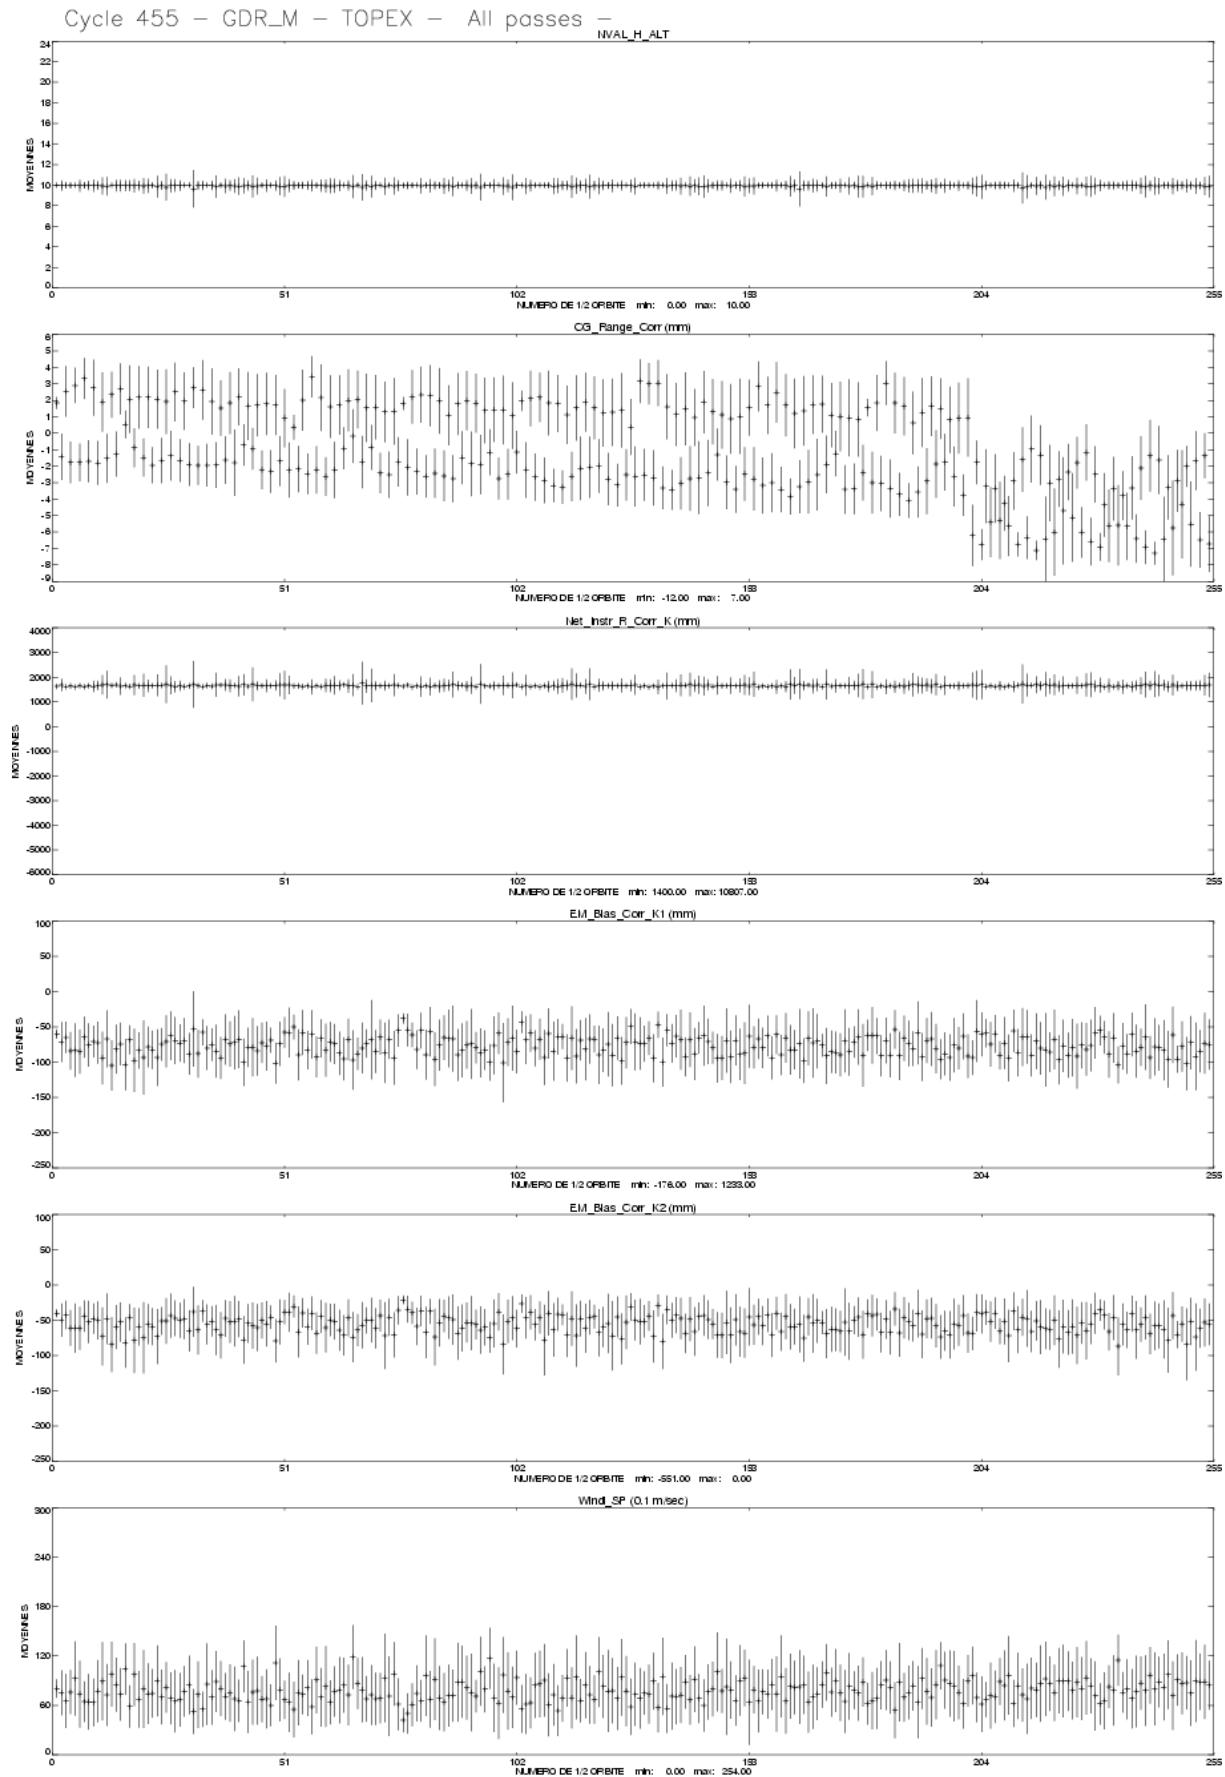



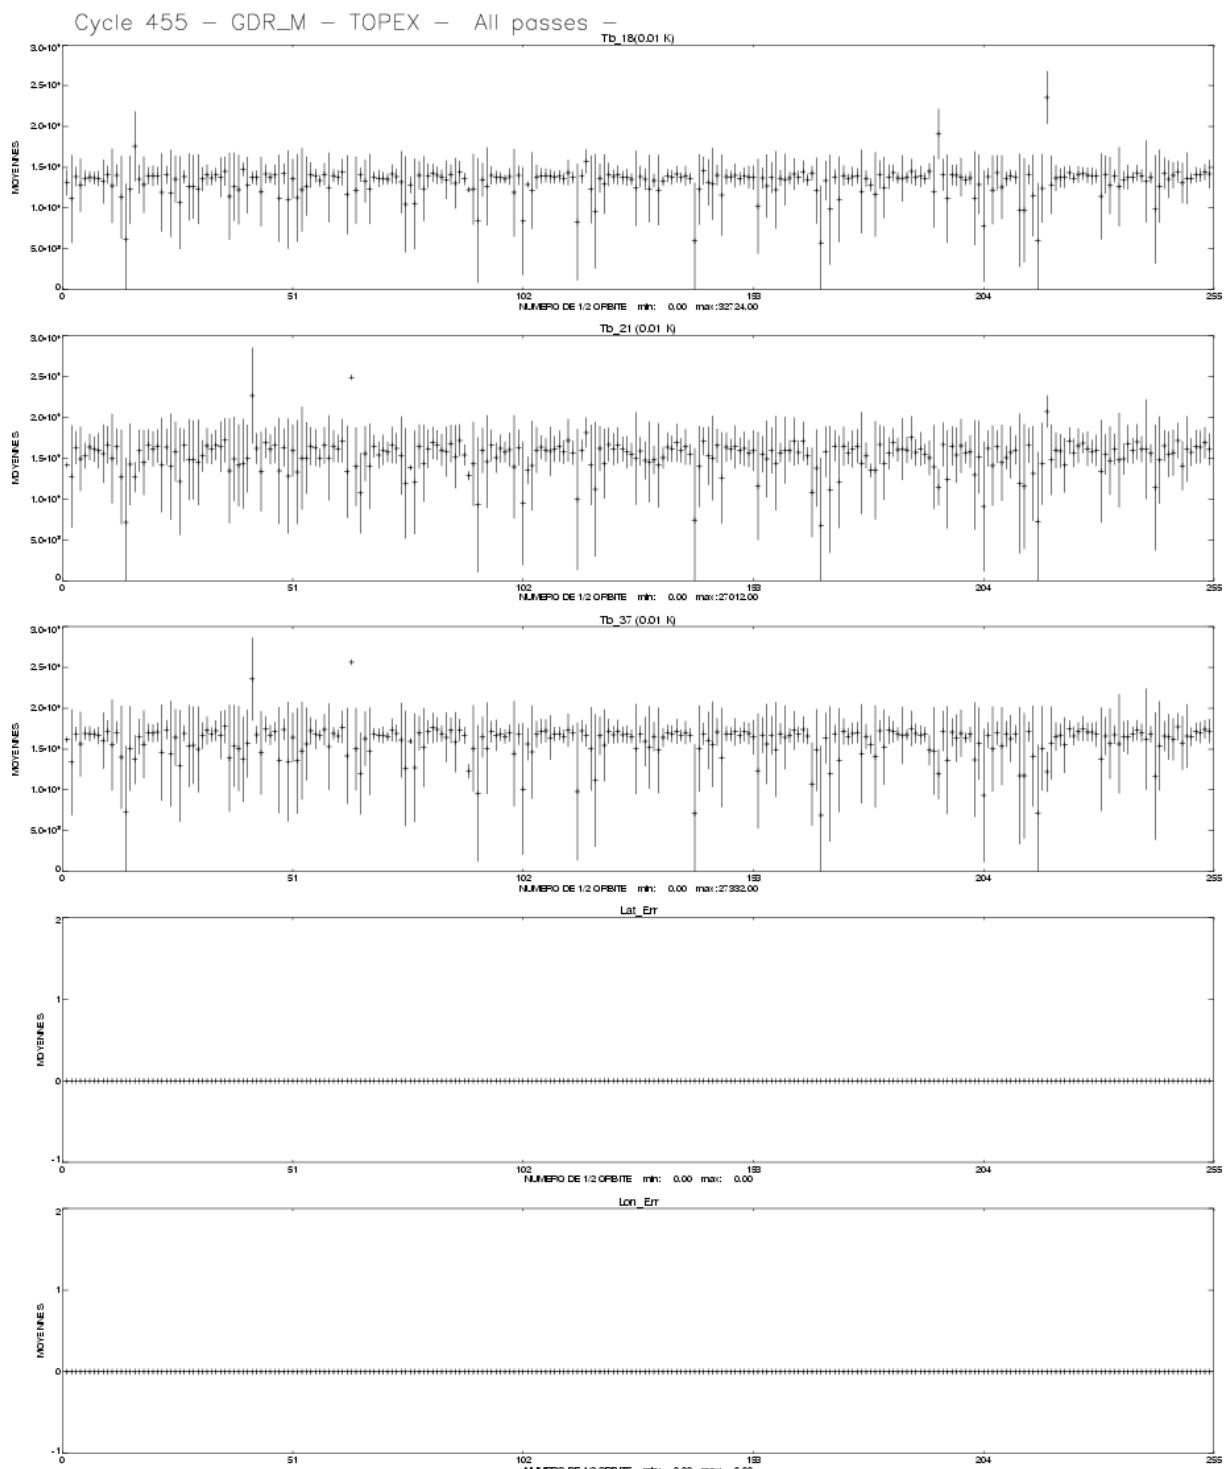




Cycle 455 – GDR_M – TOPEX – All passes –

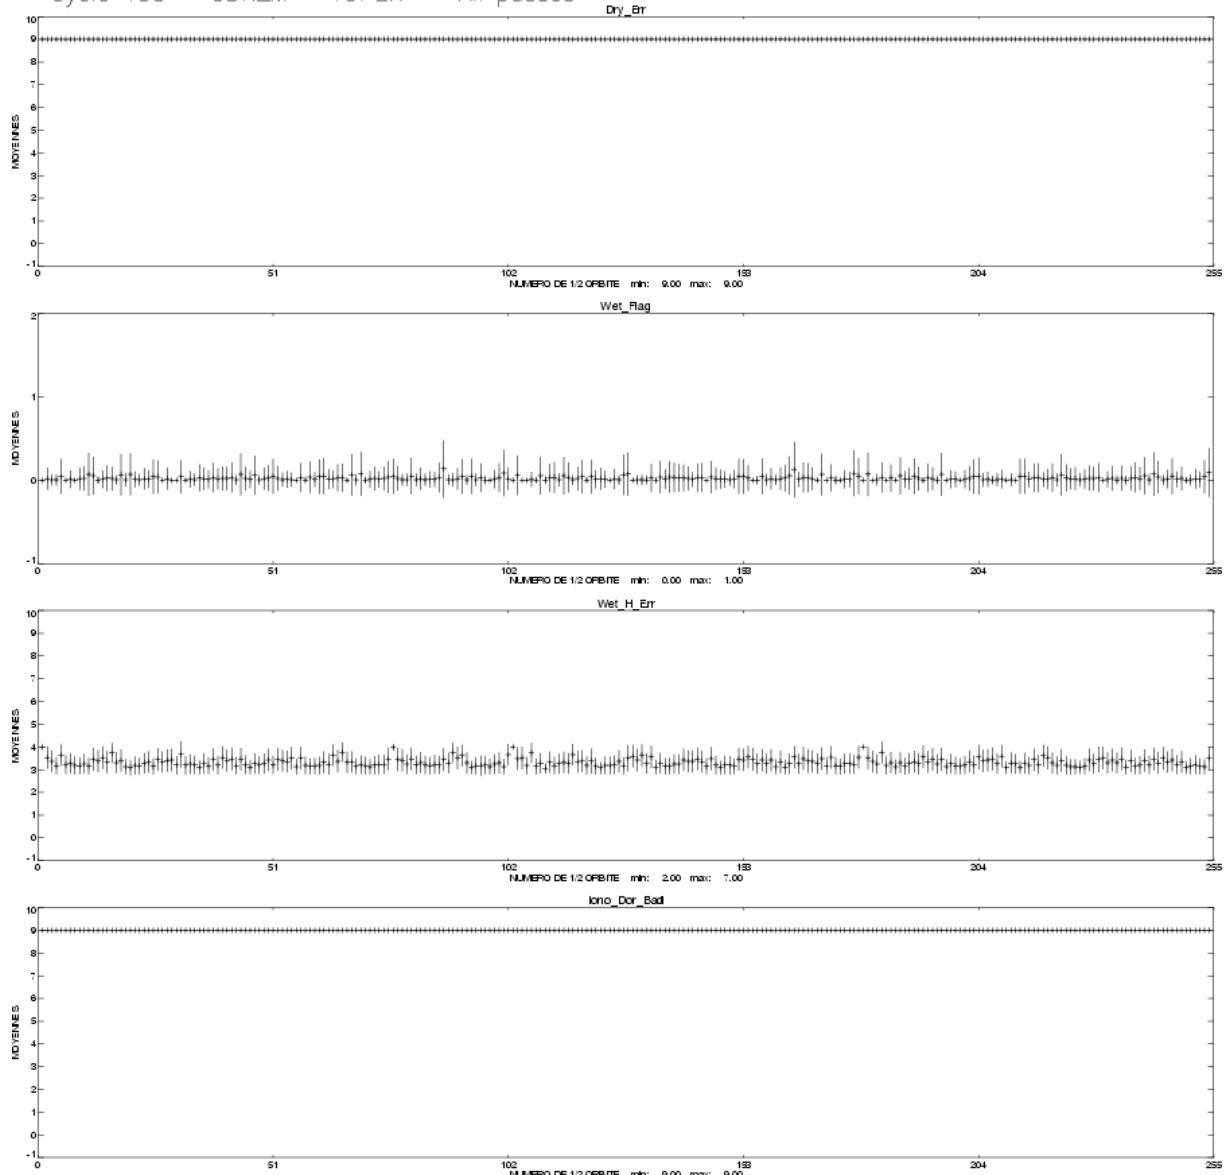


Cycle 455 – GDR_M – TOPEX – All passes –

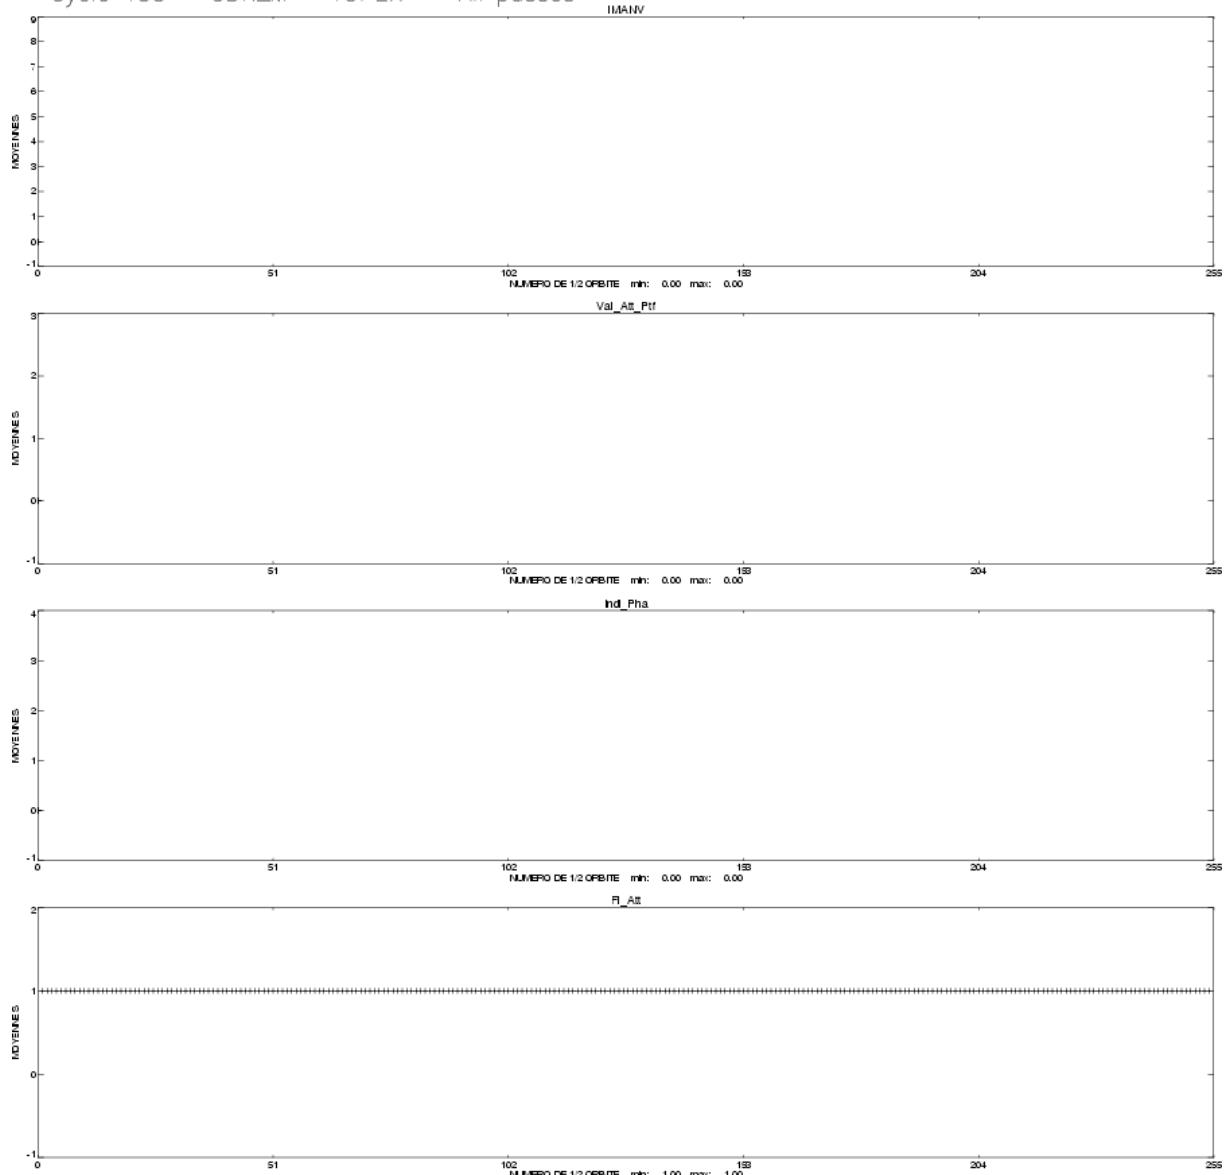

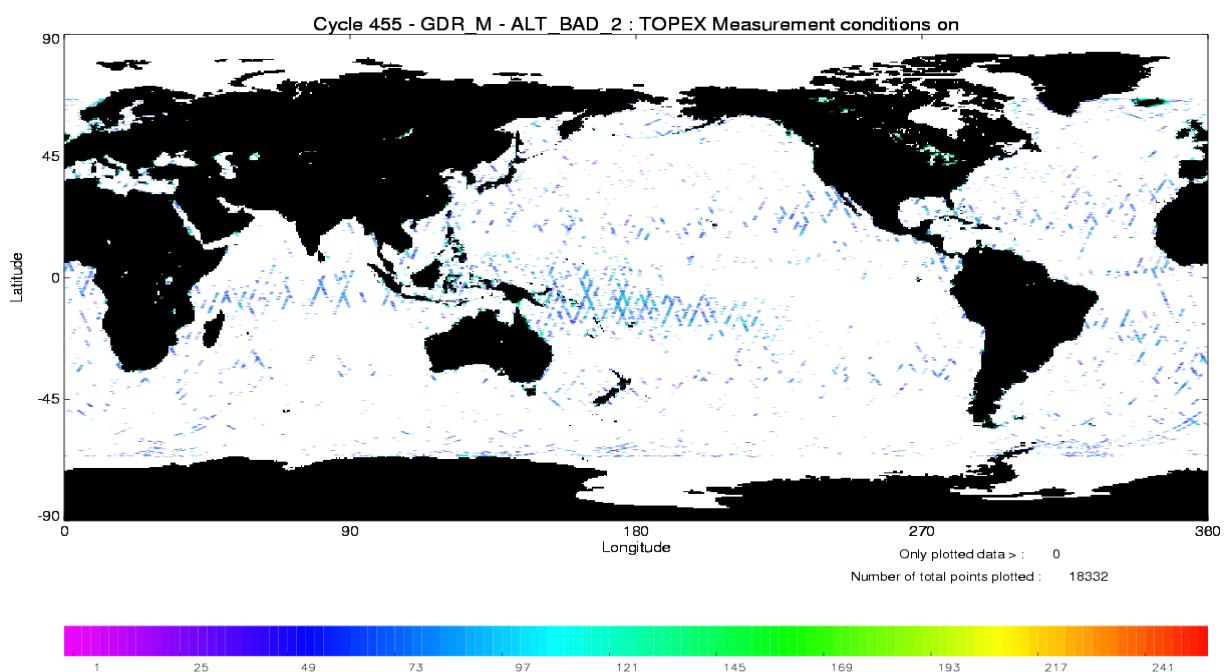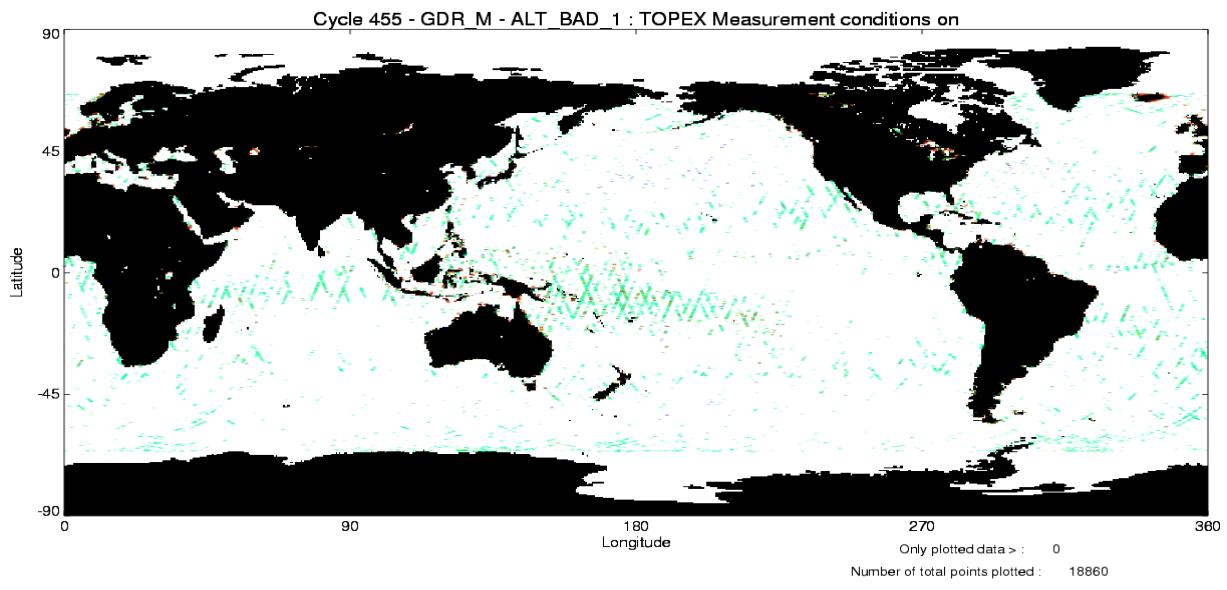

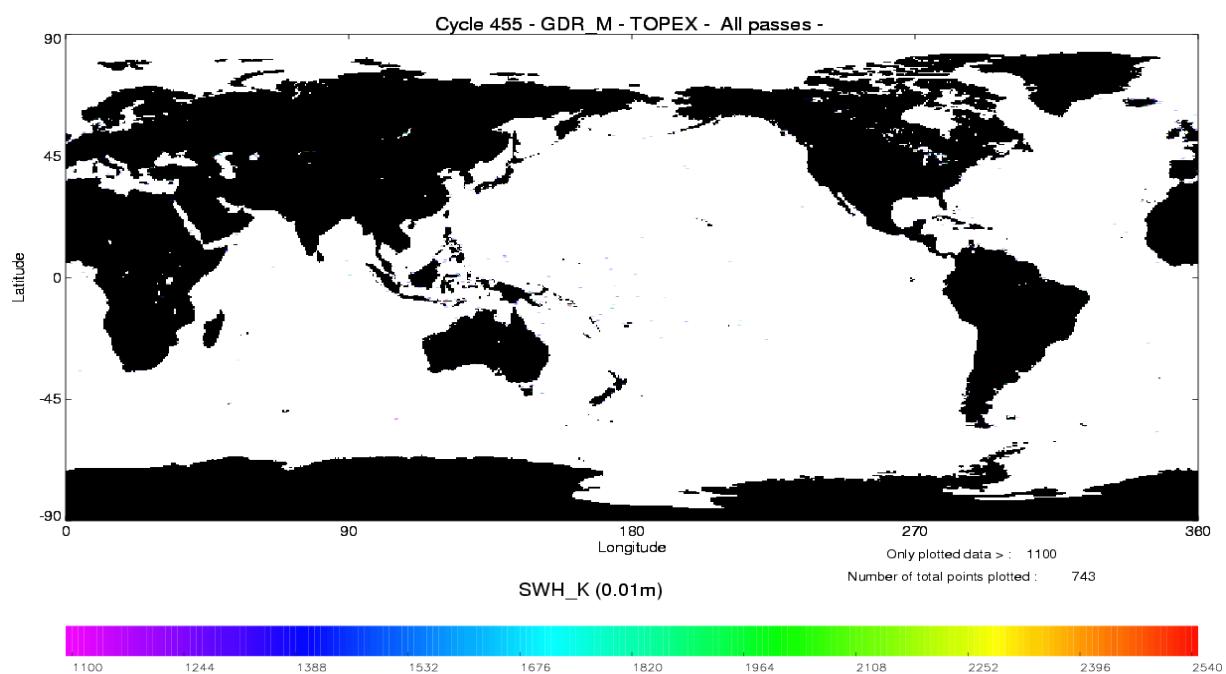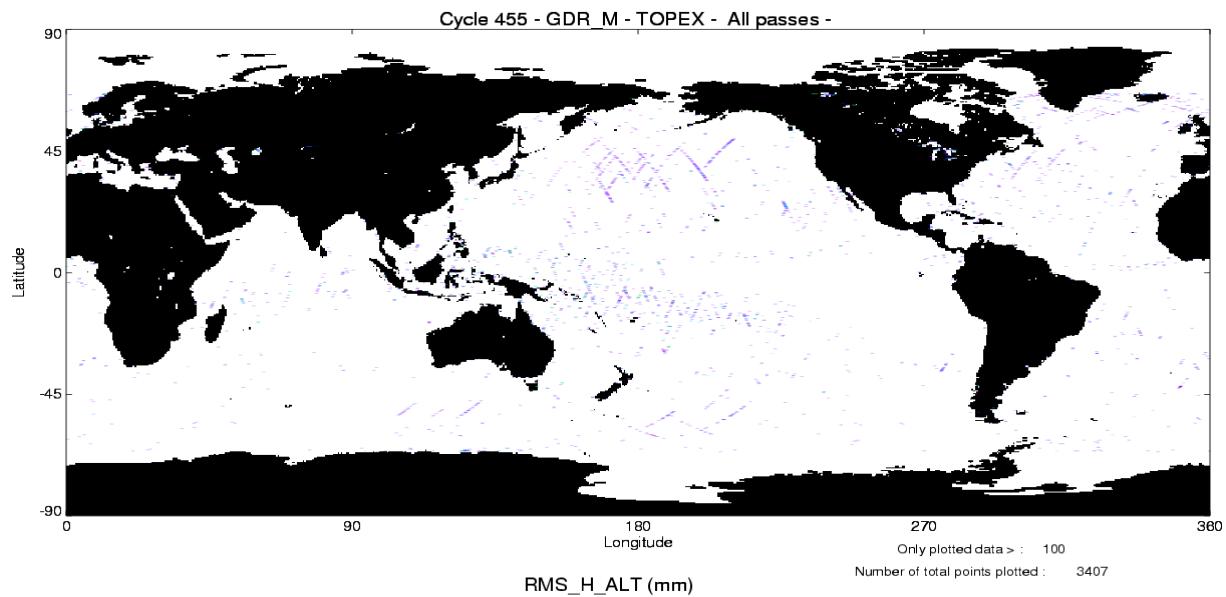

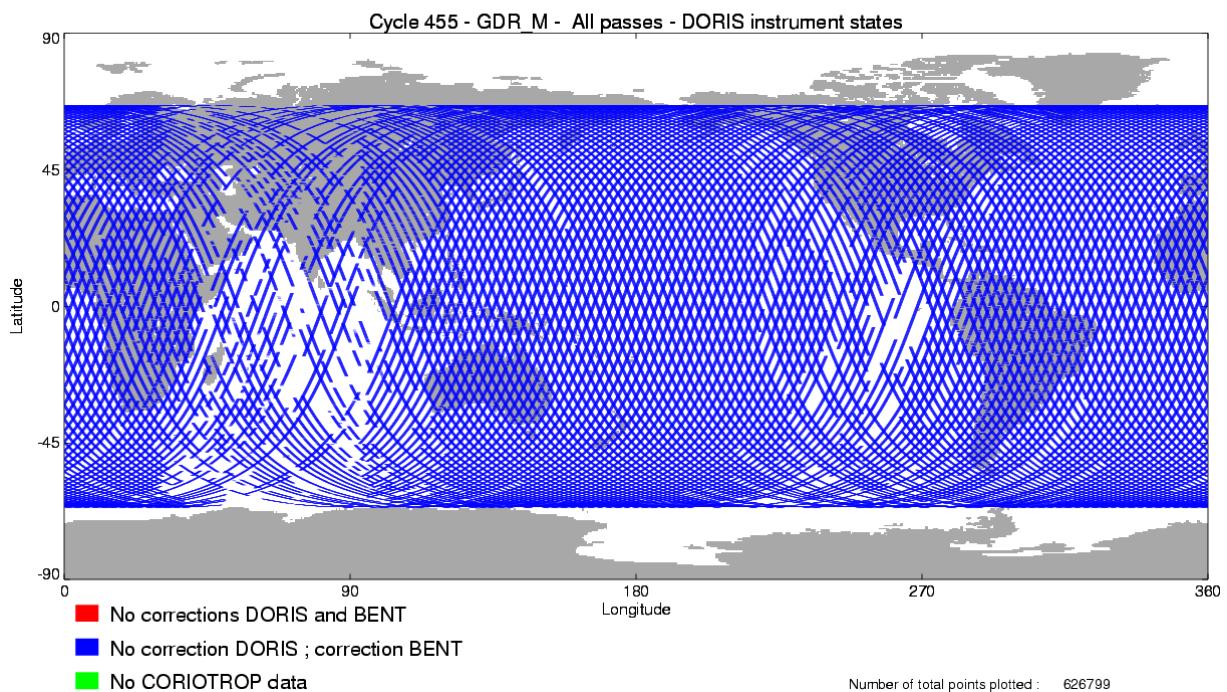

3.4 Editing

The following table gives for each tested parameter, minimum and maximum thresholds, the number and the percentage of points removed. As a comparison, the mean percentage over one year (1997) is also given.

There are problems in the interpolation of the TMR parameters since cycle 371 when there are missing measurements (tape recorder failures). These bad measurements are removed by the TMR correction criterion but some of them have been kept. Thus a new criterion has been added to the editing procedure since the cycle 376 to remove all the measurements where the absolute value of the difference between the TMR correction and the ECMWF model wet tropospheric correction is greater than 20 cm.


Probably due to the interpolation problem with the TMR, some measurements have radiometer land flag unset over land. This has no impact on the valid data because these measurements have been edited by the altimetric parameter criteria. Nevertheless, this anomaly leads to wrong statistics of the edited measurements. Therefore a new criterion has been added in the editing procedure to remove all the measurements for which the radiometer land flag is set to ocean and the altimeter land flag is set to land.

The number and percentage of points removed by each criterion is given on the following table. Note that these statistics are obtained with measurements already edited for radiometer land flag (26.52 % of points removed) and ice flag (2.79 % of points removed).


Parameters	Min Thres.	Max Thres.	Unit	Mean removed in 1997	% removed
Sea surface height	-130.000	100.000	m	1.37	0.12
Number of 20/10Hz valid points Poseidon/TOPEX	5.000	-		1.37	0.20
Std. deviation of range	0.000	0.100	m	1.85	0.79
Off nadir angle from waveform	0.000	0.400	deg	1.36	3.00
Dry tropospheric correction	-2.500	-1.900	m	0.00	0.00
Invert barometer correction	-2.000	2.000	m	0.00	0.00
TMR wet tropospheric correction	-0.500	-0.001	m	0.34	6.57
Ionospheric correction (Poseidon:Doris, TOPEX:Dual)	-0.400	0.040	m	0.00	0.22
Significant wave height	0.000	11.000	m	1.46	0.07
Sea state Bias	-0.500	0.000	m	1.39	0.09
Backscatter coefficient	7.000	30.000	dB	1.44	0.09
Ocean tide height	-5.000	5.000	m	0.01	0.13
Earth tide	-1.000	1.000	m	0.00	0.00
Pole tide	-15.000	15.000	m	0.00	0.00
TMR and ECMWF tropospheric differences	-0.200	0.200	m	NaN	0.34
Spline fitting					0.01

The following three maps are complementary: they show respectively the removed, the selected measurements and the percentage of selected measurements in the editing procedure.


Valid data
TOPEX/Poseidon Cycle 455 (19/01/2005 / 29/01/2005)

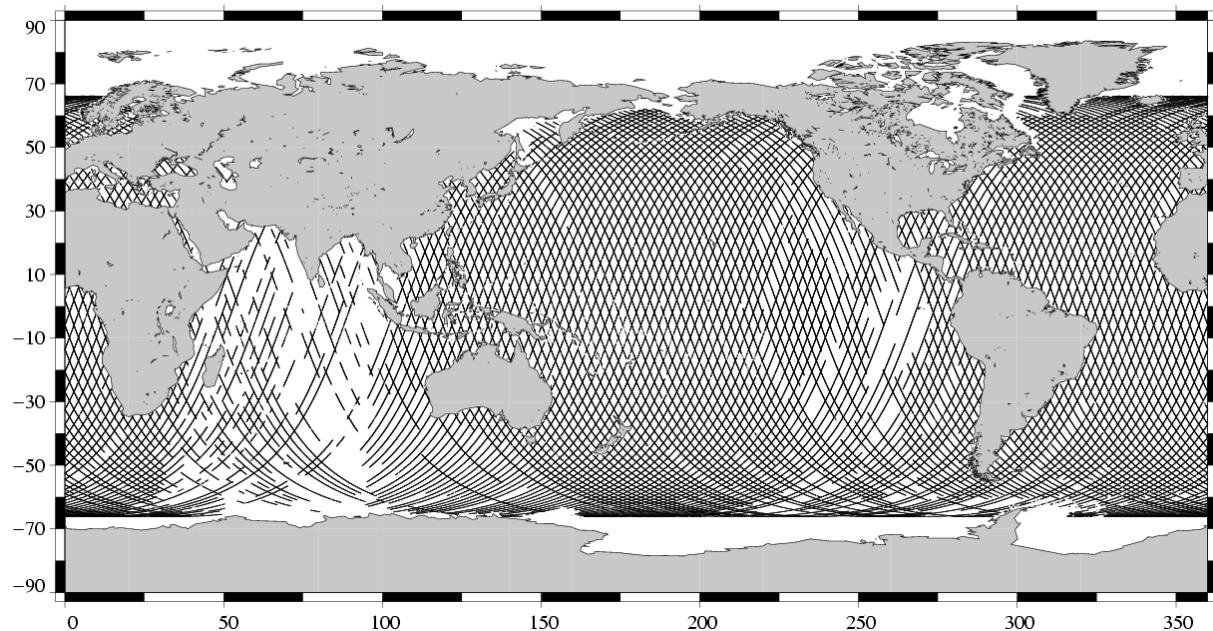


Edited measurements
TOPEX Cycle 455 (19/01/2005 / 29/01/2005)

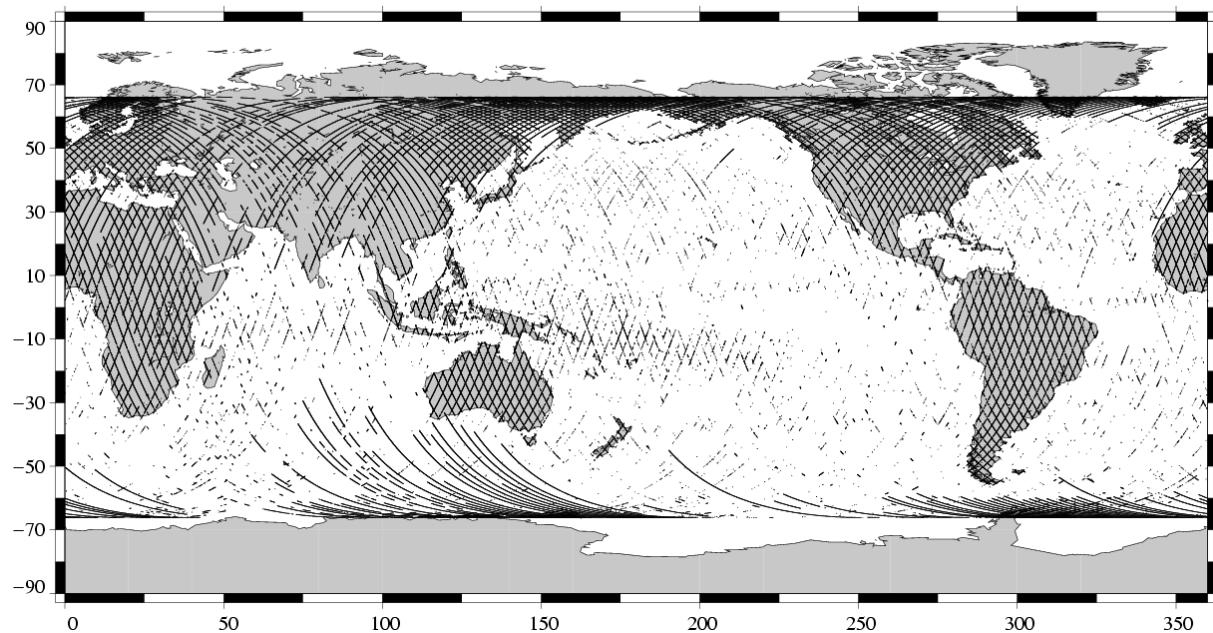


Percentage of valid data relative to the nominal pass
TOPEX/Poseidon Cycle 455 (19/01/2005 / 29/01/2005)

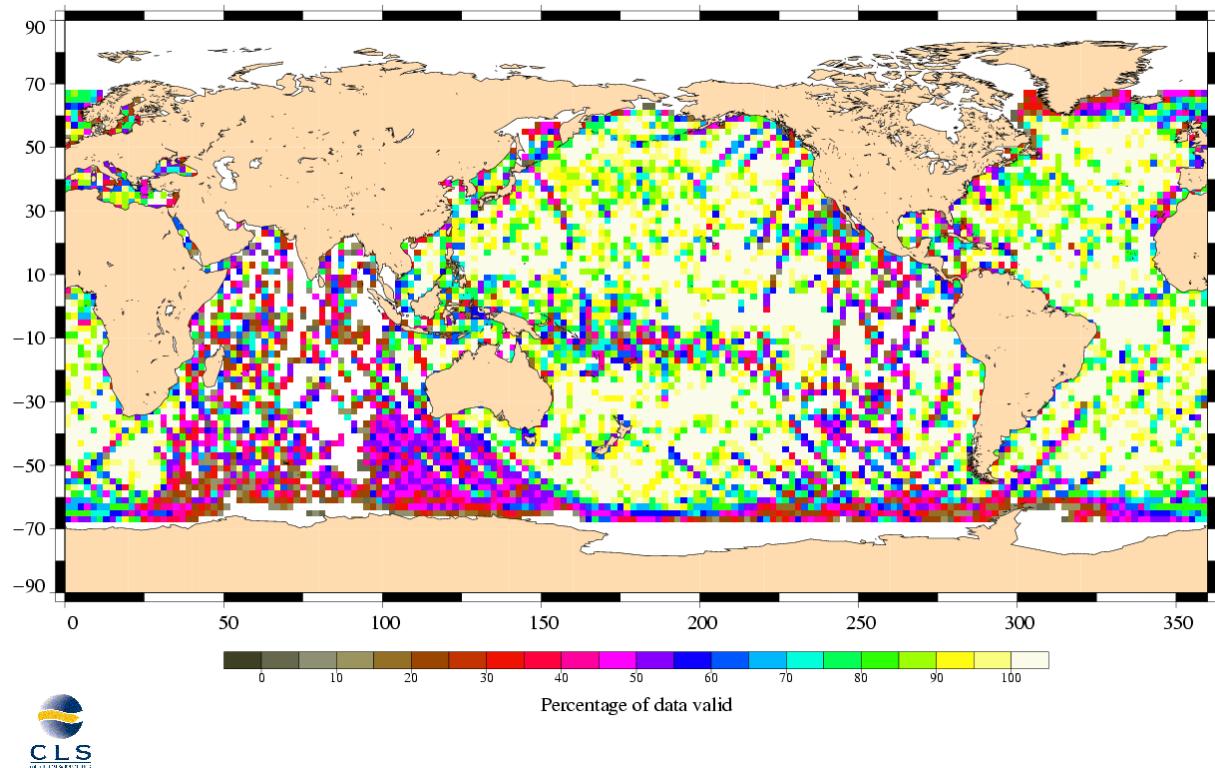


3.5 Ionospheric correction

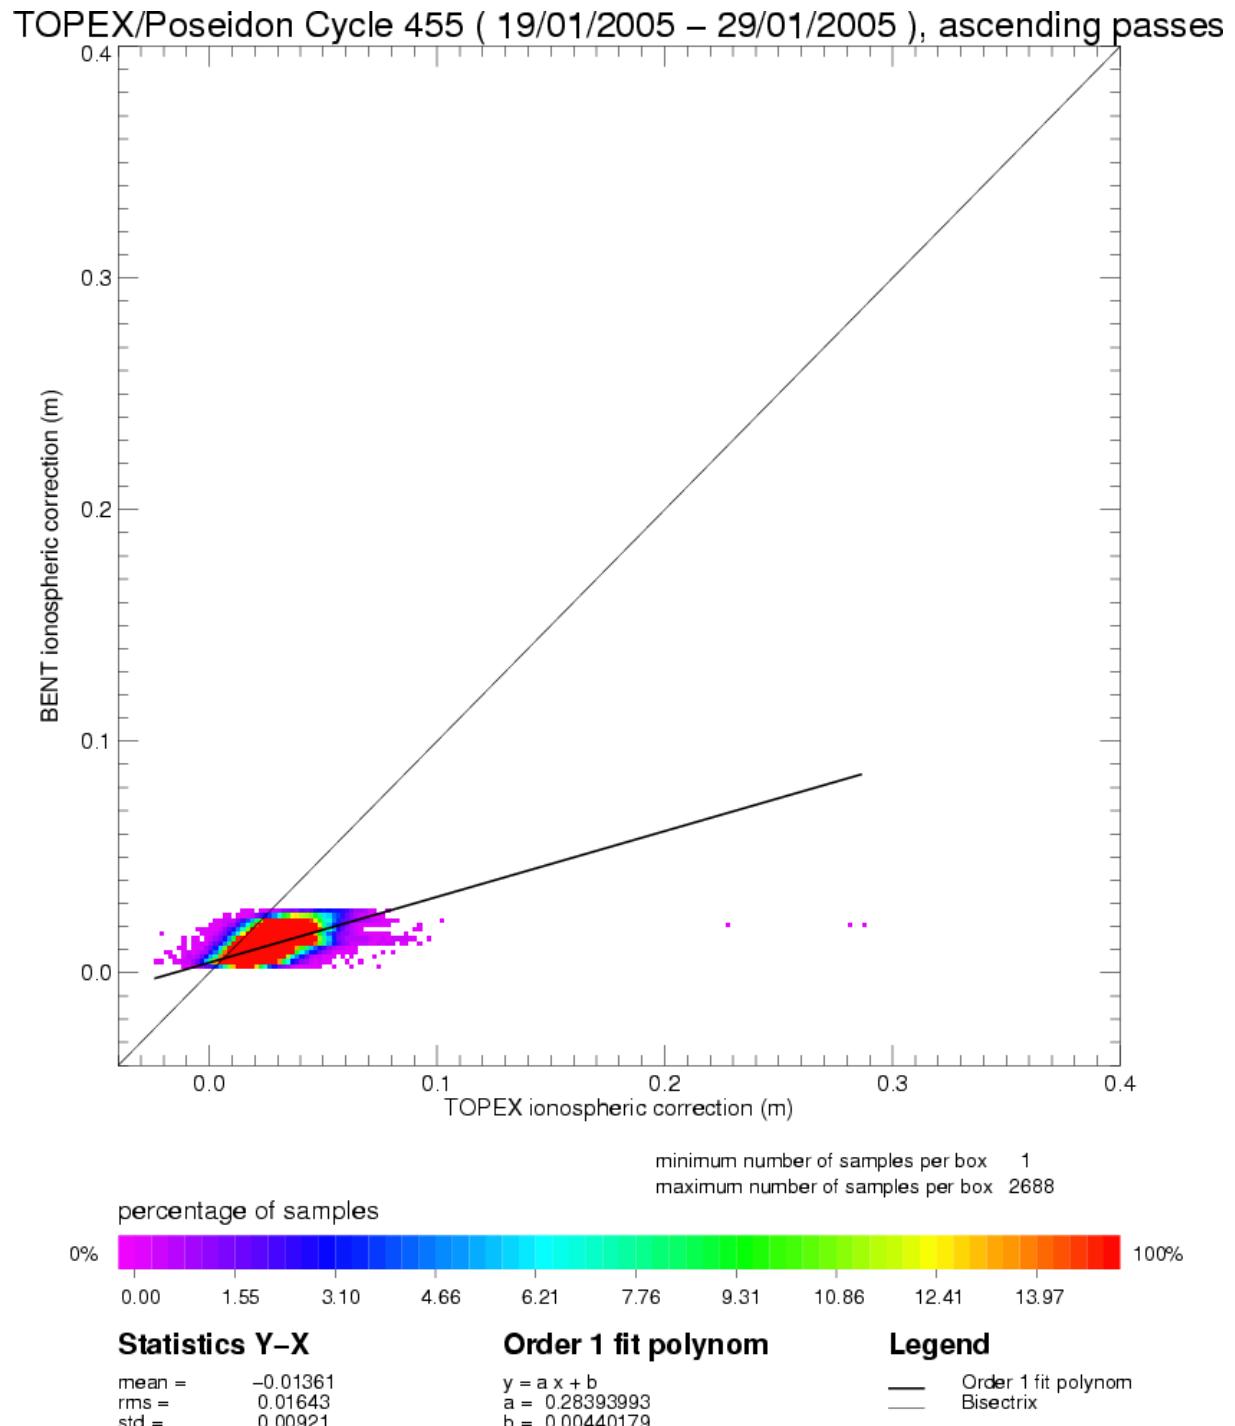


TOPEX/Poseidon Cycle 455 (19/01/2005 – 29/01/2005), descending passes


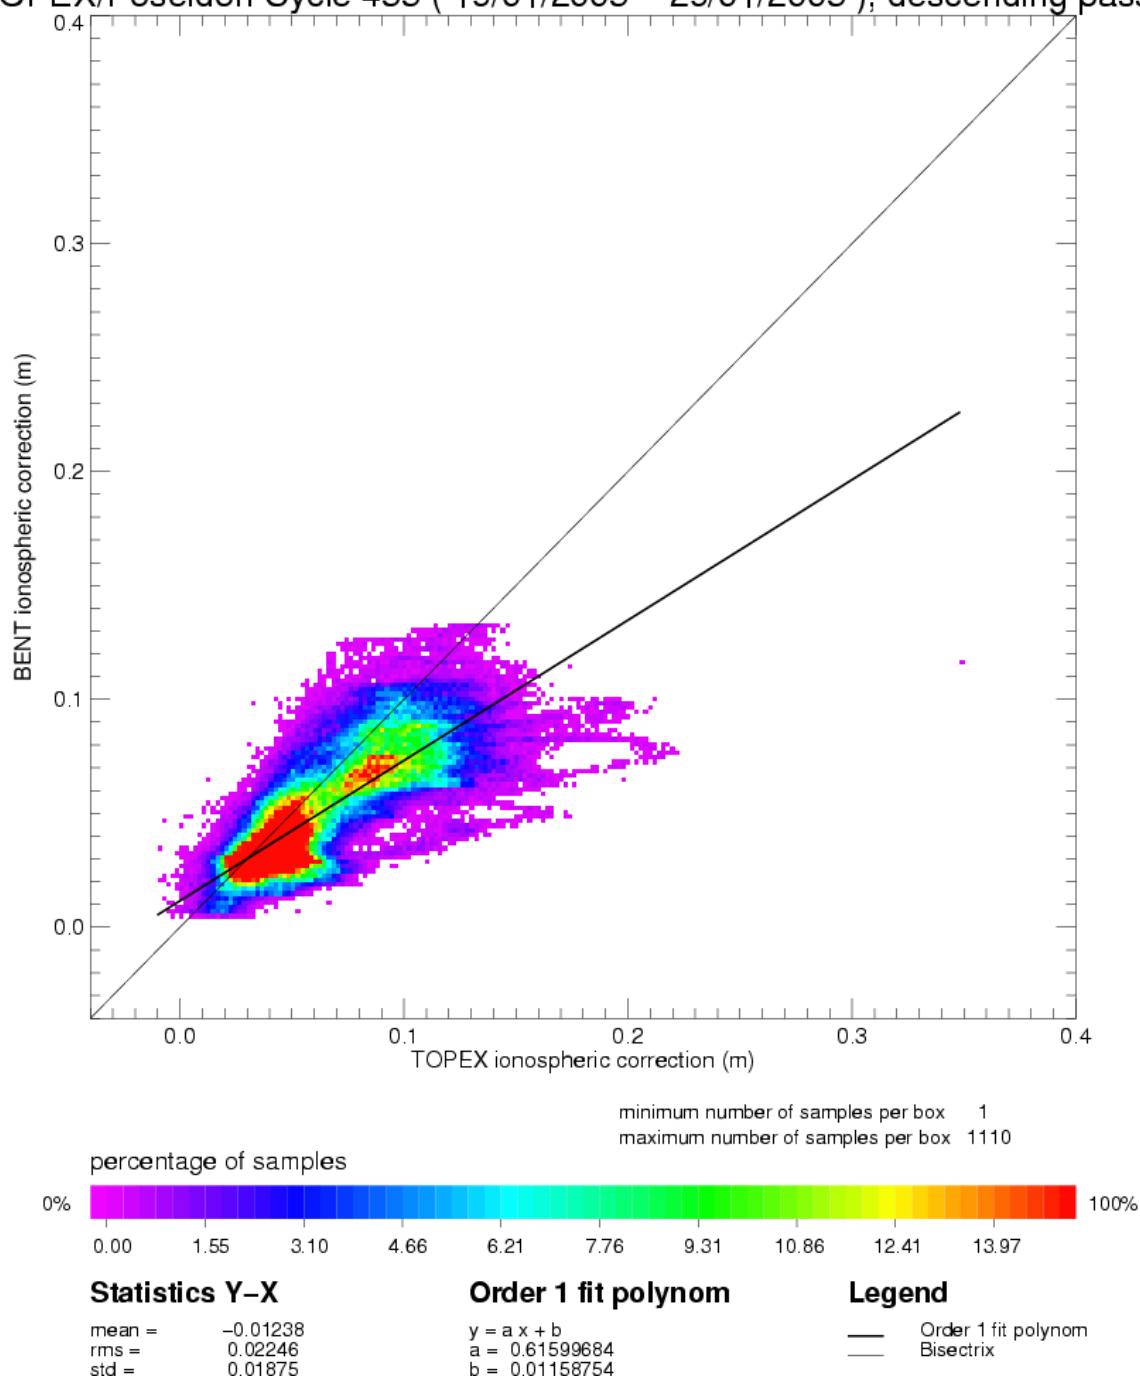


3.6 Wet tropospheric corection

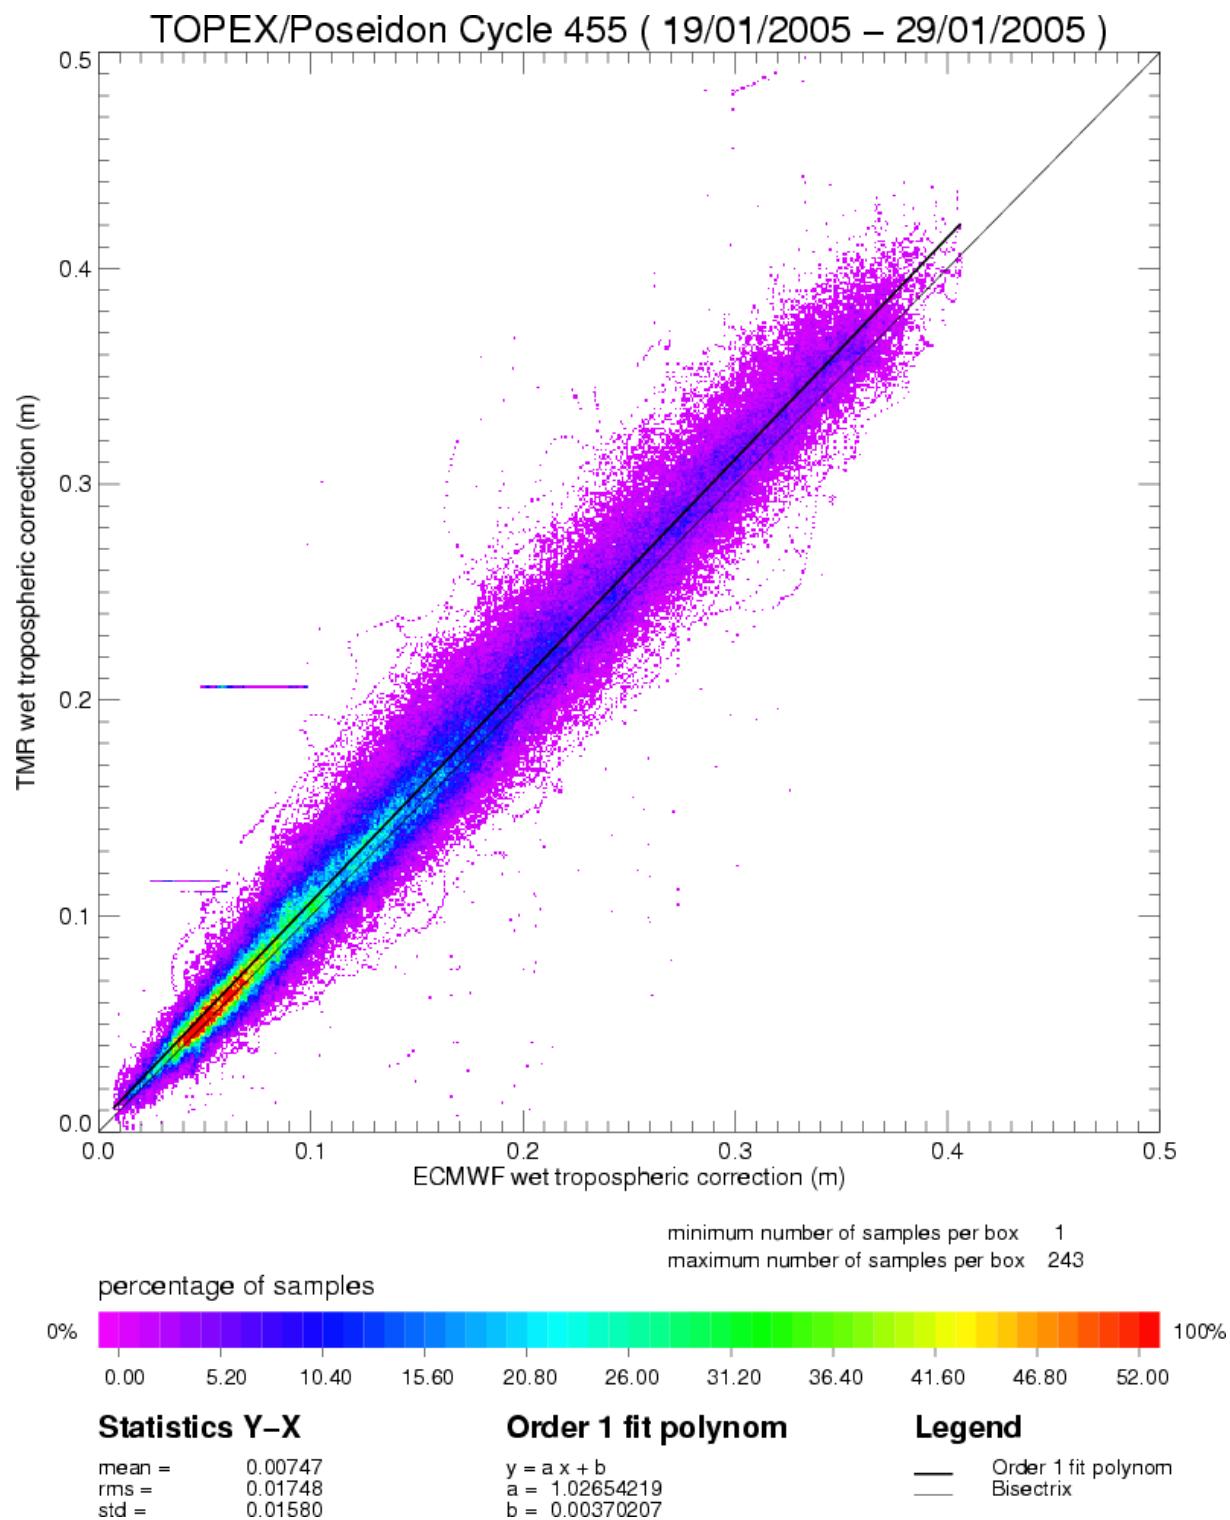

3.7 Crossover statistics

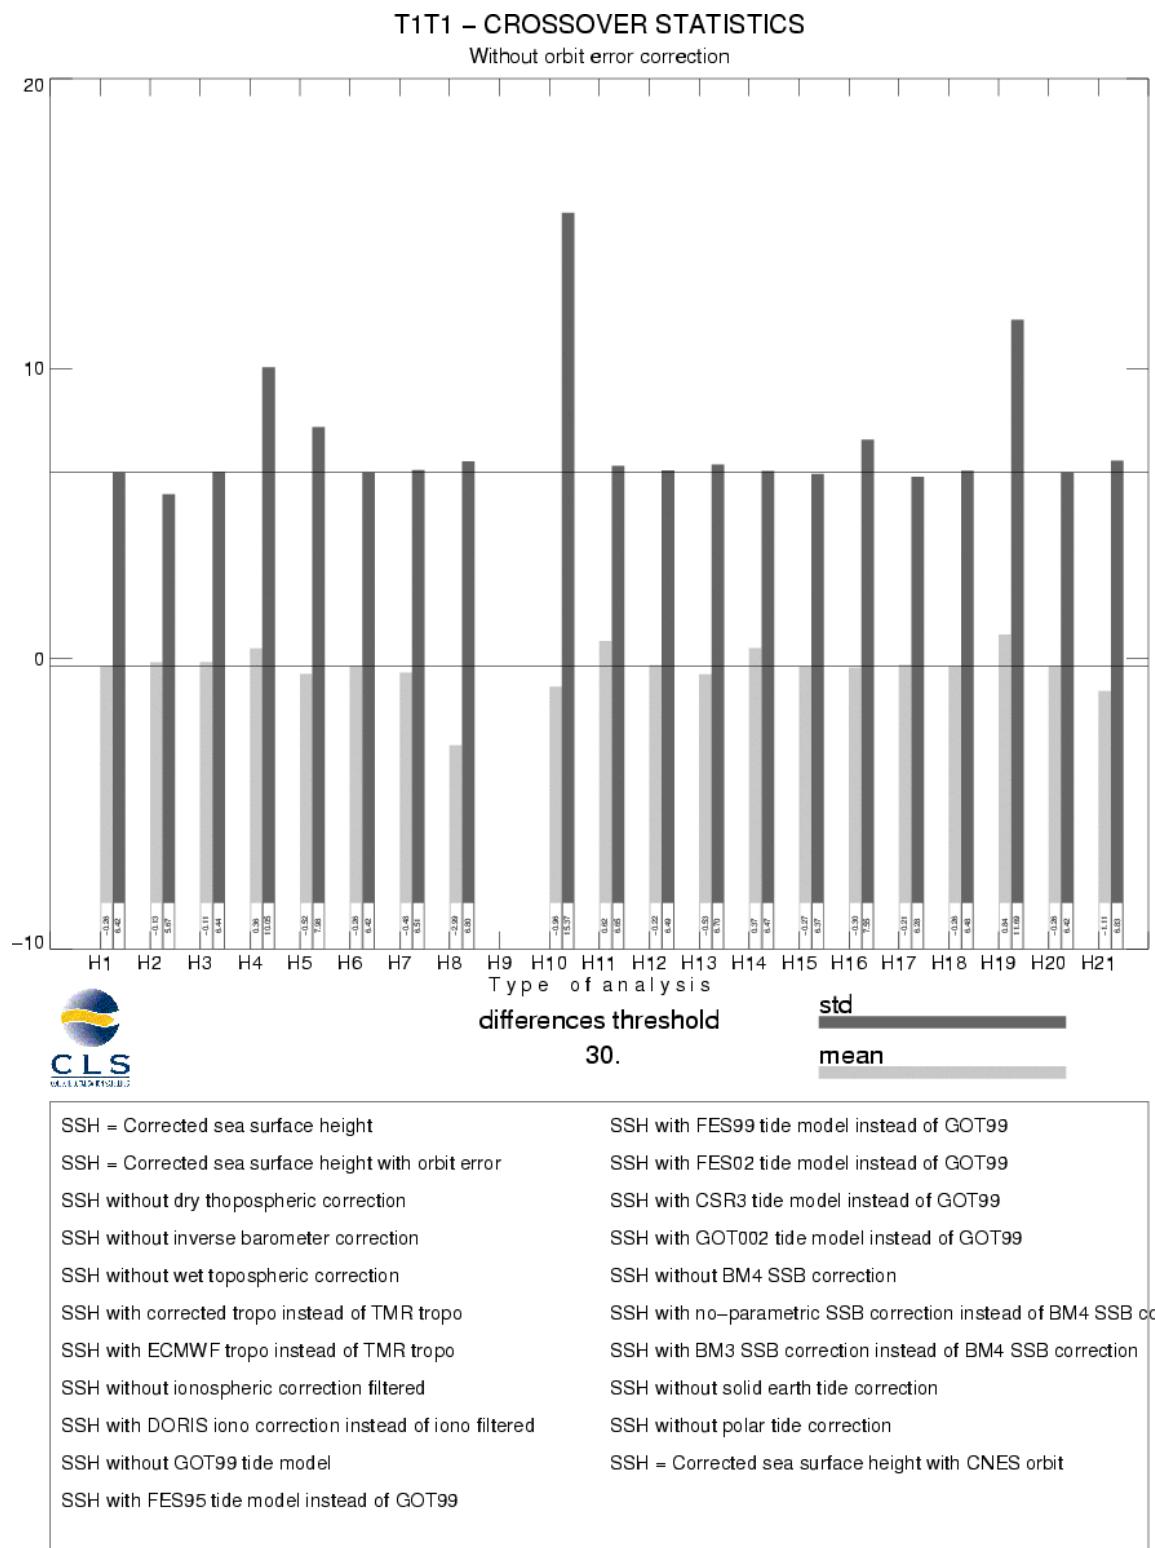

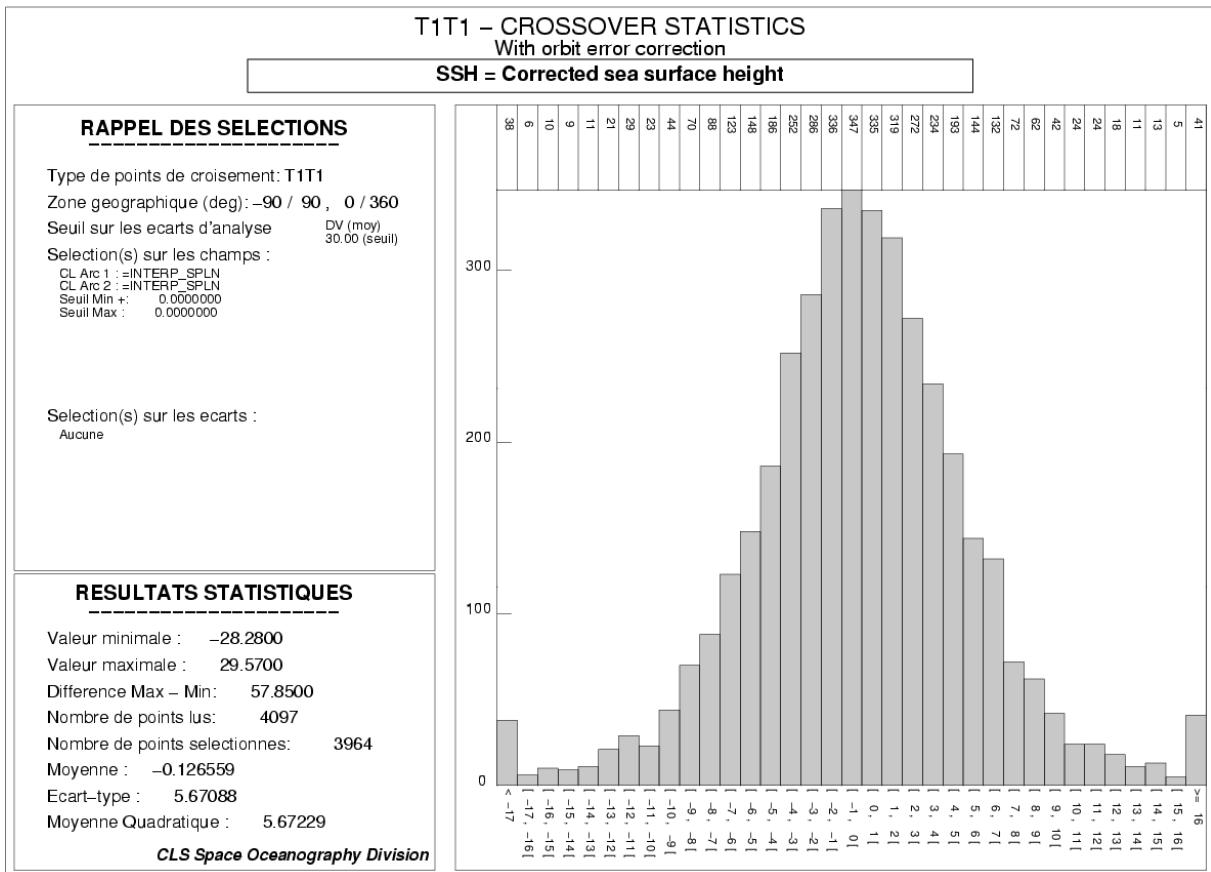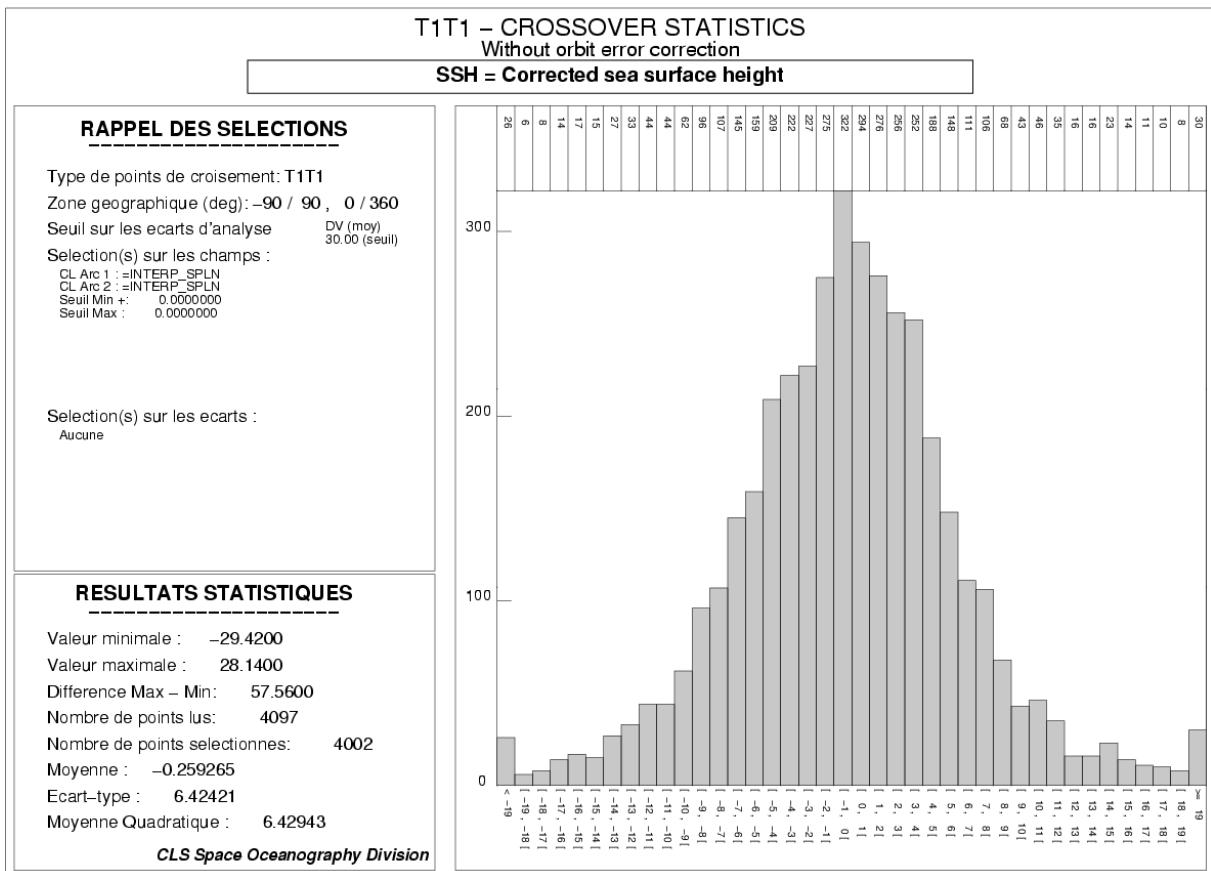

T1T1 – CROSSOVER STATISTICS

SSH, BATHY < -1000 m, VAR_OCE < 20 cm, LAT [-50°, +50]

SSH = Corrected sea surface height before orbit error

RAPPEL DES SELECTIONS

Type de points de croisement: T1T1

Zone géographique (deg): -50 / 50 , 0 / 360

Seuil sur les écarts d'analyse : aucun

Selection(s) sur les champs :

CL Arc 1 : =BATHY

CL Arc 2 : =BATHY

Seuil Min : aucun

Seuil Max : -100000.00

[...]

Selection(s) sur les écarts :

Aucune

RESULTATS STATISTIQUES

Valeur minimale : -25.2800

Valeur maximale : 43.1700

Difference Max – Min: 68.4500

Nombre de points lus: 2757


Nombre de points sélectionnés: 2084

Moyenne : -0.0374376

Ecart-type : 5.84916

Moyenne Quadratique : 5.84928


CLS Space Oceanography Division

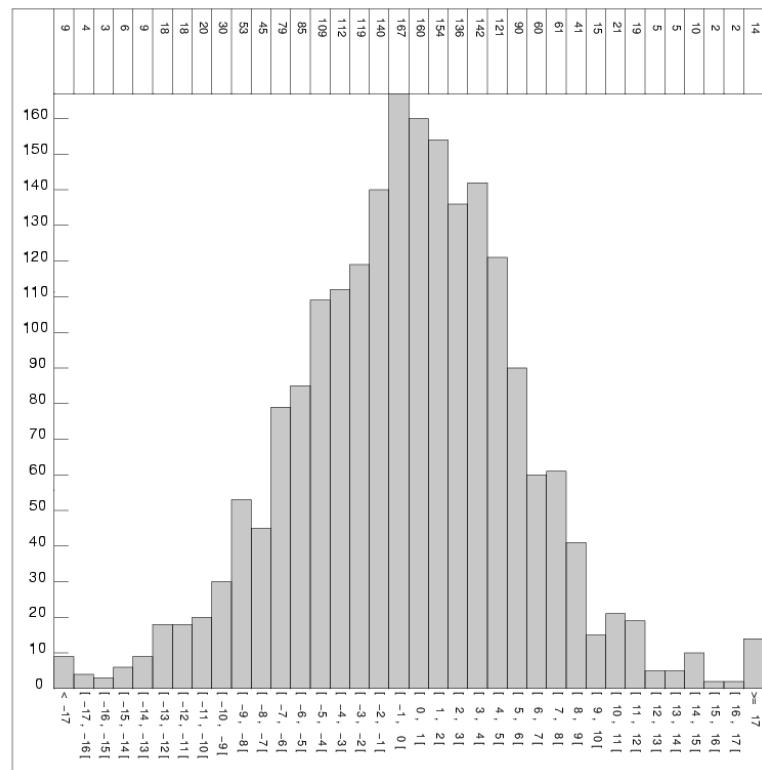


3.8 SSH variability

3.8.1 Sea Level Anomaly


TOPEX/Poseidon, cycle 455
Period : 19/01/2005 – 29/01/2005

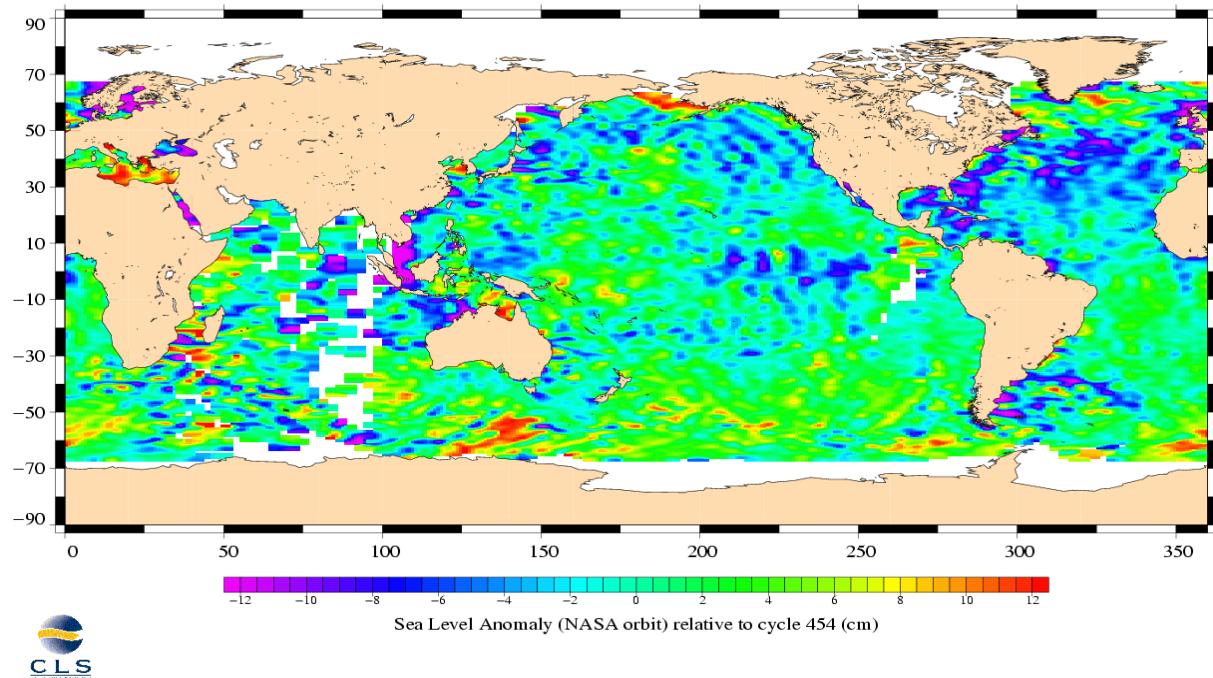

TOPEX/Poseidon, cycle 455
Period : 19/01/2005 – 29/01/2005

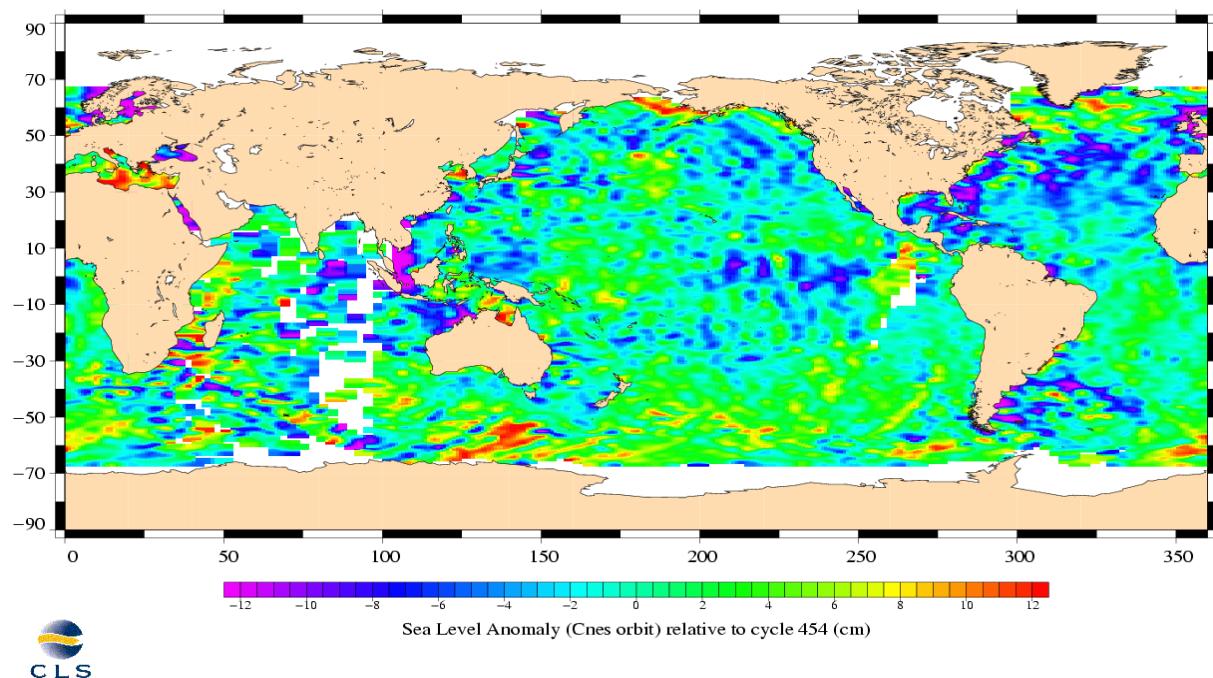


TOPEX/Poseidon, cycle 455
Period : 19/01/2005 – 29/01/2005

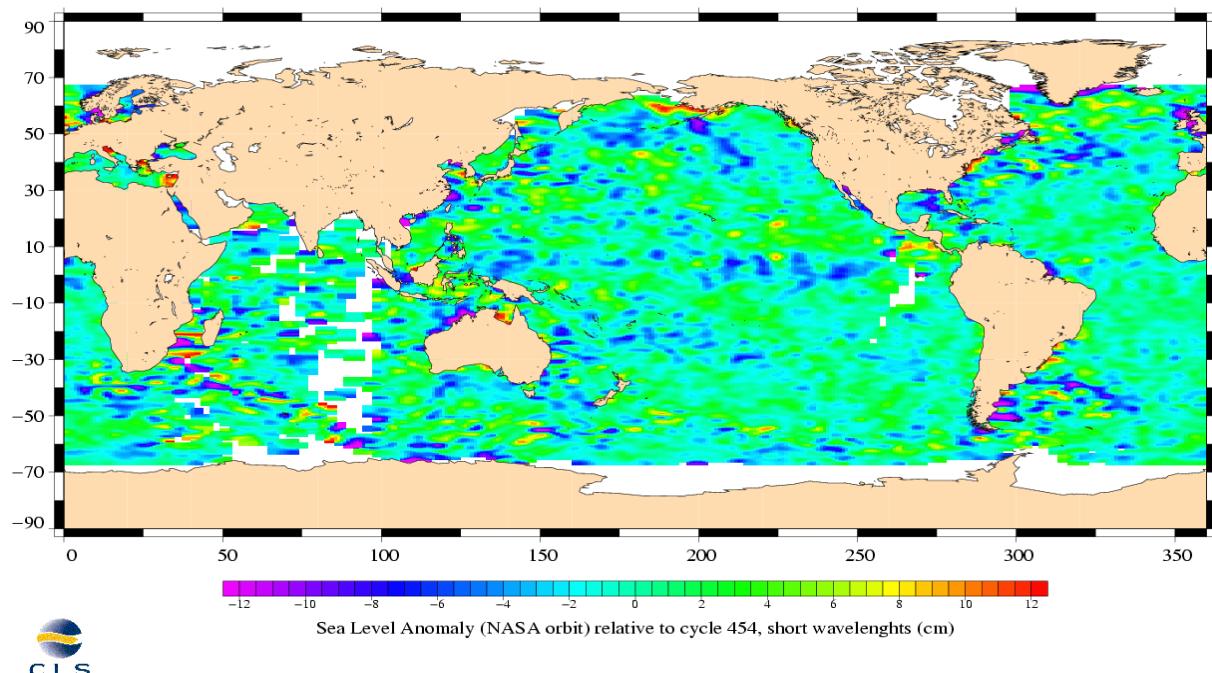


3.8.2 Comparison to a precise Mean Sea Surface

The CLS (2001) MSS model is used as a reference to compute SLA. The two following maps respectively show the map of Topex SLA relative to the MSS and differences higher than a 30 cm threshold (after centering the data). The latter figure shows that higher differences are located in high ocean variability areas, as expected.

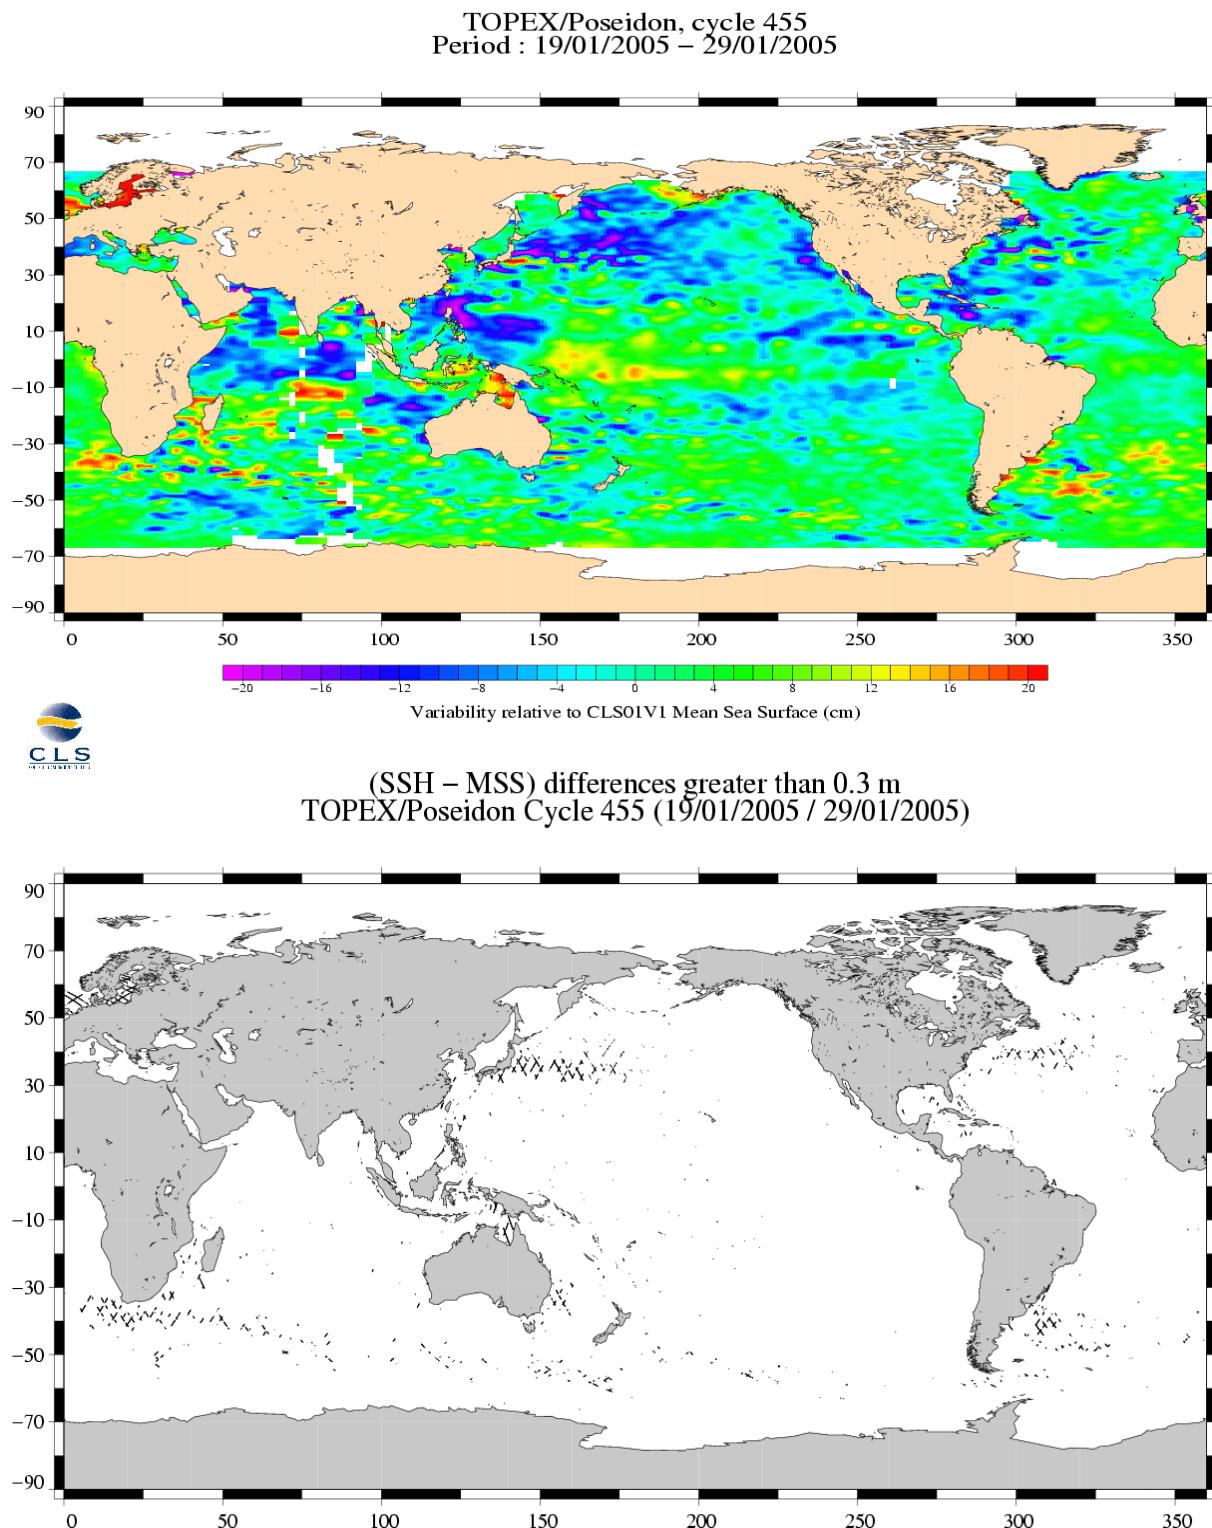

3.9 Dynamic topography


TOPEX/Poseidon, cycle 455
Period : 19/01/2005 – 29/01/2005

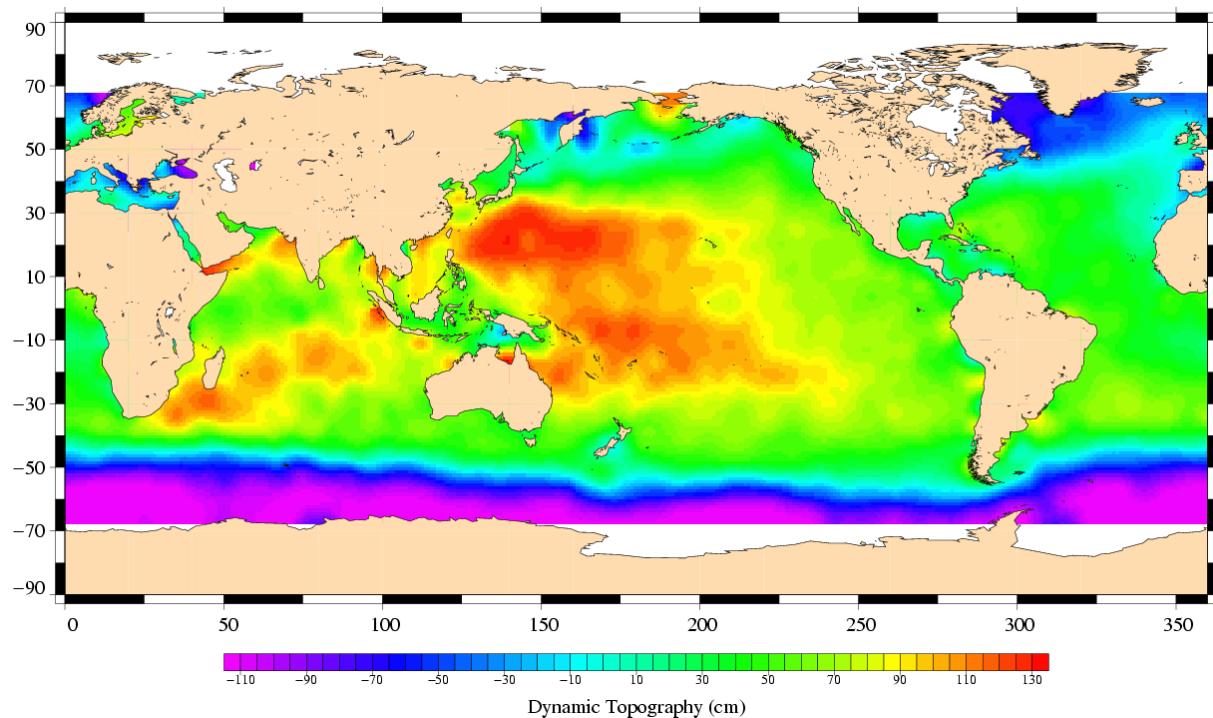

3.10 Wind and wave maps

These two figures show wind and wave estimations derived from 10 days of altimeter measurements.

TOPEX/Poseidon, cycle 455
Period : 19/01/2005 – 29/01/2005

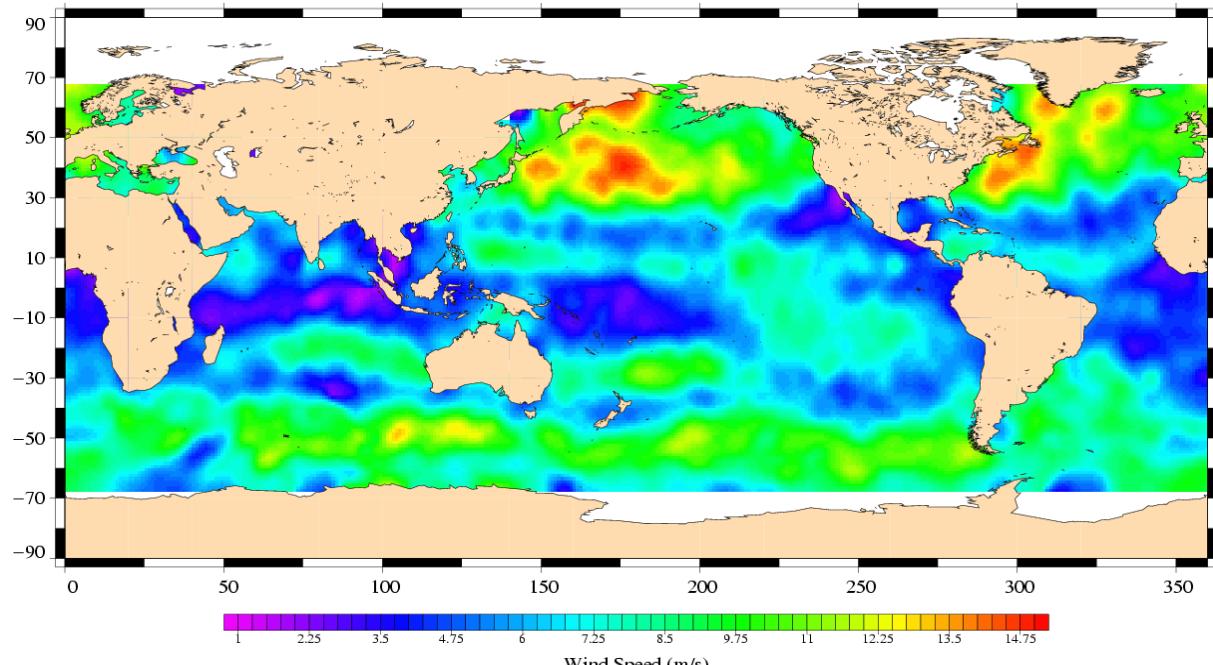

TOPEX/Poseidon, cycle 455
Period : 19/01/2005 – 29/01/2005

