

# **TOPEX/Poseidon MGDR** Quality Assessment Report

Cycle 405

# 12-09-2003 21-09-2003

| Prepared by :  | C. Schgounn, CLS   |  |
|----------------|--------------------|--|
|                | G. Pontonnier, CLS |  |
|                | M. Ablain, CLS     |  |
| Accepted by :  | J. Dorandeu, CLS   |  |
| Quality visa : | M. Destouesse, CLS |  |
| Approved by :  | N. Picot, CNES     |  |







SALP-RP-P2-EX-21120-CLS405 Edition 01.0, December 2003

# 1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the Topex/Poseidon mission. The document is associated with data dissemination on a cycle by cycle basis.

The objectives of this document are :

To provide a data quality assessment To provide users with necessary information for data processing

To report any change likely to impact data quality at any level, from instrument status to software configuration

To present the major useful results for the current cycle

It is divided into the following topics:

Cycle overview CALVAL main results

# 2 Cycle overview

## 2.1 Cycle quality and performances

Data quality for this cycle appears to be nominal. For this cycle, the crossover standard deviation is 6.85 cm rms, and the standard deviation of Sea Level Anomalies (SLA) relative to a Mean Sea Surface is 9.59 cm.

## 2.2 Warnings and recommendations


- Missing measurements :
  - There is a lot of data gaps due to tape recorder anomalies, especially in the Indian Ocean, in the South Pacific Ocean close to the South and Central America coasts and below the Groenland coasts.
  - Pass 111 is missing from current data set, a large part of measurements are missing for passes 113 and 190. No information allows to explain this anomaly.
- Measurements edited by the TMR parameters :

The following anomalies are explained by the problems in the interpolation of the TMR parameters due to tape recorder failures :

- 2.30% of the measurements are removed by the TMR correction criterion (see the following figure).
- Some measurements have radiometer earth flag set to valid over earth. A new criterion has been added to the editing procedure to remove all these measurements (see **Editing**).

Pass 164,216 and 154 are partly rejected (below South Americ and Australia) by the radiometer land flag criterium. This flag is set to defalut value. This anomaly seems not linked with the problems in the interpolation of the TMR parameters and is under investigation.

Edited parameter : Radiometer wet tropospheric correction T/P Cycle 405 (12/09/2003 / 21/09/2003)

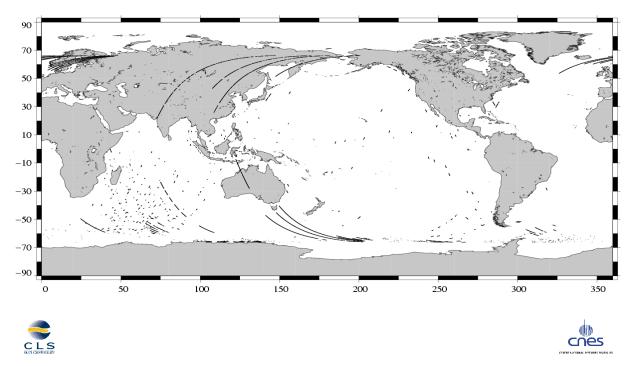


# 3 CALVAL main results

This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

#### 3.1 Missing measurements


687335 altimeter measurements are present, and 107192 are missing.

The map below shows all the available measurements for this cycle and illustrates the tape recorder problems. The latter figure shows missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.

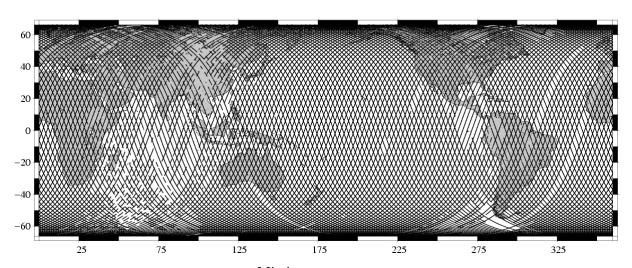

Available measurements TOPEX Cycle 405 (12/09/2003 / 21/09/2003)

Missing measurements TOPEX/Poseidon Cycle 405 (12/09/2003 / 21/09/2003)

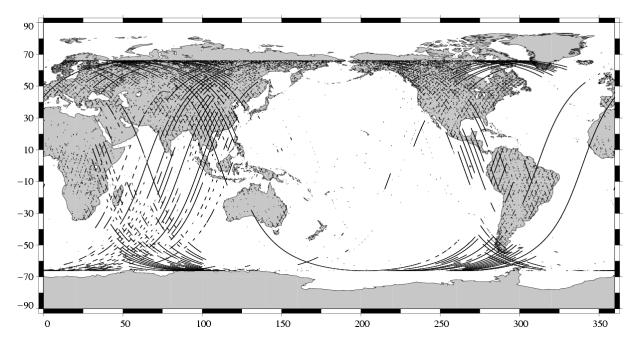


TOPEX/Poseidon GDR Quality Assessment Report **Cycle 405** 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405

# 3.2 M-GDR quality flags


The following table indicates the percentage of measurements for which those flags are set.


| Name      | Descrition                                        | % bad |
|-----------|---------------------------------------------------|-------|
| Geo_Bad_1 | altimeter land flag                               | 25.65 |
| Geo_Bad_1 | ice flag                                          | 8.62  |
| Geo_Bad_1 | radiometer land flag                              | 27.61 |
| Alt_Bad_1 | conditions 1 altimeter                            | 5.34  |
| Alt_Bad_2 | conditions 2 altimeter                            | 5.23  |
| Geo_Bad_2 | rain (liquid water in excess)                     | 5.42  |
| Geo_Bad_2 | less than 4 points for CSR3.0 tide calculation    | 0.45  |
| Geo_Bad_2 | less than 4 points for FES95.2.1 tide calculation | 3.19  |
| TOPEX     | TOPEX not valid                                   | 0.00  |
| TMR       | TMR not valid                                     | 0.00  |
| TMR_Bad   | Brightness temperatures not valid                 | 5.81  |
| DORIS     | DORIS not valid                                   | 0.00  |

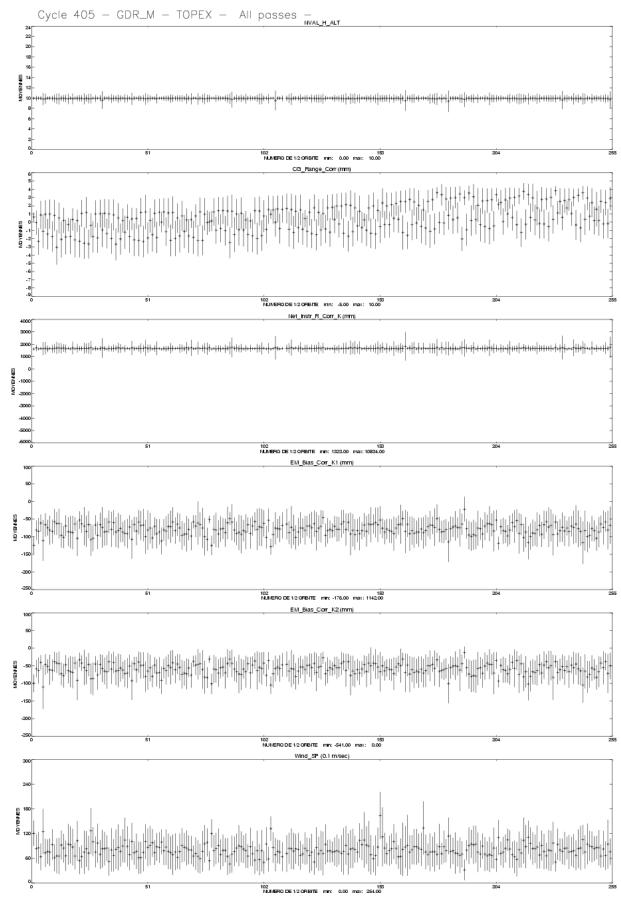


TOPEX/Poseidon GDR Quality Assessment Report Cycle 405 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405 Page 6


#### 3.3 M-GDR parameter plots

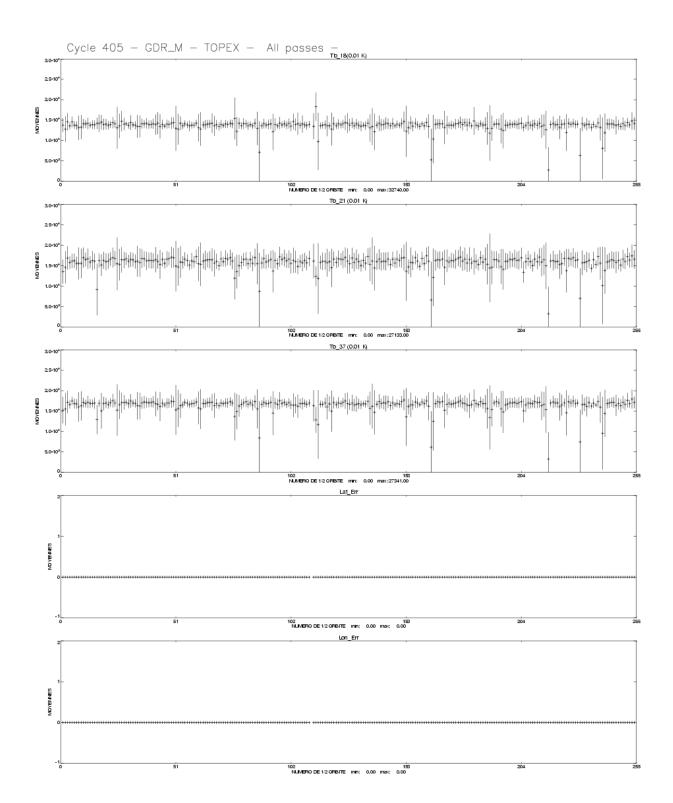

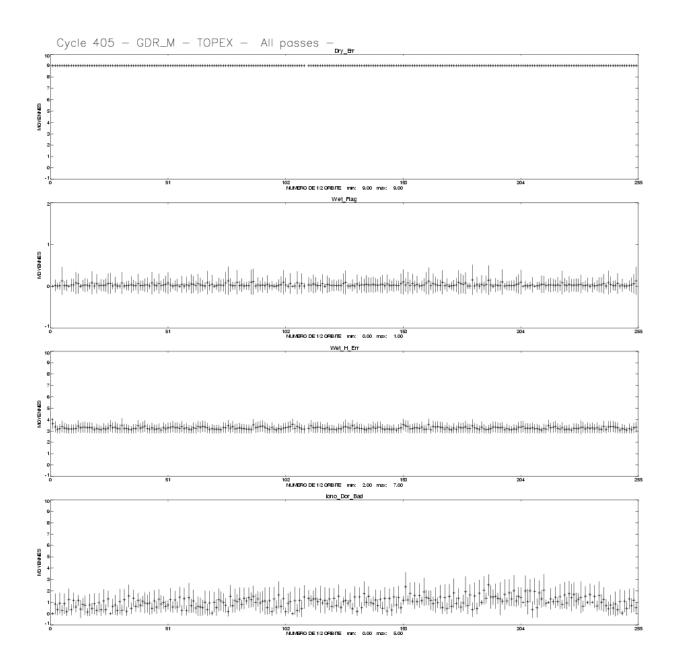


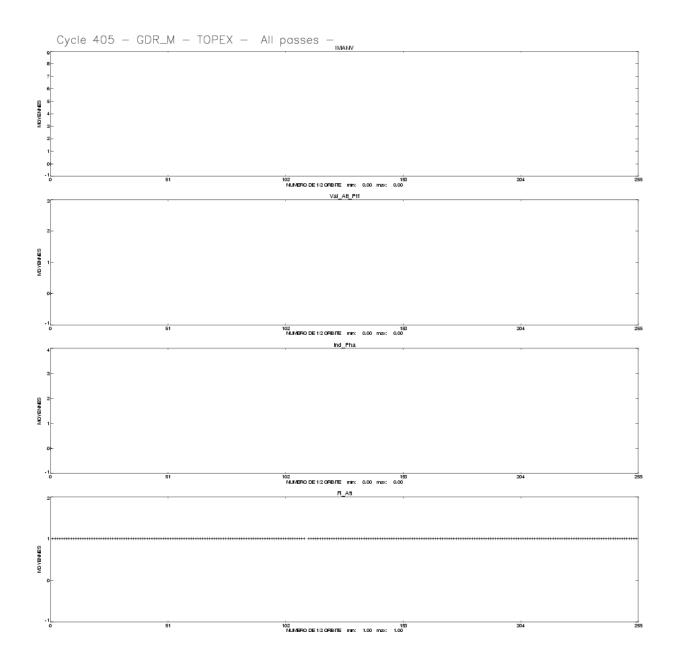




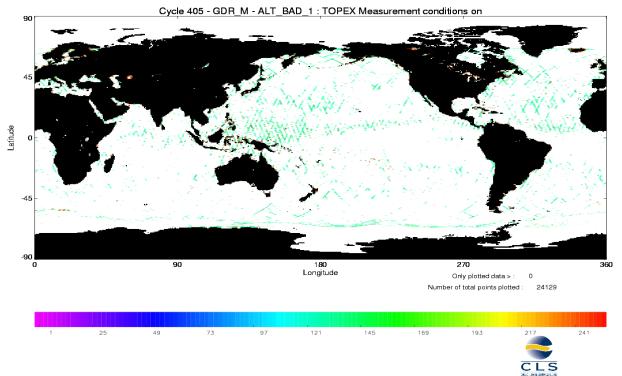

Cycle 405 - GDR\_M - ALT\_BAD\_2 : TOPEX Measurement conditions on

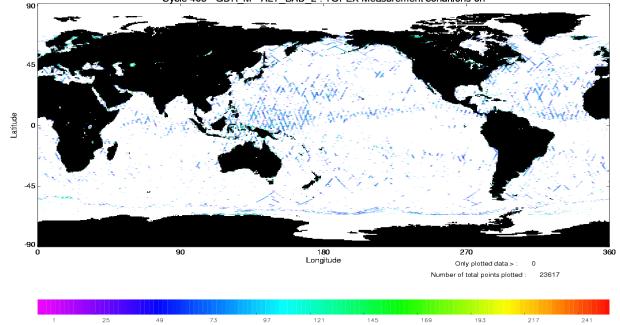




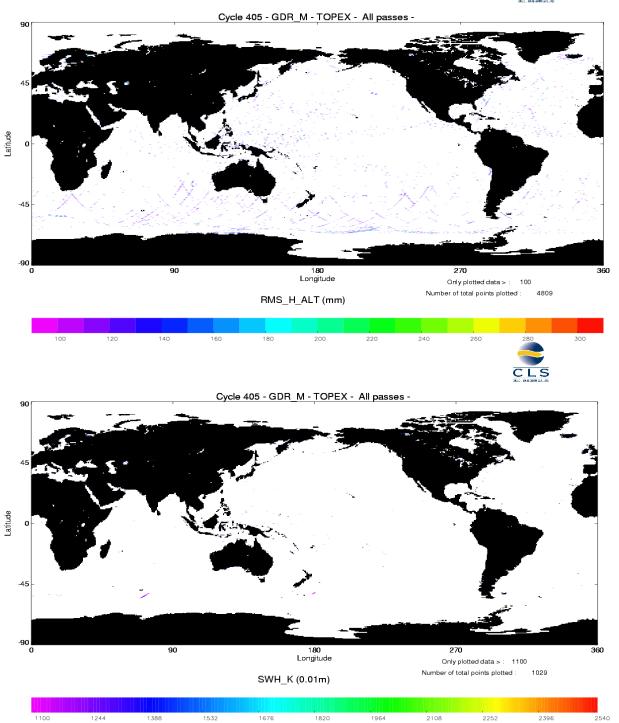

TOPEX/Poseidon GDR Quality Assessment Report Cycle 405 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405



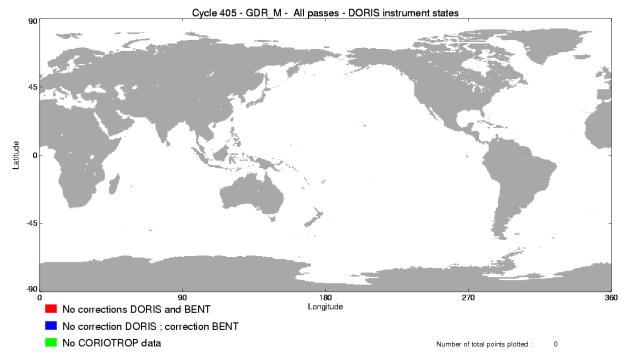

## 3.4 Editing

The following table gives for each tested parameter, minimum and maximum thresholds, the number and the percentage of points removed. As a comparison, the mean percentage over one year (1997) is also given.


There are problems in the interpolation of the TMR parameters since cycle 371 when there are missing measurements (tape recorder failures). These bad measurements are removed by the TMR correction criterion but some of them have been kept. Thus a new criterion has been added to the editing procedure since the cycle 376 to remove all the mesurements where the absolute value of the difference between the TMR correction and the ECMWF model wet tropospheric correction is greater than 20 cm.

Probably due to the interpolation problem with the TMR, some measurements have radiometer land flag unset over land. This has no impact on the valid data because these measurements have been edited by the altimetric parameter criteria. Nevertheless, this anomaly leads to wrong statistics of the edited measurements. Therefore a new criterion has been added in the editing procedure to remove all the measurements for which the radiometer land flag is set to ocean and the altimeter land flag is set to land.

The number and percentage of points removed by each criterion is given on the following table. Note that these statistics are obtained with measurements already edited for radiometer land flag (27.61 % of points removed) and ice flag (8.62 % of points removed).

| Parameters                         | Min      | Max     | Unit | Mean %     | % removed |
|------------------------------------|----------|---------|------|------------|-----------|
|                                    | Thres.   | Thres.  |      | removed in |           |
|                                    |          |         |      | 1997       |           |
| Sea surface height                 | -130.000 | 100.000 | m    | 1.37       | 0.15      |
| Number of 20/10Hz valid points Po- | 5.000    | -       |      | 1.37       | 0.22      |
| seidon/TOPEX                       |          |         |      |            |           |
| Std. deviation of range            | 0.000    | 0.100   | m    | 1.85       | 1.06      |
| Off nadir angle from waveform      | 0.000    | 0.400   | deg  | 1.36       | 3.66      |
| Dry tropospheric correction        | -2.500   | -1.900  | m    | 0.00       | 0.00      |
| Invert barometer correction        | -2.000   | 2.000   | m    | 0.00       | 0.00      |
| TMR wet tropospheric correction    | -0.500   | -0.001  | m    | 0.34       | 2.30      |
| Ionospheric correction (Posei-     | -0.400   | 0.040   | m    | 0.00       | 0.00      |
| don:Doris, TOPEX:Dual)             |          |         |      |            |           |
| Significant wave height            | 0.000    | 11.000  | m    | 1.46       | 0.09      |
| Sea state Bias                     | -0.500   | 0.000   | m    | 1.39       | 0.22      |
| Backscatter coefficient            | 7.000    | 30.000  | dB   | 1.44       | 0.48      |
| Ocean tide height                  | -5.000   | 5.000   | m    | 0.01       | 0.15      |
| Earth tide                         | -1.000   | 1.000   | m    | 0.00       | 0.00      |
| Pole tide                          | -15.000  | 15.000  | m    | 0.00       | 0.00      |
| TMR and ECMWF tropospheric         | -0.200   | 0.200   | m    | NaN        | 0.25      |
| differences                        |          |         |      |            |           |
| Spline fitting                     |          |         |      |            | 0.01      |


The following three maps are complementary: they show respectively the removed, the selected measurements and the percentage of selected measurements in the editing procedure.

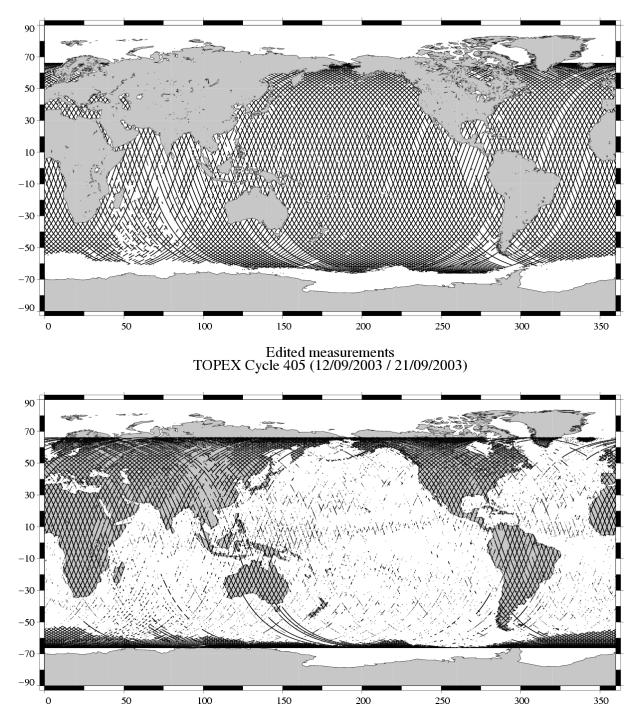


Valid data TOPEX/Poseidon Cycle 405 (12/09/2003 / 21/09/2003)

TOPEX/Poseidon GDR Quality Assessment Report **Cycle 405** 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405


#### Percentage of valid data relative to the nominal pass TOPEX/Poseidon Cycle 405 (12/09/2003 / 21/09/2003)

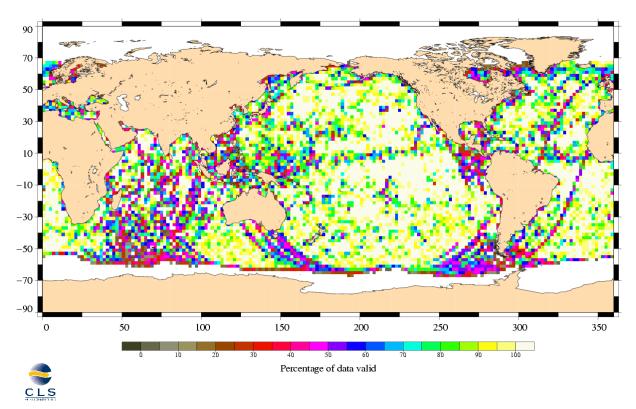



#### 3.5 Ionospheric correction

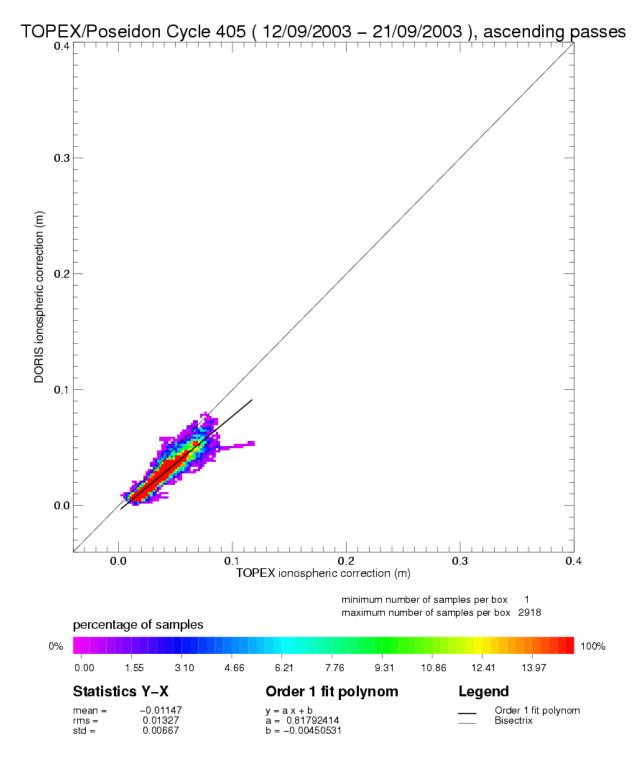



TOPEX/Poseidon GDR Quality Assessment Report **Cycle 405** 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405

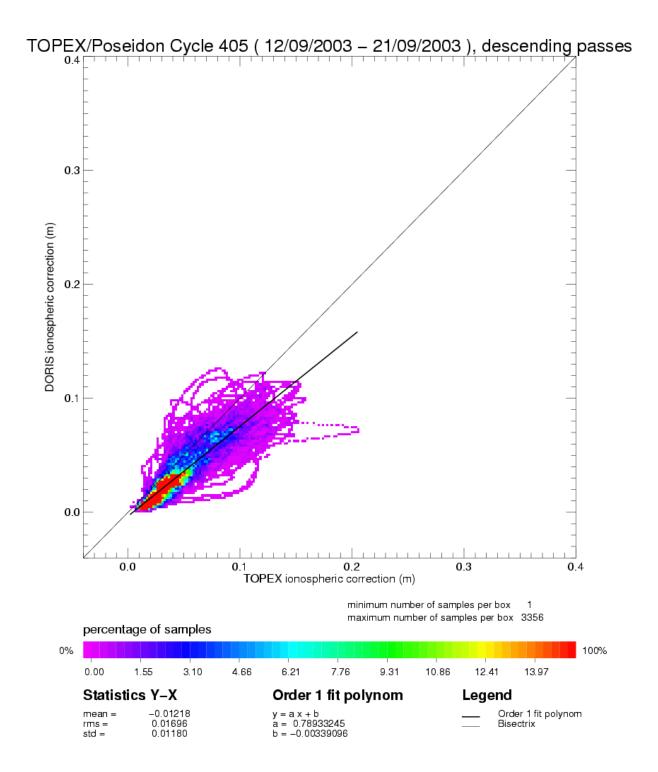


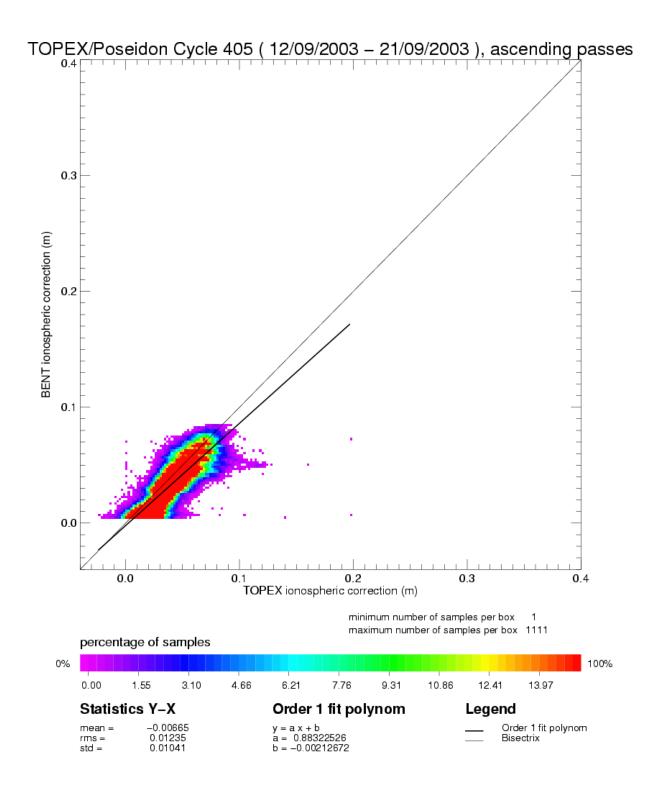

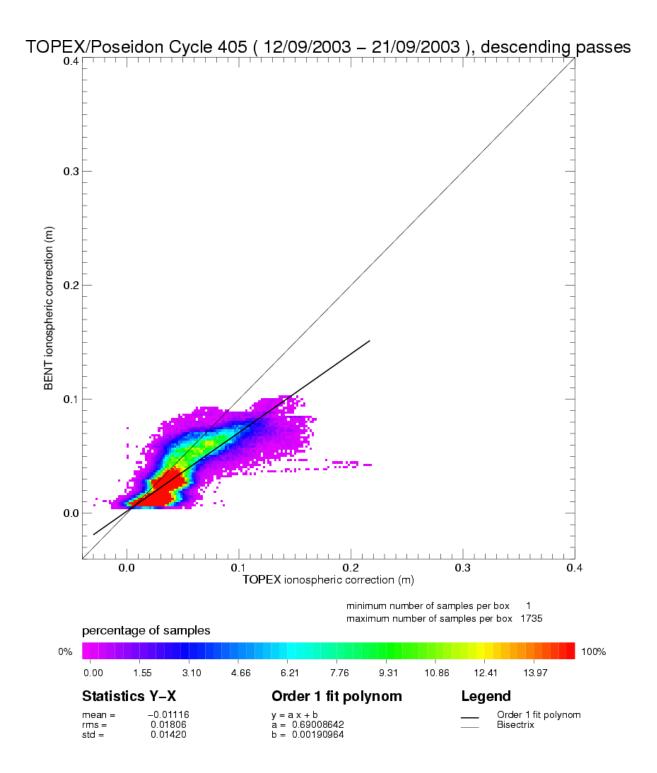

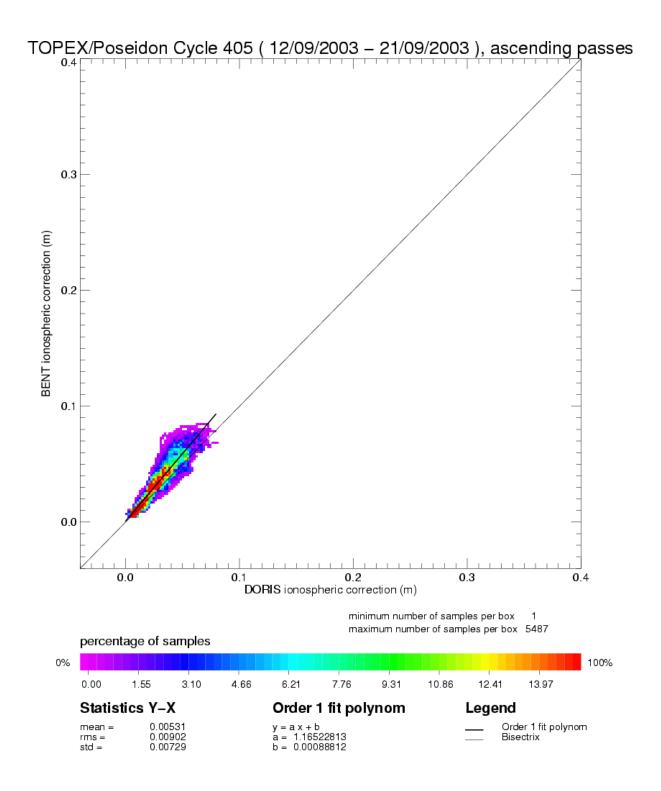


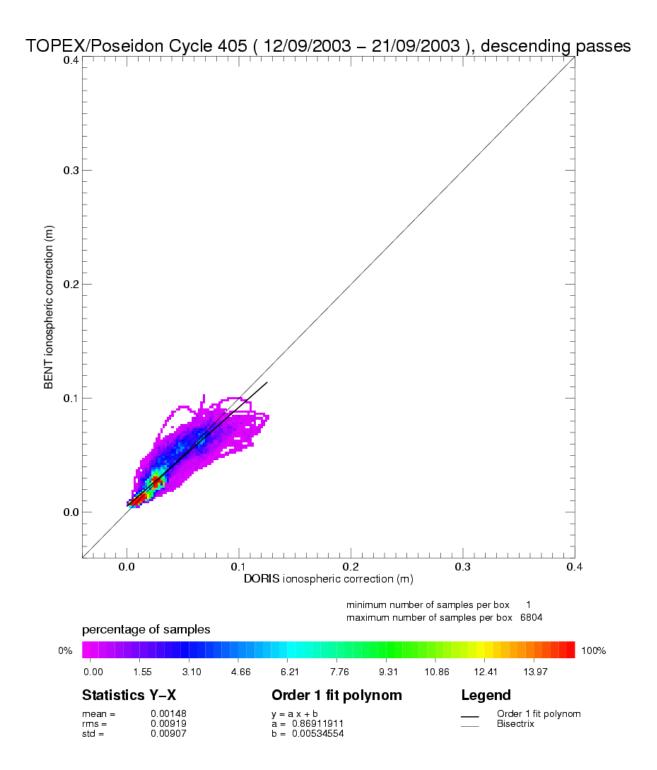

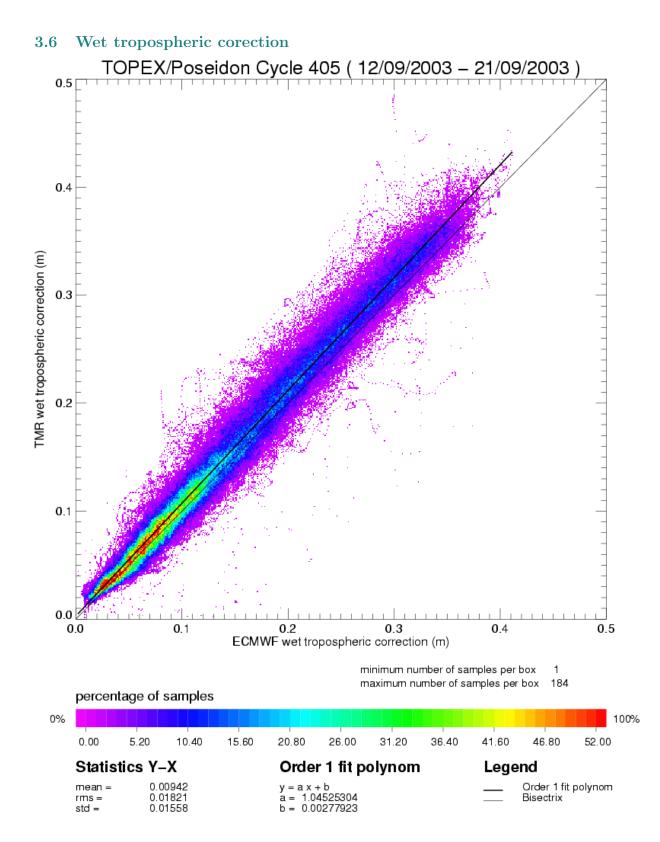



TOPEX/Poseidon GDR Quality Assessment Report Cycle 405 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405

## 3.7 Crossover statistics

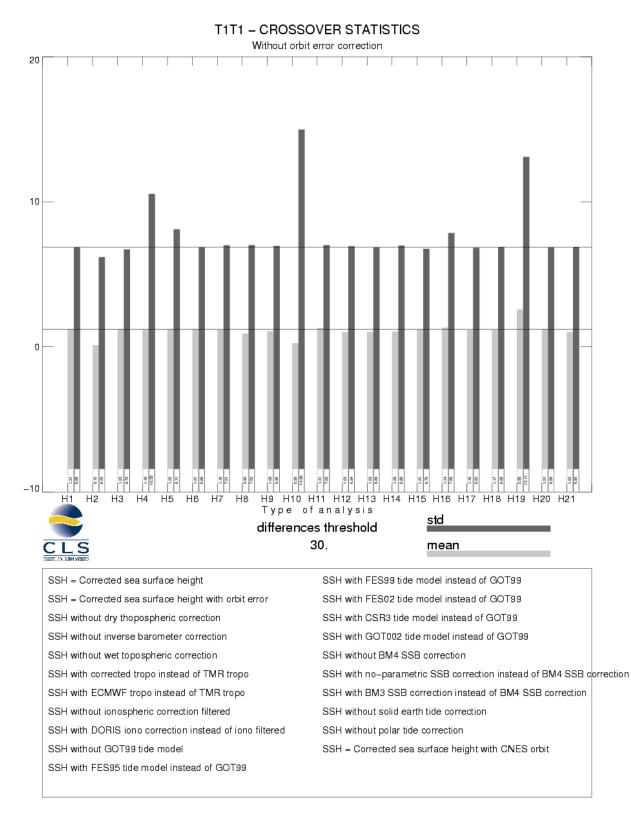


TOPEX/Poseidon GDR Quality Assessment Report Cycle 405 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405 Page 23

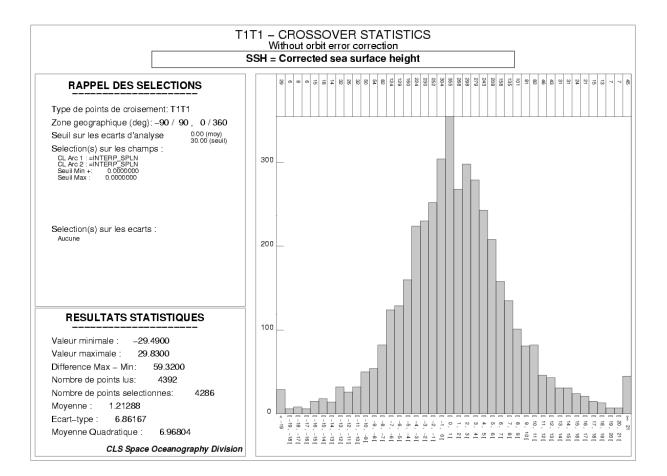

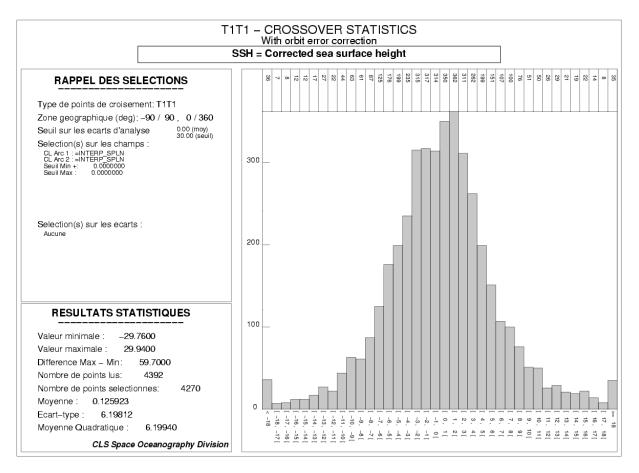

TOPEX/Poseidon GDR Quality Assessment Report Cycle 405 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405

Page 24

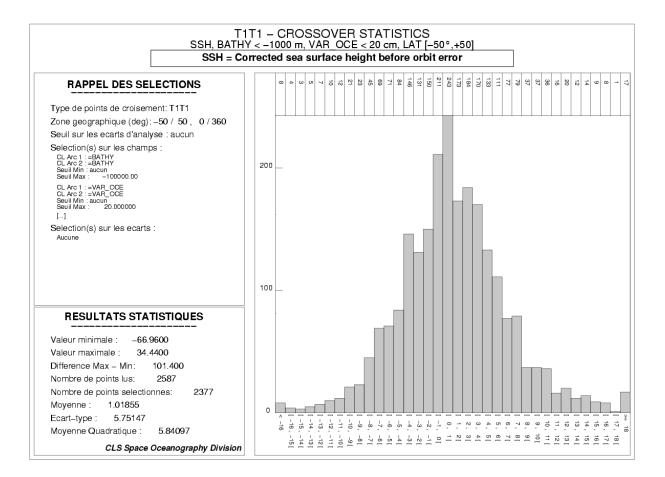


## 3.8 SSH variability

-30

-50

-70 --90 \_

#### 3.8.1 Sea Level Anomaly

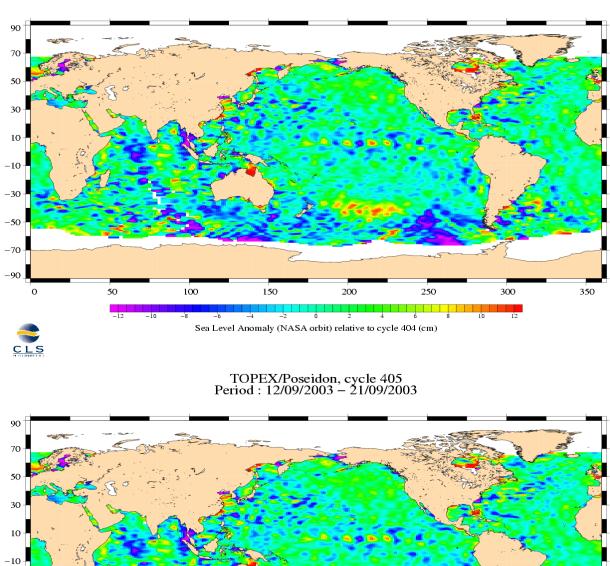

TOPEX/Poseidon, cycle 405 Period : 12/09/2003 – 21/09/2003

TOPEX/Poseidon GDR Quality Assessment Report **Cycle 405** 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405 Page 26

Sea Level Anomaly (Cnes orbit) relative to cycle 404 (cm)

200

250

300


350

150

100


50

#### TOPEX/Poseidon, cycle 405 Period : 12/09/2003 – 21/09/2003

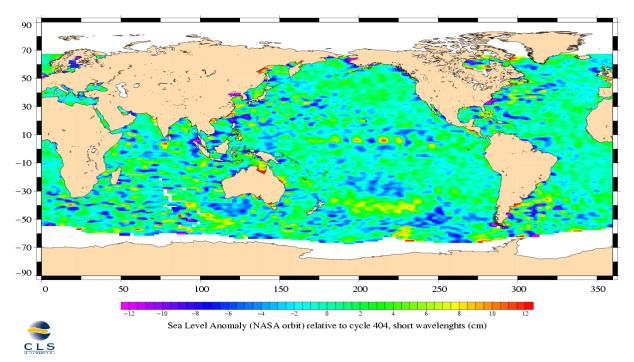

#### 3.8.2 Comparison to a precise Mean Sea Surface


The CLS (2001) MSS model is used as a reference to compute SLA. The two following maps respectively show the map of Topex SLA relative to the MSS and differences higher than a 30 cm threshold (after centering the data). The latter figure shows that higher differences are located in high ocean variability areas, as expected.

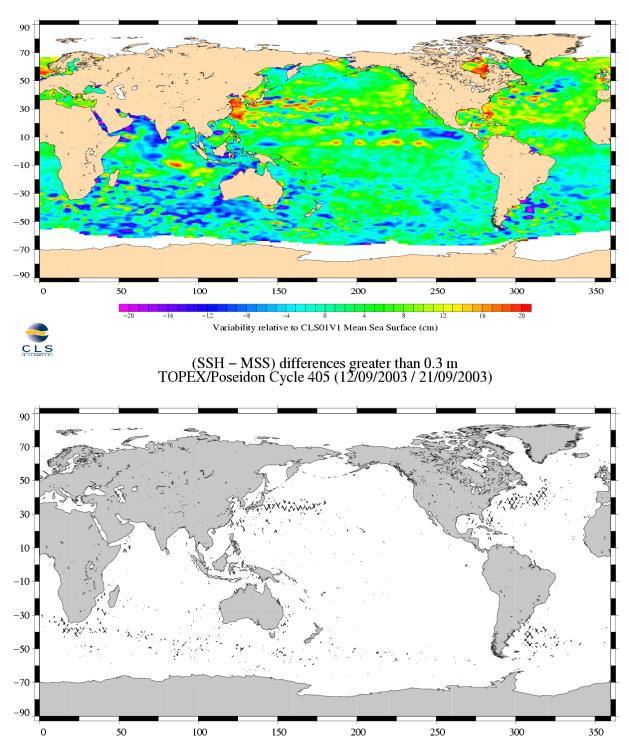

TOPEX/Poseidon, cycle 405 Period : 12/09/2003 – 21/09/2003

TOPEX/Poseidon GDR Quality Assessment Report **Cycle 405** 12-09-2003 21-09-2003 SALP-RP-P2-EX-21072-CLS405 Page 28


## 3.9 Dynamic topography

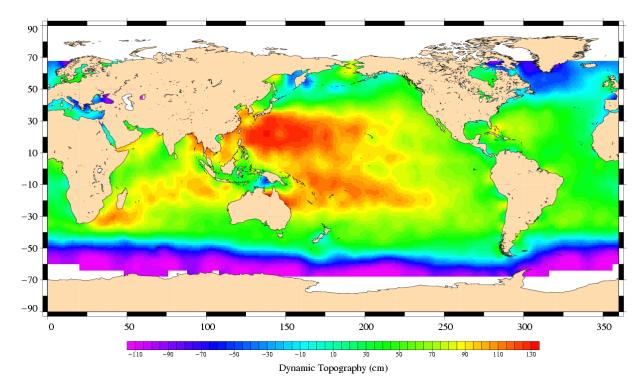



#### 3.10 Wind and wave maps

These two figures show wind and wave estimations derived from 10 days of altimeter measurements.

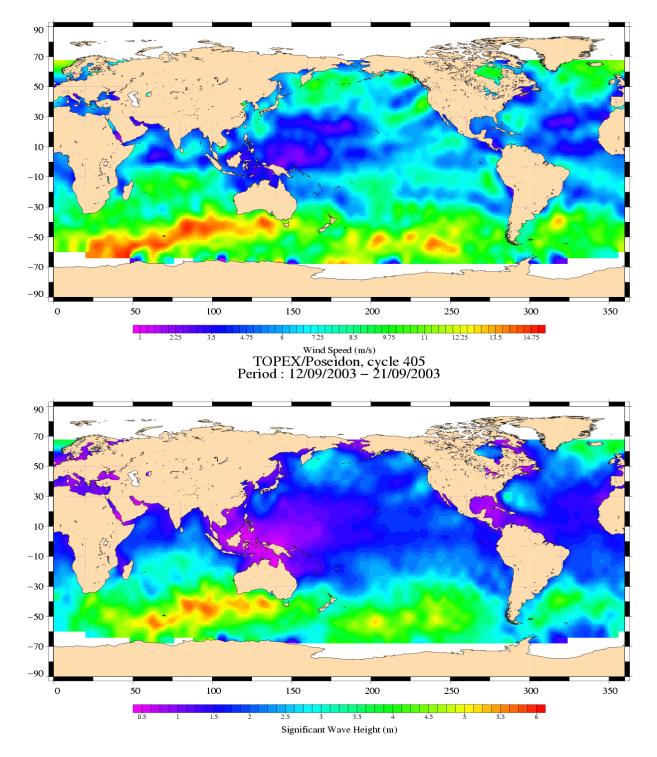

TOPEX/Poseidon, cycle 405 Period : 12/09/2003 – 21/09/2003