

# **TOPEX/Poseidon MGDR Quality Assessment Report**

**Cycle 449** 

21-11-2004 / 01-12-2004

Prepared by:	C. Schgounn, CLS	
	G. Pontonnier, CLS	
	M. Ablain, CLS	
Accepted by :	J. Dorandeu, CLS	
Quality visa:	M. Destouesse, CLS	
Approved by :	N. Picot, CNES	









### 1 Introduction. Document overview

The purpose of this document is to report the major features of the data quality from the Topex/Poseidon mission. The document is associated with data dissemination on a cycle by cycle basis.

The objectives of this document are:

To provide a data quality assessment

To provide users with necessary information for data processing

To report any change likely to impact data quality at any level, from instrument status to software configuration

To present the major useful results for the current cycle

It is divided into the following topics:

Cycle overview CALVAL main results

# 2 Cycle overview

### 2.1 Cycle quality and performances

Data quality for this cycle is nominal.

For this cycle, the crossover standard deviation is 6.40 cm rms. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg.) it decreases down to 5.41 cm rms.

The standard deviation of Sea Level Anomalies (SLA) relative to a 7-year Mean Sea Surface is 11.20 cm. When using a selection to remove shallow waters (1000 m), areas of high ocean variability and high latitudes (> |50| deg), it lowers to 9.40 cm.

### 2.2 Missing measurements

This cycle has no missing pass.

### 2.3 Warnings and recommendations

- Missing measurements :
  - Since October 08th all mission data recovery requirements have been met via TDRSS real time contacts.

Therefore there is a lot of data gaps, especially in the Indian Ocean, between the East and Southeast Pacific basin, in the South Pacific Ocean close to the South and Central America coasts and below the Groenland coasts.

### • Doris switch off:

The DORIS instrument experienced an incident on 01, November 2004. Commands were send to the instrument but the instrument did not respond as espected.


The DORIS instrument was switched from the redundant side on 16, November but all commands send was unsuccessful in returning the instrument in nominal operations. Therefore from this incident all the POE requirements will be met using lasernet tracking data.

### • Measurements edited by the TMR parameters :

The following anomalies are explained by the problems in the interpolation of the TMR parameters due to tape recorder failures:

- -5.58% of the measurements are removed by the TMR correction criterion (see the following figure).
- All measurements of pass 166 are removed by the radiometer land flag criterium.
- Some measurements have radiometer earth flag set to valid over earth. A new criterion has been added to the editing procedure to remove all these measurements (see Editing).

# Edited parameter : Radiometer wet tropospheric correction T/P Cycle 449 (21/11/2004 / 01/12/2004)

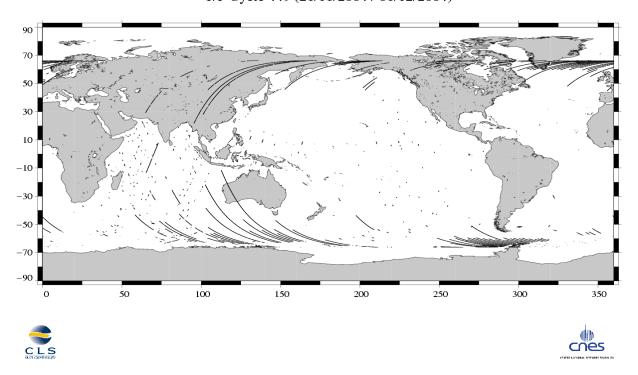


### 3 CALVAL main results


This section presents results that illustrate data quality during this cycle. These verification products are produced operationally so that they allow systematic monitoring of the main relevant parameters.

### 3.1 Missing measurements


625371 altimeter measurements are present, and 169280 are missing.

The map below shows all the available measurements for this cycle and illustrates the tape recorder problems. The latter figure shows missing 1Hz measurements in the GDRs, with respect to a 1 Hz sampling of a nominal repeat track.



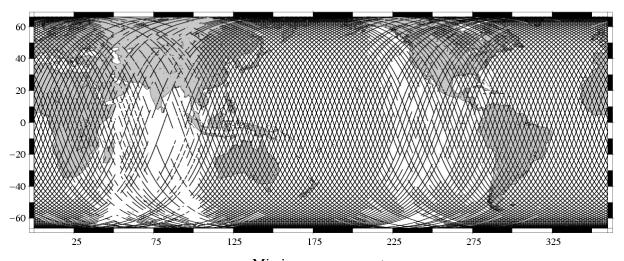

Missing measurements TOPEX/Poseidon Cycle 449 (21/11/2004 / 01/12/2004)

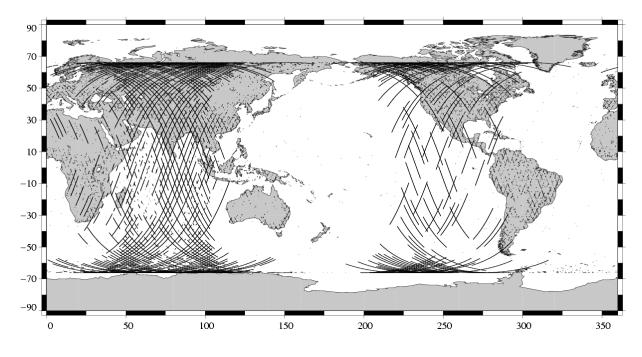


TOPEX/Poseidon GDR Quality Assessment Report Cycle 449 21-11-2004 01-12-2004 SALP-RP-P2-EX-21072-CLS449

# 3.2 M-GDR quality flags


The following table indicates the percentage of measurements for which those flags are set.


Name	Descrition	% bad
Geo_Bad_1	altimeter land flag	25.02
Geo_Bad_1	ice flag	7.12
Geo_Bad_1	radiometer land flag	26.86
Alt_Bad_1	conditions 1 altimeter	4.90
Alt_Bad_2	conditions 2 altimeter	4.71
Geo_Bad_2	rain (liquid water in excess)	9.45
Geo_Bad_2	less than 4 points for CSR3.0 tide calculation	0.41
Geo_Bad_2	less than 4 points for FES95.2.1 tide calculation	2.86
TOPEX	TOPEX not valid	0.00
TMR	TMR not valid	0.00
TMR_Bad	Brightness temperatures not valid	11.23
DORIS	DORIS not valid	0.00


### 3.3 M-GDR parameter plots

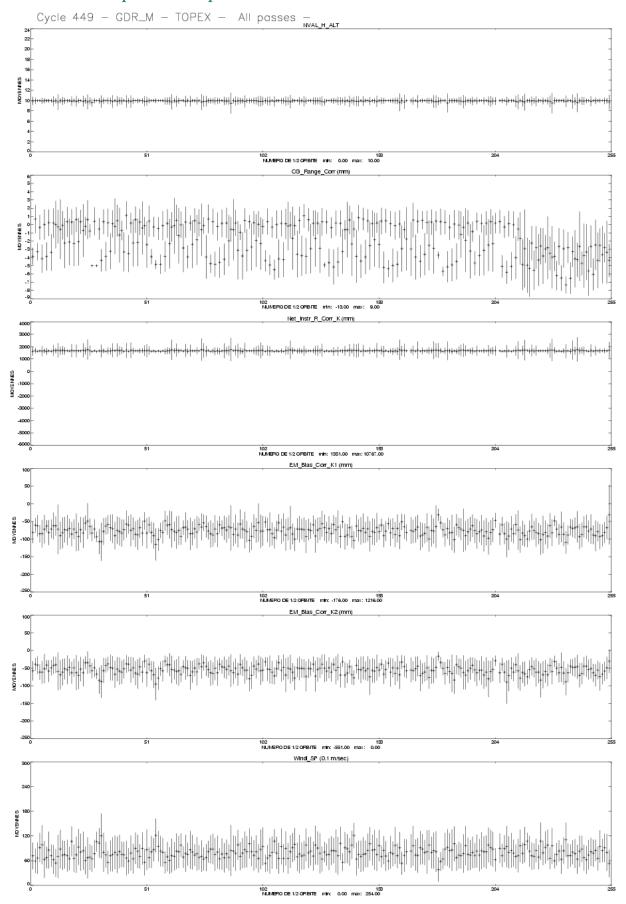


TOPEX/Poseidon GDR Quality Assessment Report Cycle 449 21-11-2004 01-12-2004 SALP-RP-P2-EX-21072-CLS449

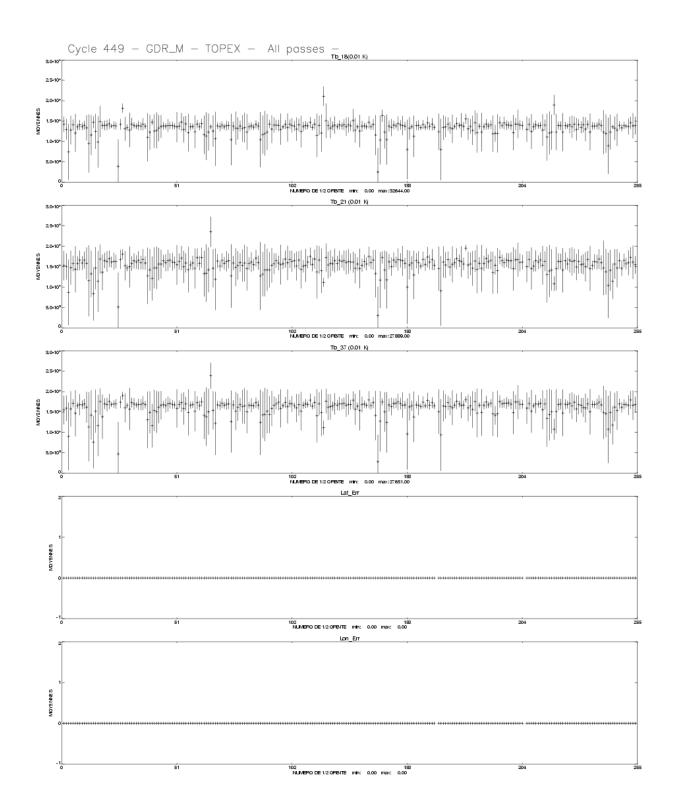


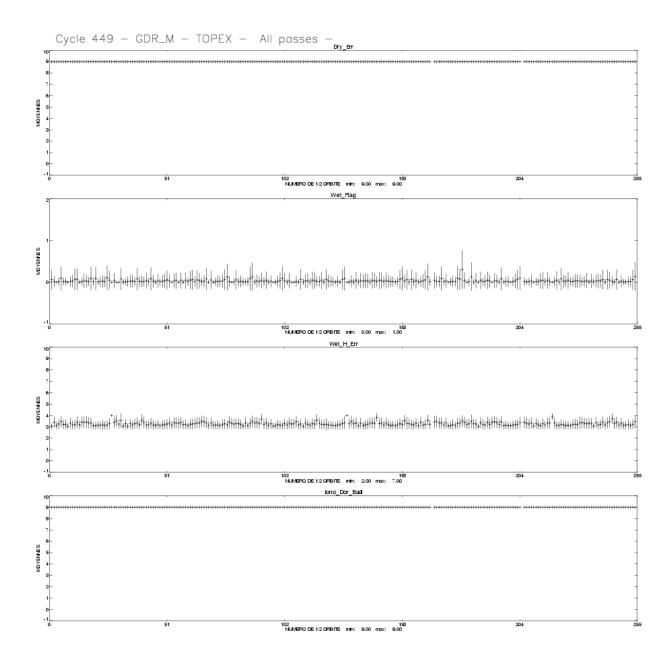

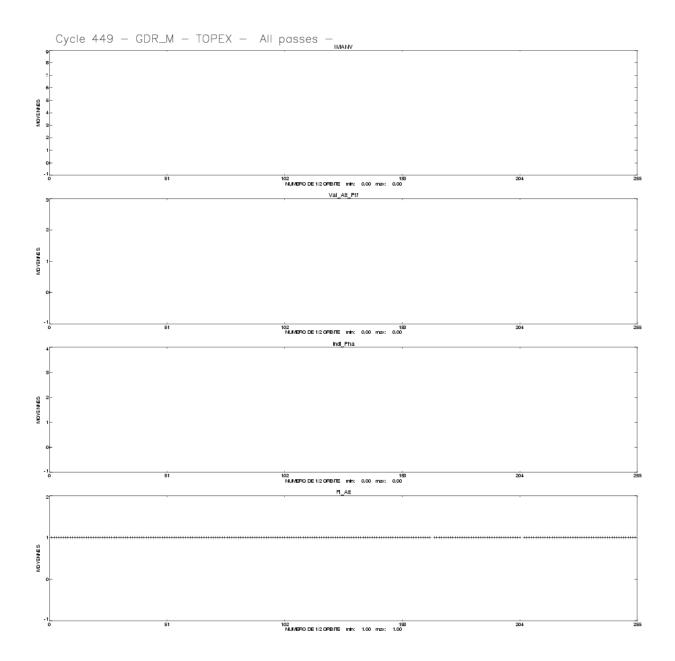





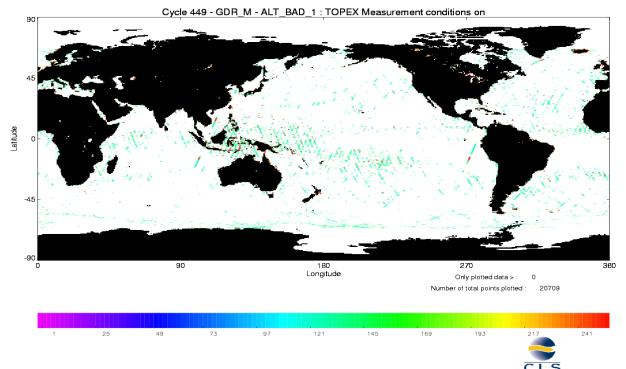

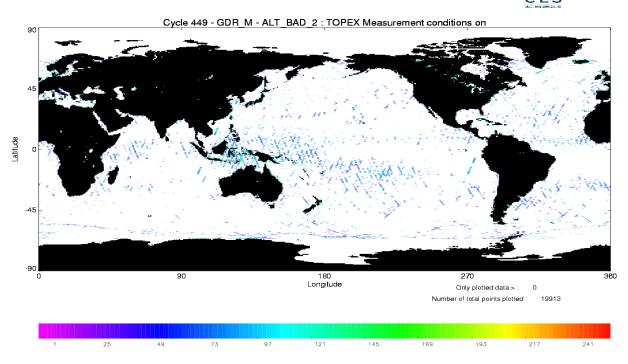




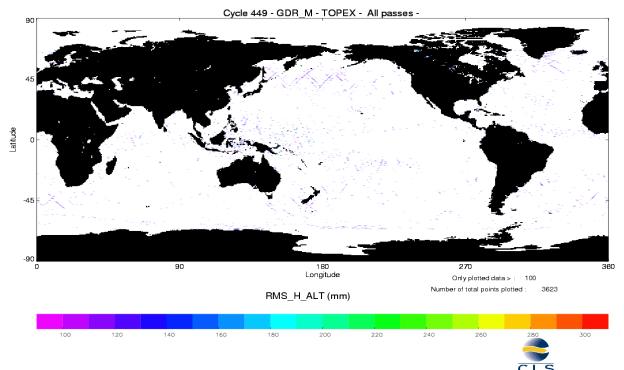

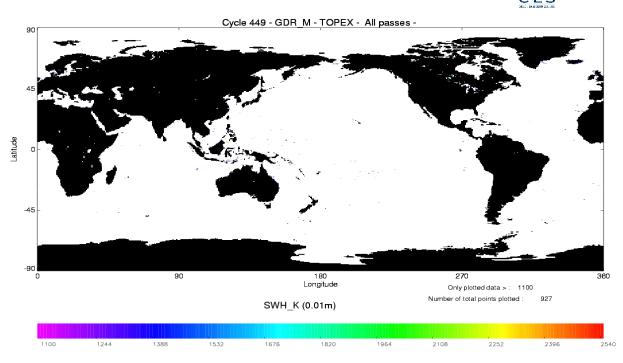



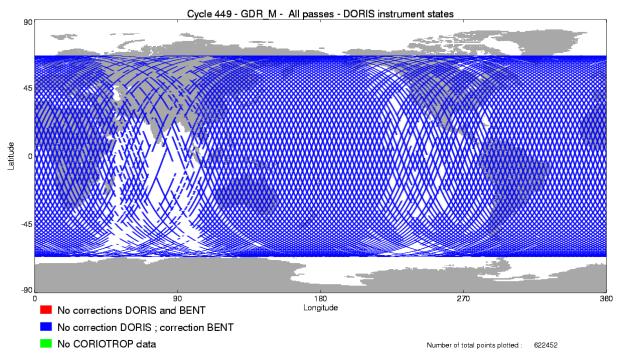

### 3.4 Editing

The following table gives for each tested parameter, minimum and maximum thresholds, the number and the percentage of points removed. As a comparison, the mean percentage over one year (1997) is also given.

There are problems in the interpolation of the TMR parameters since cycle 371 when there are missing measurements (tape recorder failures). These bad measurements are removed by the TMR correction criterion but some of them have been kept. Thus a new criterion has been added to the editing procedure since the cycle 376 to remove all the mesurements where the absolute value of the difference between the TMR correction and the ECMWF model wet tropospheric correction is greater than 20 cm.


Probably due to the interpolation problem with the TMR, some measurements have radiometer land flag unset over land. This has no impact on the valid data because these measurements have been edited by the altimetric parameter criteria. Nevertheless, this anomaly leads to wrong statistics of the edited measurements. Therefore a new criterion has been added in the editing procedure to remove all the measurements for which the radiometer land flag is set to ocean and the altimeter land flag is set to land.

The number and percentage of points removed by each criterion is given on the following table. Note that these statistics are obtained with measurements already edited for radiometer land flag (26.98 % of points removed) and ice flag (7.18 % of points removed).


Parameters	Min Thres.	Max Thres.	Unit	Mean % removed in 1997	% removed
Sea surface height	-130.000	100.000	m	1.37	0.15
Number of 20/10Hz valid points Po-	5.000	-		1.37	0.30
seidon/TOPEX					
Std. deviation of range	0.000	0.100	m	1.85	0.96
Off nadir angle from waveform	0.000	0.400	deg	1.36	3.29
Dry tropospheric correction	-2.500	-1.900	m	0.00	0.00
Invert barometer correction	-2.000	2.000	m	0.00	0.00
TMR wet tropospheric correction	-0.500	-0.001	m	0.34	5.58
Ionospheric correction (Posei-	-0.400	0.040	m	0.00	0.32
don:Doris, TOPEX:Dual)					
Significant wave height	0.000	11.000	m	1.46	0.12
Sea state Bias	-0.500	0.000	m	1.39	0.26
Backscatter coefficient	7.000	30.000	dB	1.44	0.31
Ocean tide height	-5.000	5.000	m	0.01	0.14
Earth tide	-1.000	1.000	m	0.00	0.00
Pole tide	-15.000	15.000	m	0.00	0.00
TMR and ECMWF tropospheric	-0.200	0.200	m	NaN	0.40
differences					
Spline fitting					0.01

The following three maps are complementary: they show respectively the removed, the selected measurements and the percentage of selected measurements in the editing procedure.


Valid data TOPEX/Poseidon Cycle 449 (21/11/2004 / 01/12/2004)

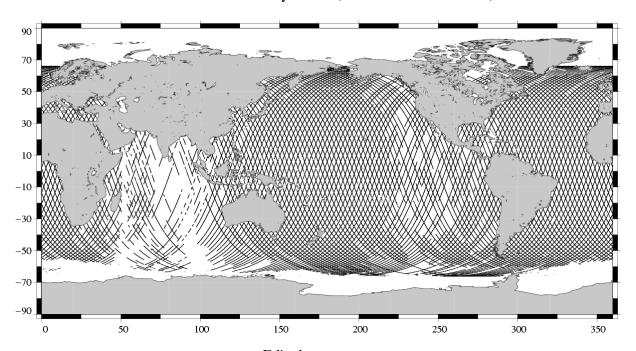


Edited measurements TOPEX Cycle 449 (21/11/2004 / 01/12/2004)

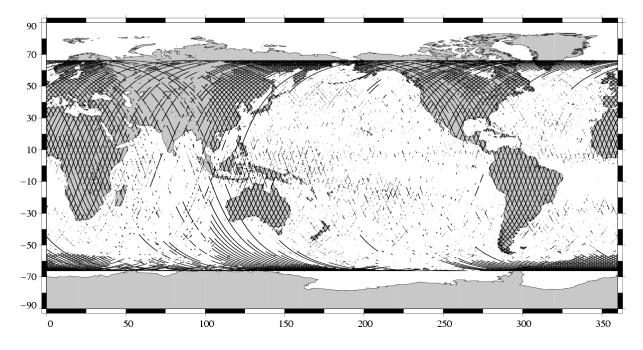


# Percentage of valid data relative to the nominal pass TOPEX/Poseidon Cycle 449 (21/11/2004 / 01/12/2004)

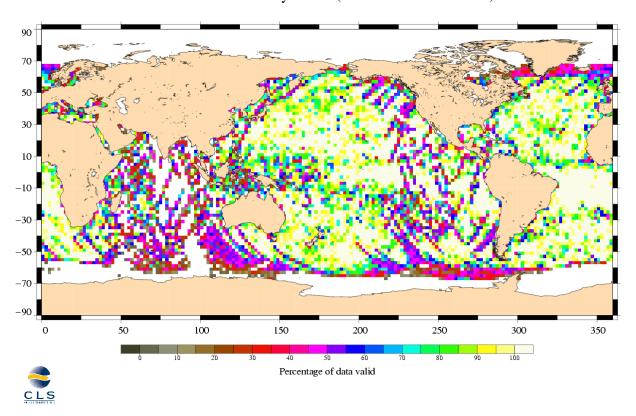


### 3.5 Ionospheric correction

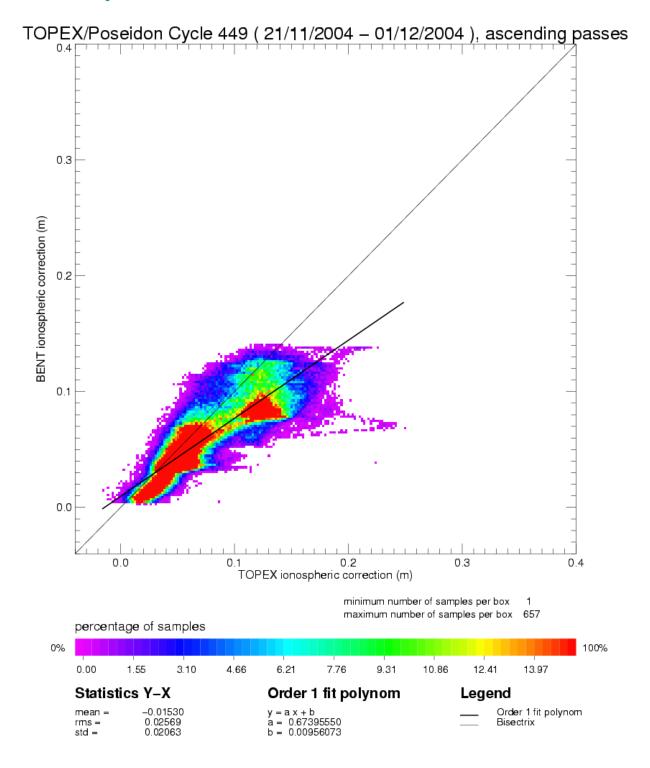

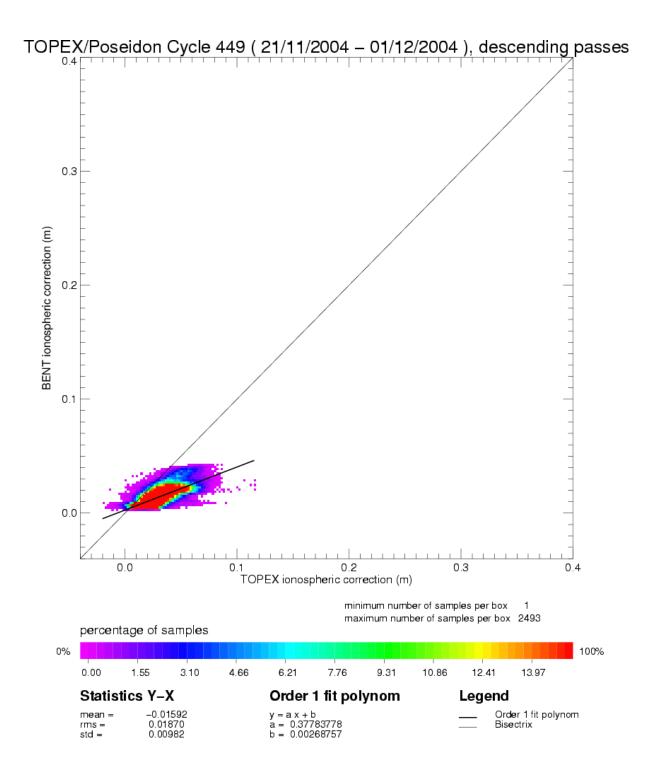


### 3.6 Wet tropospheric corection

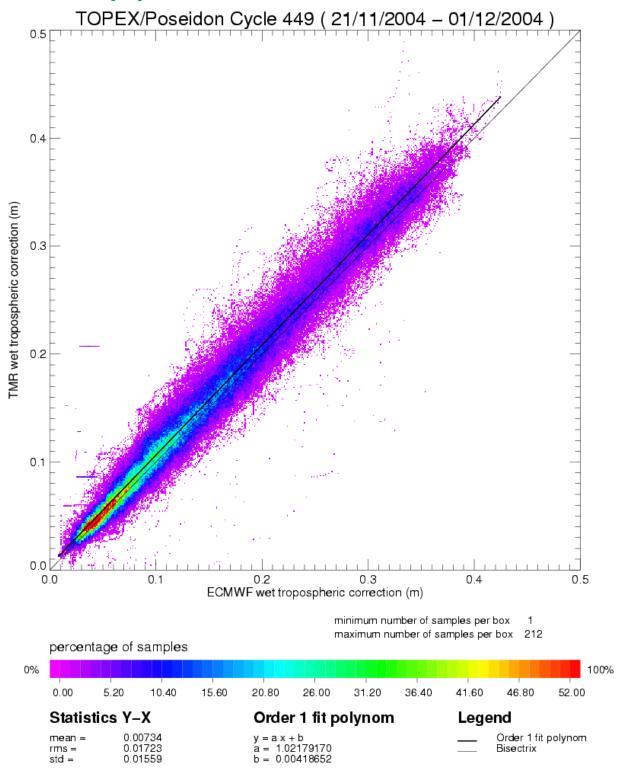

### 3.7 Crossover statistics



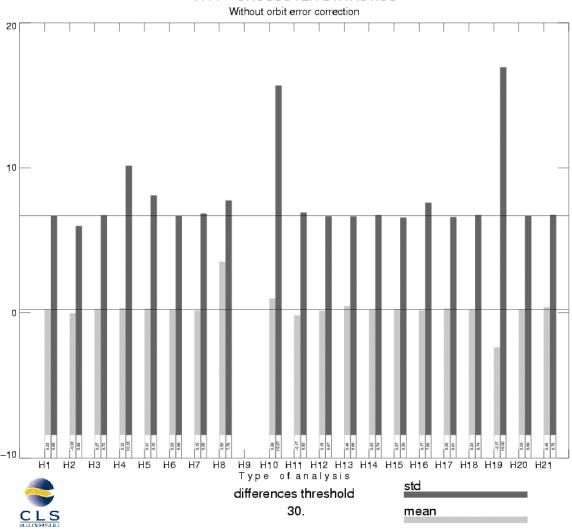

SSH = Corrected sea surface height

SSH = Corrected sea surface height with orbit error

SSH without dry thopospheric correction

SSH without inverse barometer correction

SSH without wet topospheric correction

SSH with corrected tropo instead of TMR tropo

SSH with ECMWF tropo instead of TMR tropo

SSH without ionospheric correction filtered

SSH with DORIS iono correction instead of iono filtered

SSH without GOT99 tide model

SSH with FES95 tide model instead of GOT99

SSH with FES99 tide model instead of GOT99

SSH with FES02 tide model instead of GOT99

SSH with CSR3 tide model instead of GOT99

SSH with GOT002 tide model instead of GOT99

SSH without BM4 SSB correction

SSH with no-parametric SSB correction instead of BM4 SSB correction

SSH with BM3 SSB correction instead of BM4 SSB correction

SSH without solid earth tide correction

SSH without polar tide correction

SSH = Corrected sea surface height with CNES orbit


# - CROSSOVER STATISTICS Without orbit error correction SSH = Corrected sea surface height RAPPEL DES SELECTIONS Type de points de croisement: T1T1 Zone geographique (deg): -90 / 90, 0 / 360 Seuil sur les ecarts d'analyse Selection(s) sur les champs : CL Arc 1 :=INTERP\_SPLN CL Arc 2 :=INTERP\_SPLN Seuil Min +: 0.0000000 Seuil Max : 0.0000000 200 Selection(s) sur les ecarts : Aucune 100 **RESULTATS STATISTIQUES** Valeur minimale: -29.6800 Valeur maximale: Difference Max - Min: 59.4400 Nombre de points lus:

Nombre de points selectionnes:

Moyenne: 0.233148 Ecart-type: 6.69005 Moyenne Quadratique: 3507

6.69412

CLS Space Oceanography Division

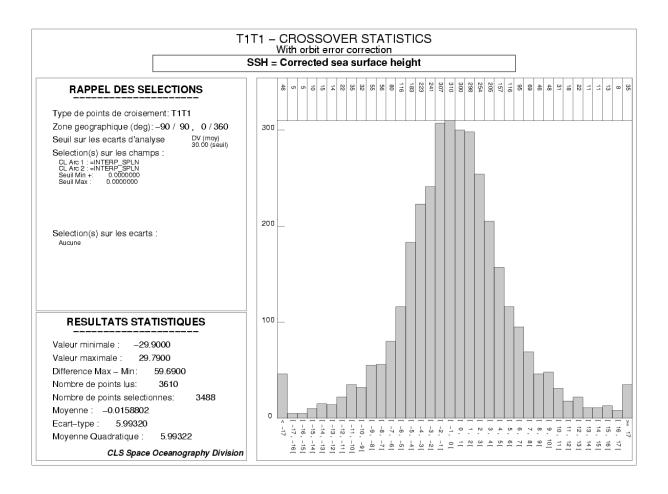

#### T1T1 - CROSSOVER STATISTICS SSH, BATHY < -1000 m, VAR OCE < 20 cm, LAT [-50 $^{\circ}$ ,+50] SSH = Corrected sea surface height before orbit error **RAPPEL DES SELECTIONS** Type de points de croisement: T1T1 190 Zone geographique (deg): -50 / 50, 0 / 360Seuil sur les ecarts d'analyse : aucun 180 Selection(s) sur les champs : 170 CL Arc 1:=BATHY CL Arc 2:=BATHY Seuil Min:aucun Seuil Max: -100000.00 160 150 CL Arc 1 := VAR\_OCE CL Arc 2 := VAR\_OCE Seuil Min : aucun Seuil Max : 20.000000 140 130 [...] 120 Selection(s) sur les ecarts : Aucune 110 100 90 80 70 **RESULTATS STATISTIQUES** 60 Valeur minimale : -30.6400 Valeur maximale : Difference Max - Min: 59.2600 Nombre de points lus: 20 Nombre de points selectionnes: 2071 10 Moyenne: 0.404587

Ecart-type : 5.40674


Moyenne Quadratique: 5.42186

CLS Space Oceanography Division


### 3.8 SSH variability

### 3.8.1 Sea Level Anomaly


TOPEX/Poseidon, cycle 449 Period : 21/11/2004 – 01/12/2004

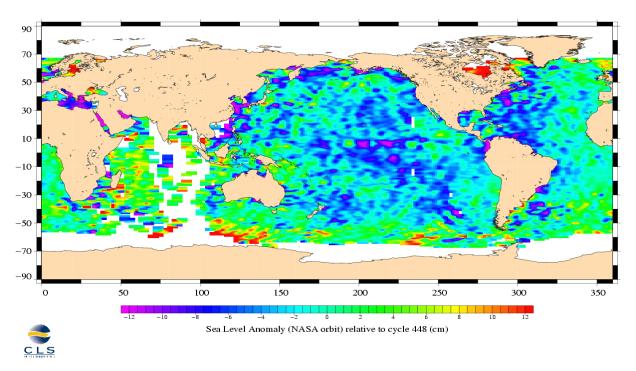

TOPEX/Poseidon, cycle 449 Period : 21/11/2004 – 01/12/2004

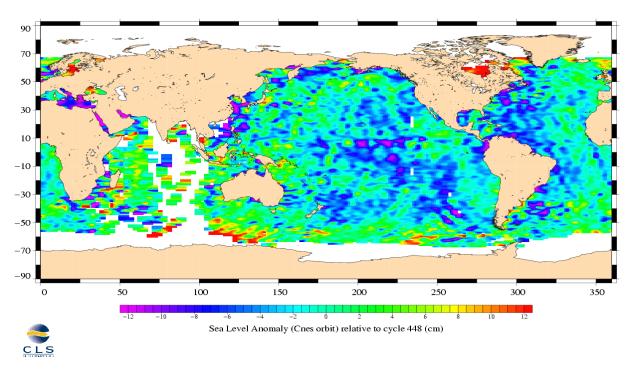


### TOPEX/Poseidon, cycle 449 Period : 21/11/2004 – 01/12/2004

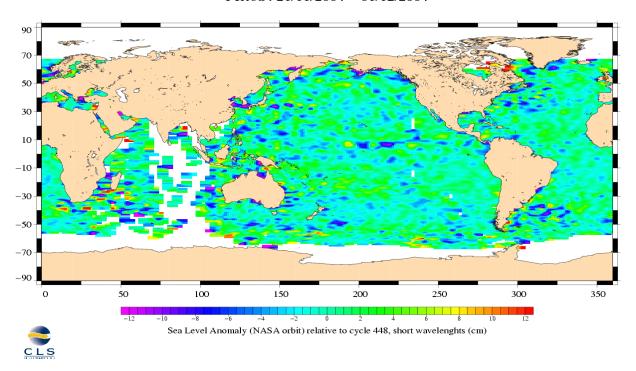


### 3.8.2 Comparison to a precise Mean Sea Surface

The CLS (2001) MSS model is used as a reference to compute SLA. The two following maps respectively show the map of Topex SLA relative to the MSS and differences higher than a 30 cm threshold (after centering the data). The latter figure shows that higher differences are located in high ocean variability areas, as expected.



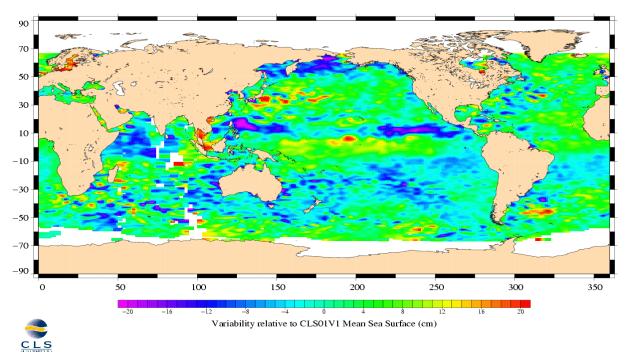


(SSH – MSS) differences greater than 0.3 m TOPEX/Poseidon Cycle 449 (21/11/2004 / 01/12/2004)

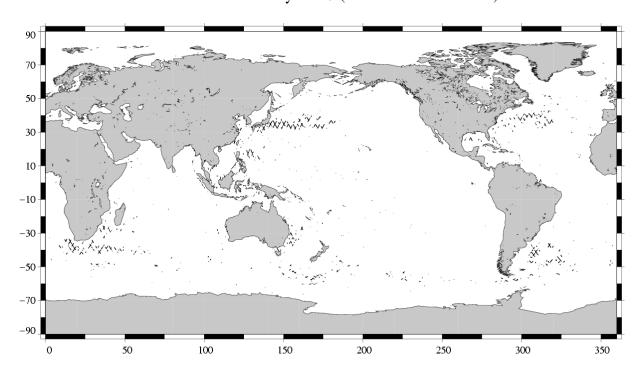

# 3.9 Dynamic topography


TOPEX/Poseidon, cycle 449 Period : 21/11/2004 – 01/12/2004

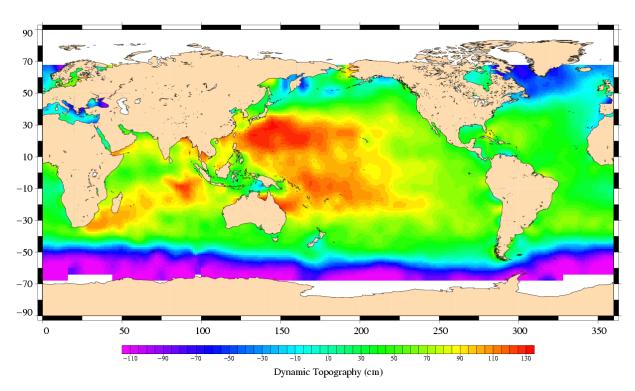

### 3.10 Wind and wave maps

These two figures show wind and wave estimations derived from 10 days of altimeter measurements.

TOPEX/Poseidon, cycle 449 Period : 21/11/2004 – 01/12/2004

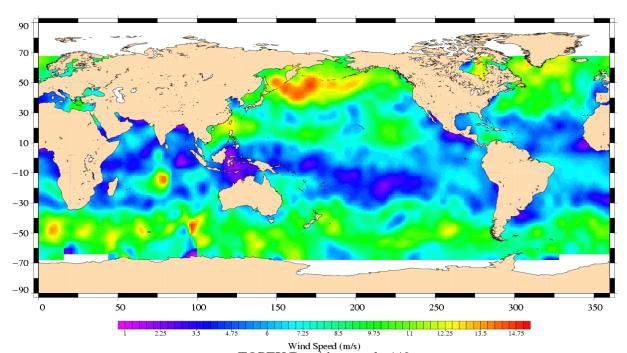

Wind Speed (m/s)
TOPEX/Pose idon, cycle 449
Period: 21/11/2004 - 01/12/2004

